
Pro-SIGNAL	PART NO.		REVISIONS							
	ABM-708-RC	ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
		-	Α	RELEASED	Veena	14/09/09	Ramya	14/09/09	Farnell	28/09/09



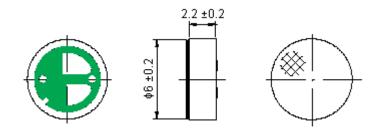

Dimensions : Millimetres

## Specifications:

Directivity	: Unit directional.
Standard operating voltage	: 2V.
Maximum operating voltage	: 10V.
Maximum current consumption	: 0.5mA.
Output impedance (F = 1KHz 1Pa)	: <2.2K Ohms.
Frequency	: 50 to 16,000Hz.
Sensitivity (at F = 1KHz, 0dB = 1V/Pa)	: -47 ±3dB.
Signal to noise ratio (F = 1KHz 1Pa) weighted	: >58dB.

## Part Number Table

Description	Part Number			
Microphone, Solder Pad	ABM-708-RC			

http://www.farnell.com

http://www.newark.com

http://www.cpc.co.uk

(the Group ) of are indensed to it. No incence is granted on the use of its other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change with- out notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the prod- ucts for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or	TOLERANCES:	DRAWN BY:	DATE:	DRAWING TITLE:				
	UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	Veena	14/09/09	Microphone - Solder Pad				
		CHECKED BY:	DATE:	SIZE DWG NO.	EL	ECTRONIC FILE	REV A	
		Ramya	14/09/09	Δ	173	86564-TDS DWG		
		APPROVED BY:	DATE:		I		<u> </u>	
		Farnell	28/09/09	SCALE: NTS	U.O.M.: mm	SHEET: 1 OF	F 1	