

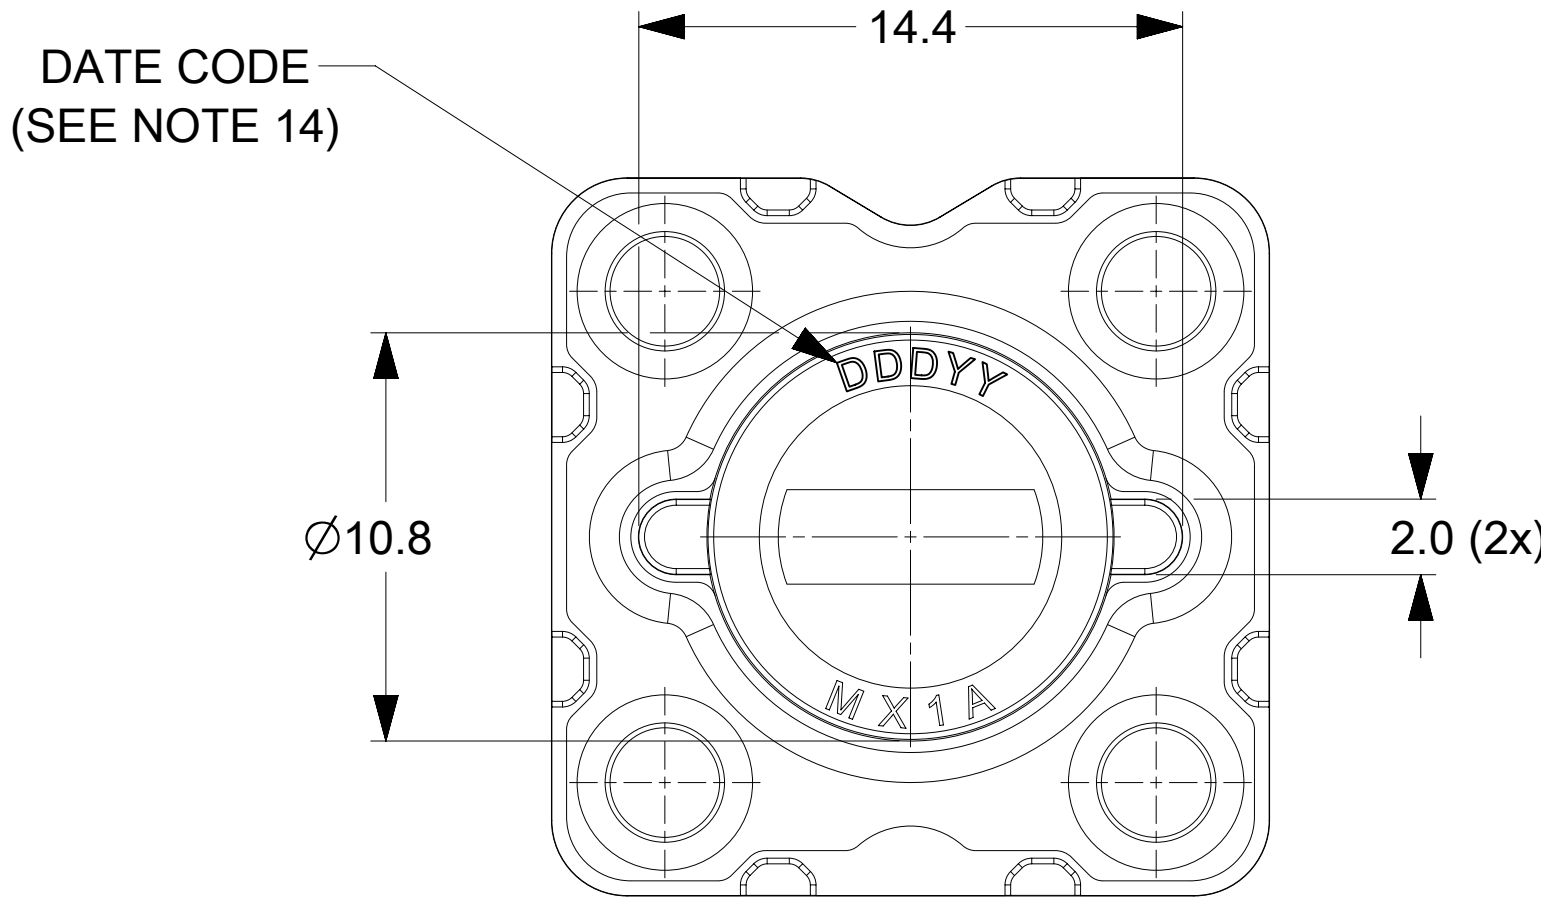
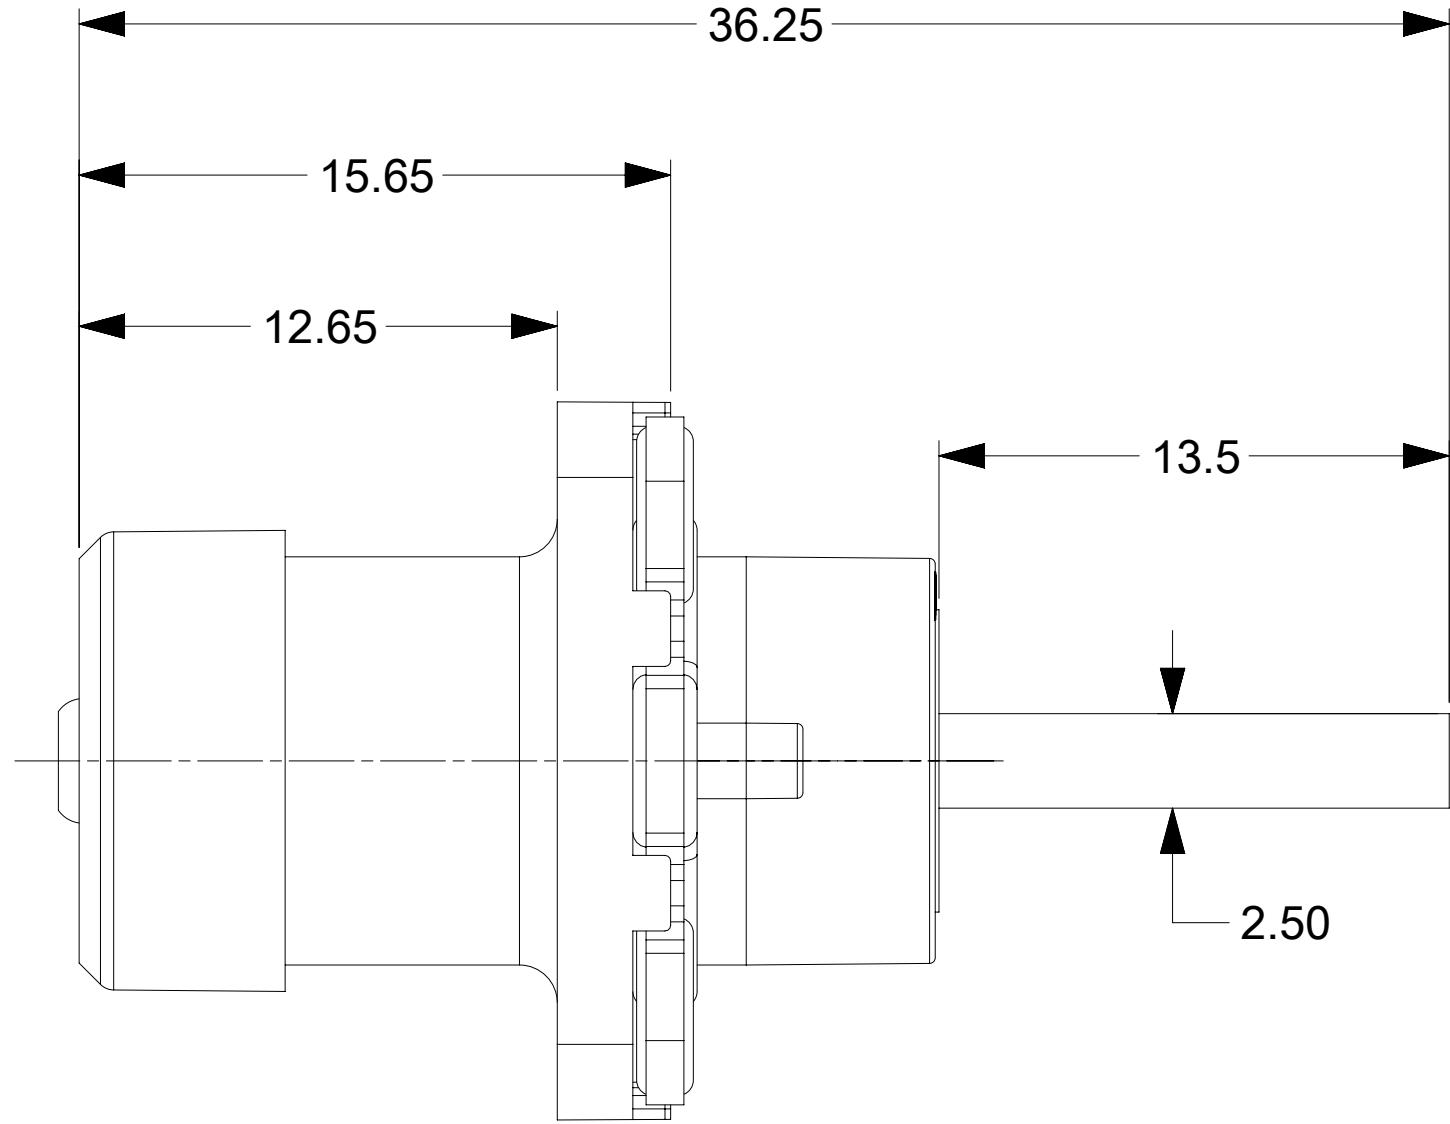
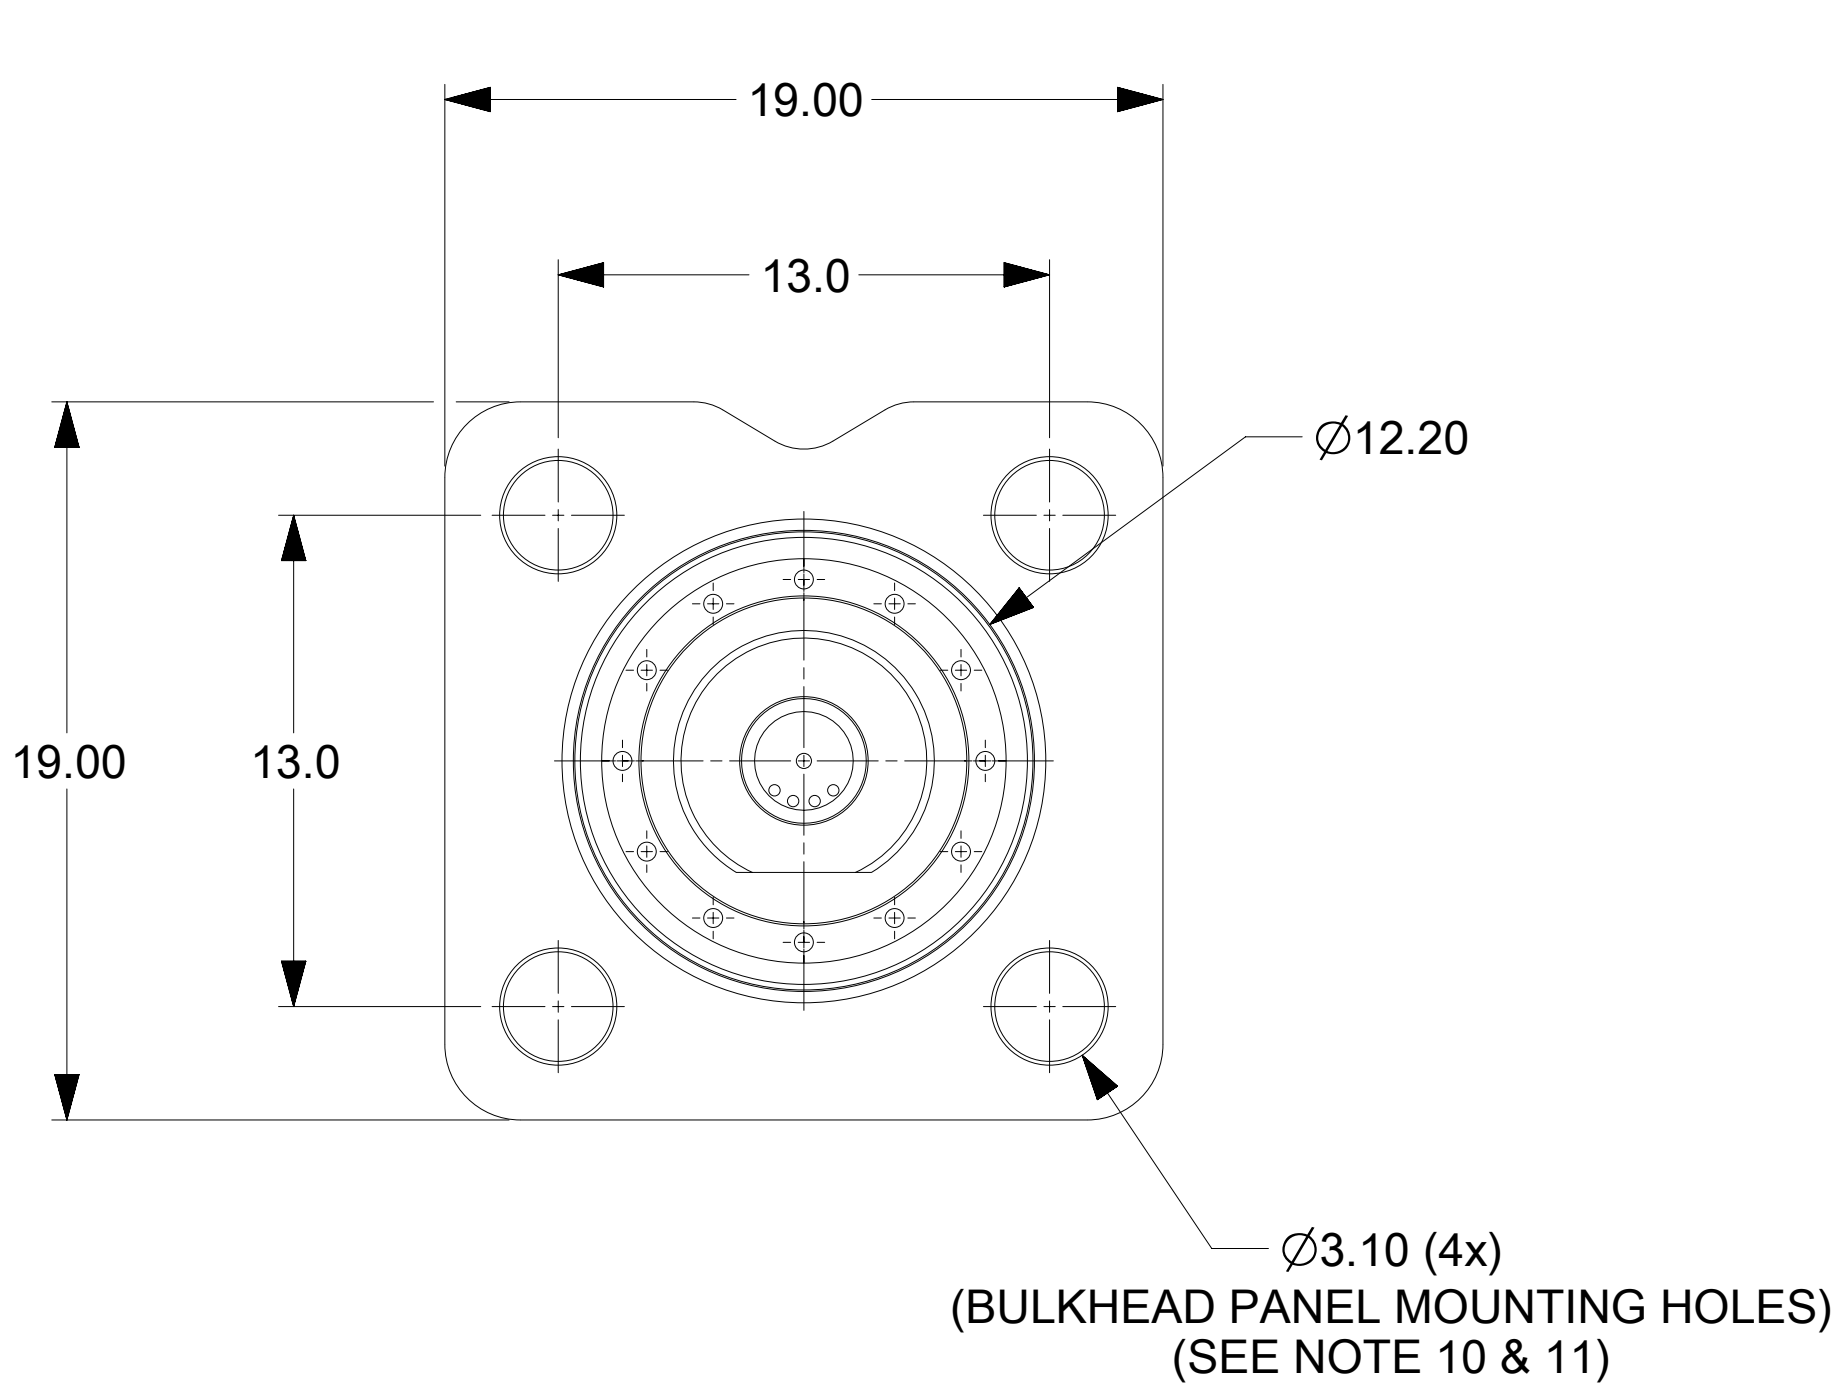


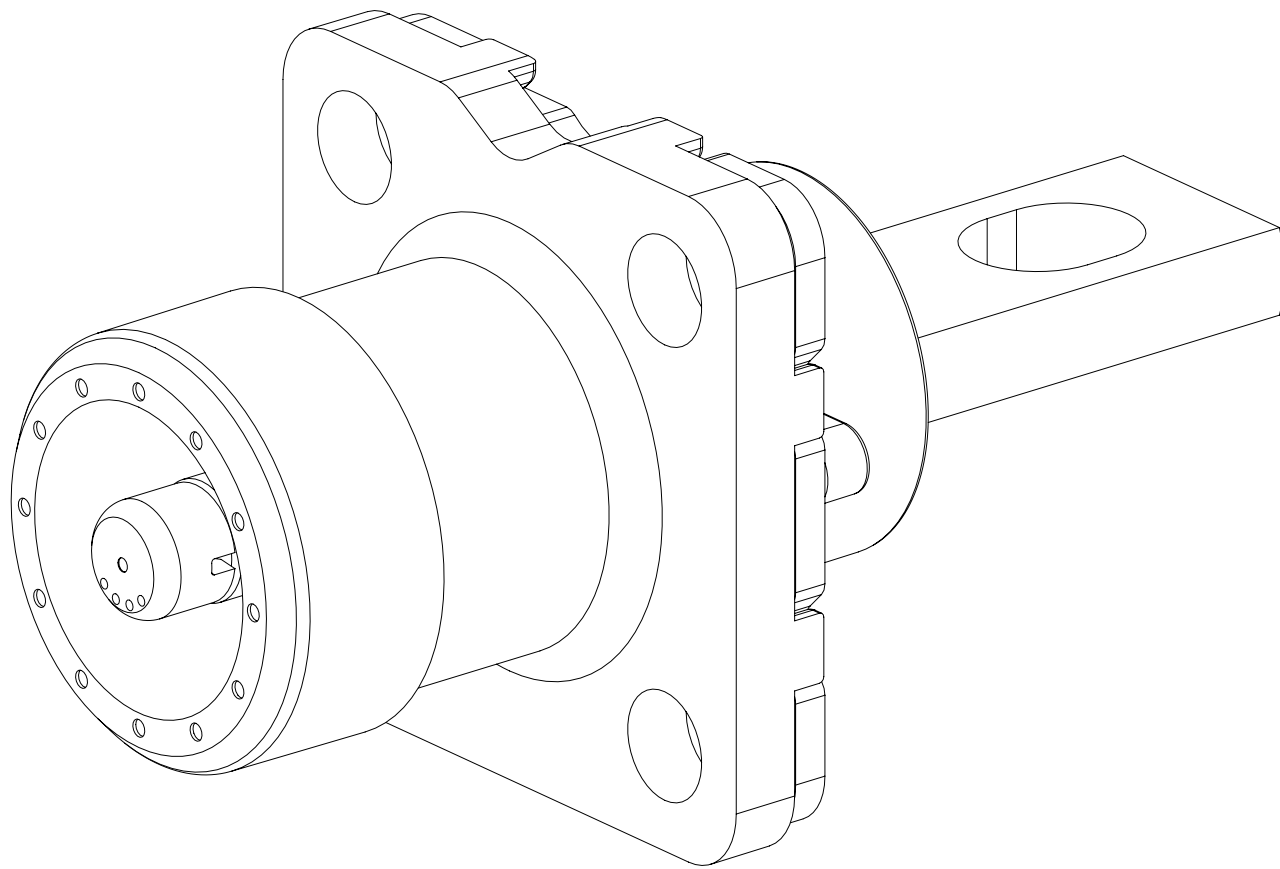

SL NO.	PART NUMBER	COLOR
1	2239880001	BLACK
2	2239880002	RED
3	2239880003	ORANGE

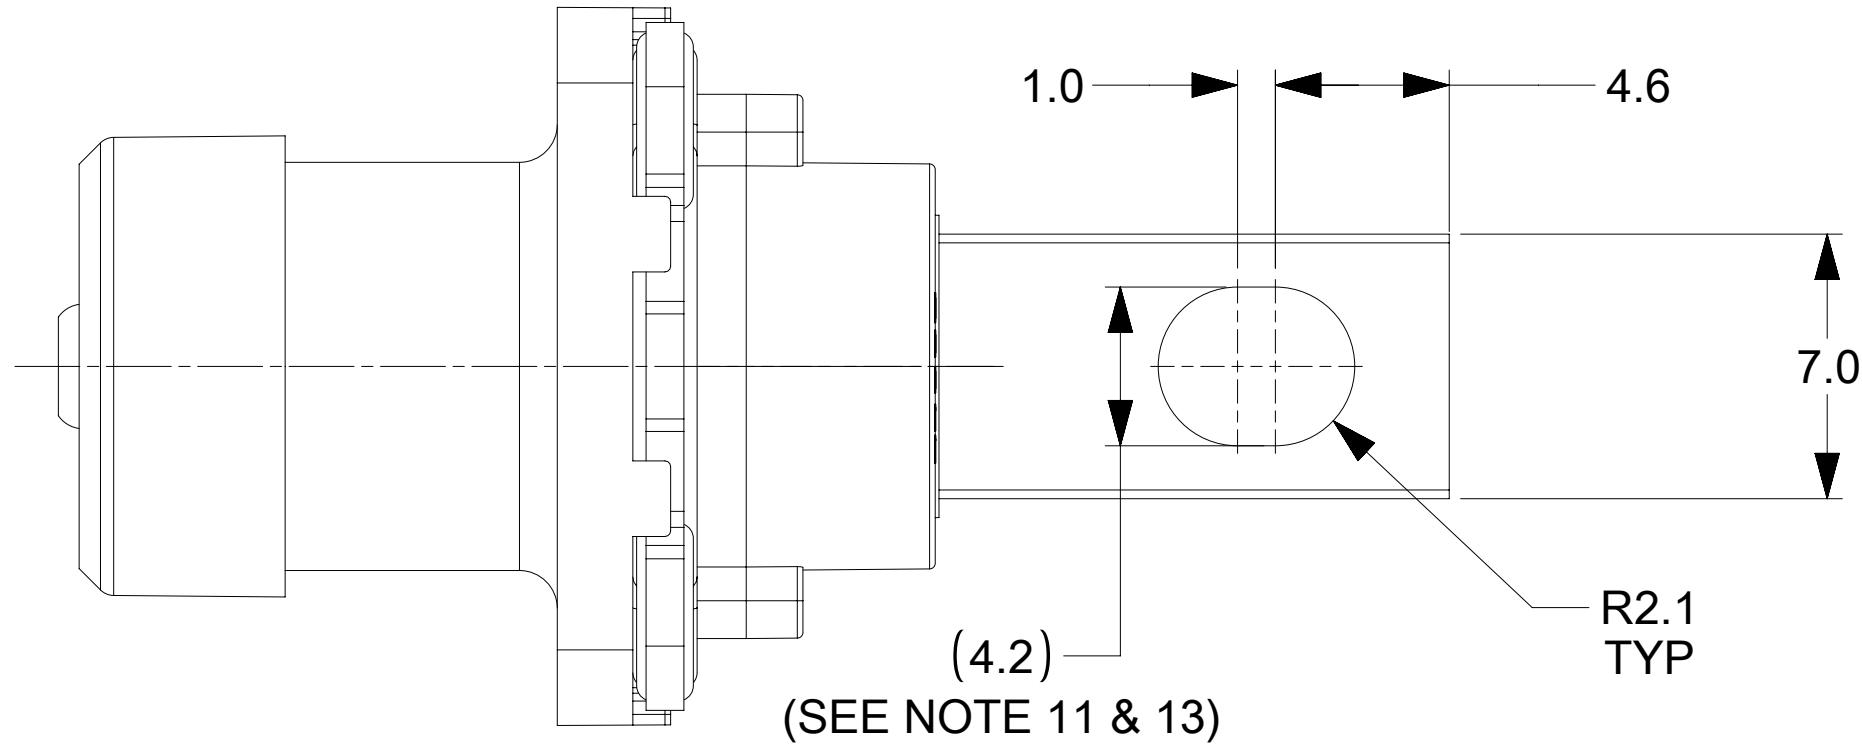



ISOMETRIC VIEW

NOTES:

- MATERIAL P/N:
 - RESIN: 30% GLASS-FILLED PBT, UL94 V-0, LOW HALOGEN.
 - METAL: HIGH COPPER ALLOY.
 - GASKET SEAL: SILICON BASED RUBBER.
- PLATING: SILVER WITH TARNISH INHIBITOR.
- COMPONENTS WITH SILVER PLATING ARE FINISHED WITH ANTI-TARNISH TREATMENT BUT MAY TARNISH OVER-TIME.
- MATES WITH SERIES NO: 223985.
- PRODUCT SPECIFICATION: 2239850000-PS.
- PACKAGING SPEC: 2239870000-PK.
- APPLICATION SPEC: 2239850000-AS.
- RELATION BETWEEN PANEL AND BUSBAR SHOULD BE FLEXIBLE TO TERMINATE, THE VALUE SHOWN SHOULD BE USED AS REFERENCE ONLY.
- PART TO BE MOUNTED TO BUABAR USING CONDUCTIVE M4 SCREWS & NUT, AND CONDUCTIVE M4 BELLEVILLE WASHER OF 0.70 MM MAX OVERALL HEIGHT INCLUDING THICKNESS FOR OPTIMAL PERFORMANCE.
- PART TO BE MOUNTED TO PANEL WITH A THICKNESS OF 1.0~4.0MM WITH M3 SCREWS, BELLEVILLE WASHER, AND NUTS.
- MOLEX DOES NOT SUPPLY SCREWS, NUTS AND WASHERS.
- ASSEMBLY MEETS ROHS REQUIREMENT.
- THIS PART CONFORMS TO CLASS B REQUIREMENT OF COSMETIC SPEC PS-45499-002.
- THE DATE CODE SHOULD BE VISIBLE ON THE BACK OF THE CONNECTOR AT THE APPROXIMATE LOCATION INDICATED.
- THE KEEP-OUT ZONE IS DESIGNED TO PROVIDE ADEQUATE SPACE FOR THE FINGER TO EASILY ACTUATE THE SIDE LOCK. THE OPTIMAL VALUE FOR THIS ZONE IS SUBJECTIVE AND MAY VARY FOR EACH INDIVIDUAL; THEREFORE, IT SHOULD BE DETERMINED BASED ON THE CUSTOMER'S PREFERENCES.

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																	
FA = 0 FE = 0 FP = 0 DIVISIONAL SYMBOLS	DIMENSION UNITS		SCALE		CURRENT REV DESC: FIRST RELEASE.					molex SIDEWIZE 3.40MM BULKHEAD BUSBAR TERMINATION								
	mm		5:1		EC NO: 820485 DRWN: SCS022025/02/17 CHK'D: HTHYAGARAJ2025/05/05 APPR: HTHYAGARAJ2025/05/05 INITIAL REVISION: DRWN: SUHITM2023/10/12 APPR: HTHYAGARAJ2025/05/05													
	GENERAL TOLERANCES (UNLESS SPECIFIED)																	
	ANGULAR TOL ± 1.0 °																	
	4 PLACES		±							PRODUCT CUSTOMER DRAWING								
	3 PLACES		±							DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION		
	2 PLACES		± 0.25							2239880000		PSD		000		A		
	1 PLACE		± 0.35							MATERIAL NUMBER		CUSTOMER		SHEET NUMBER				
	0 PLACES		±			THIRD ANGLE PROJECTION		DRAWING		SERIES		SEE TABLE		GENERAL MARKET		1 OF 2		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							D-SIZE		223988									

DOCUMENT STATUS	P1	RELEASE DATE	2025/05/05	07:15:14
-----------------	----	--------------	------------	----------

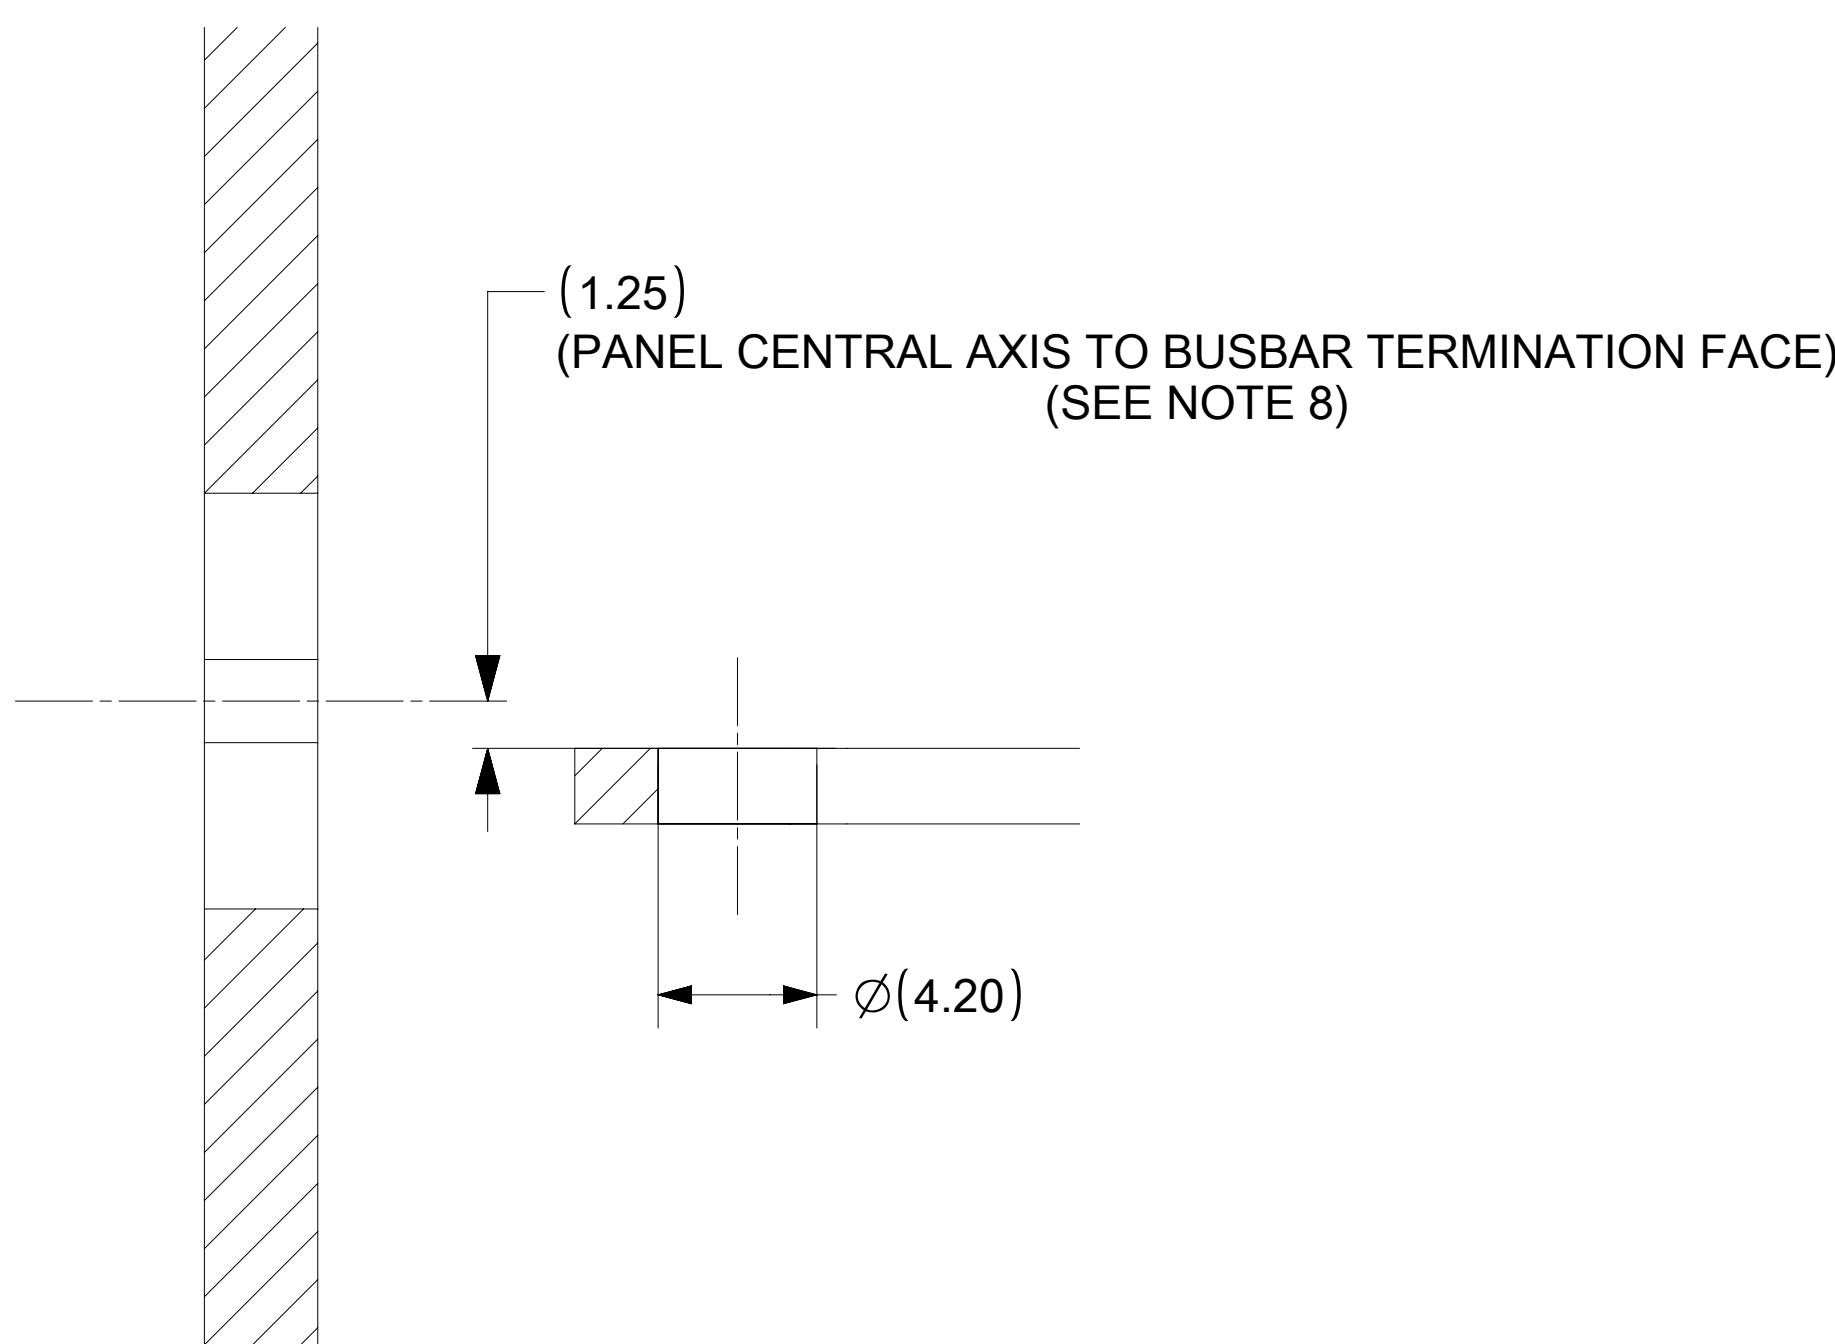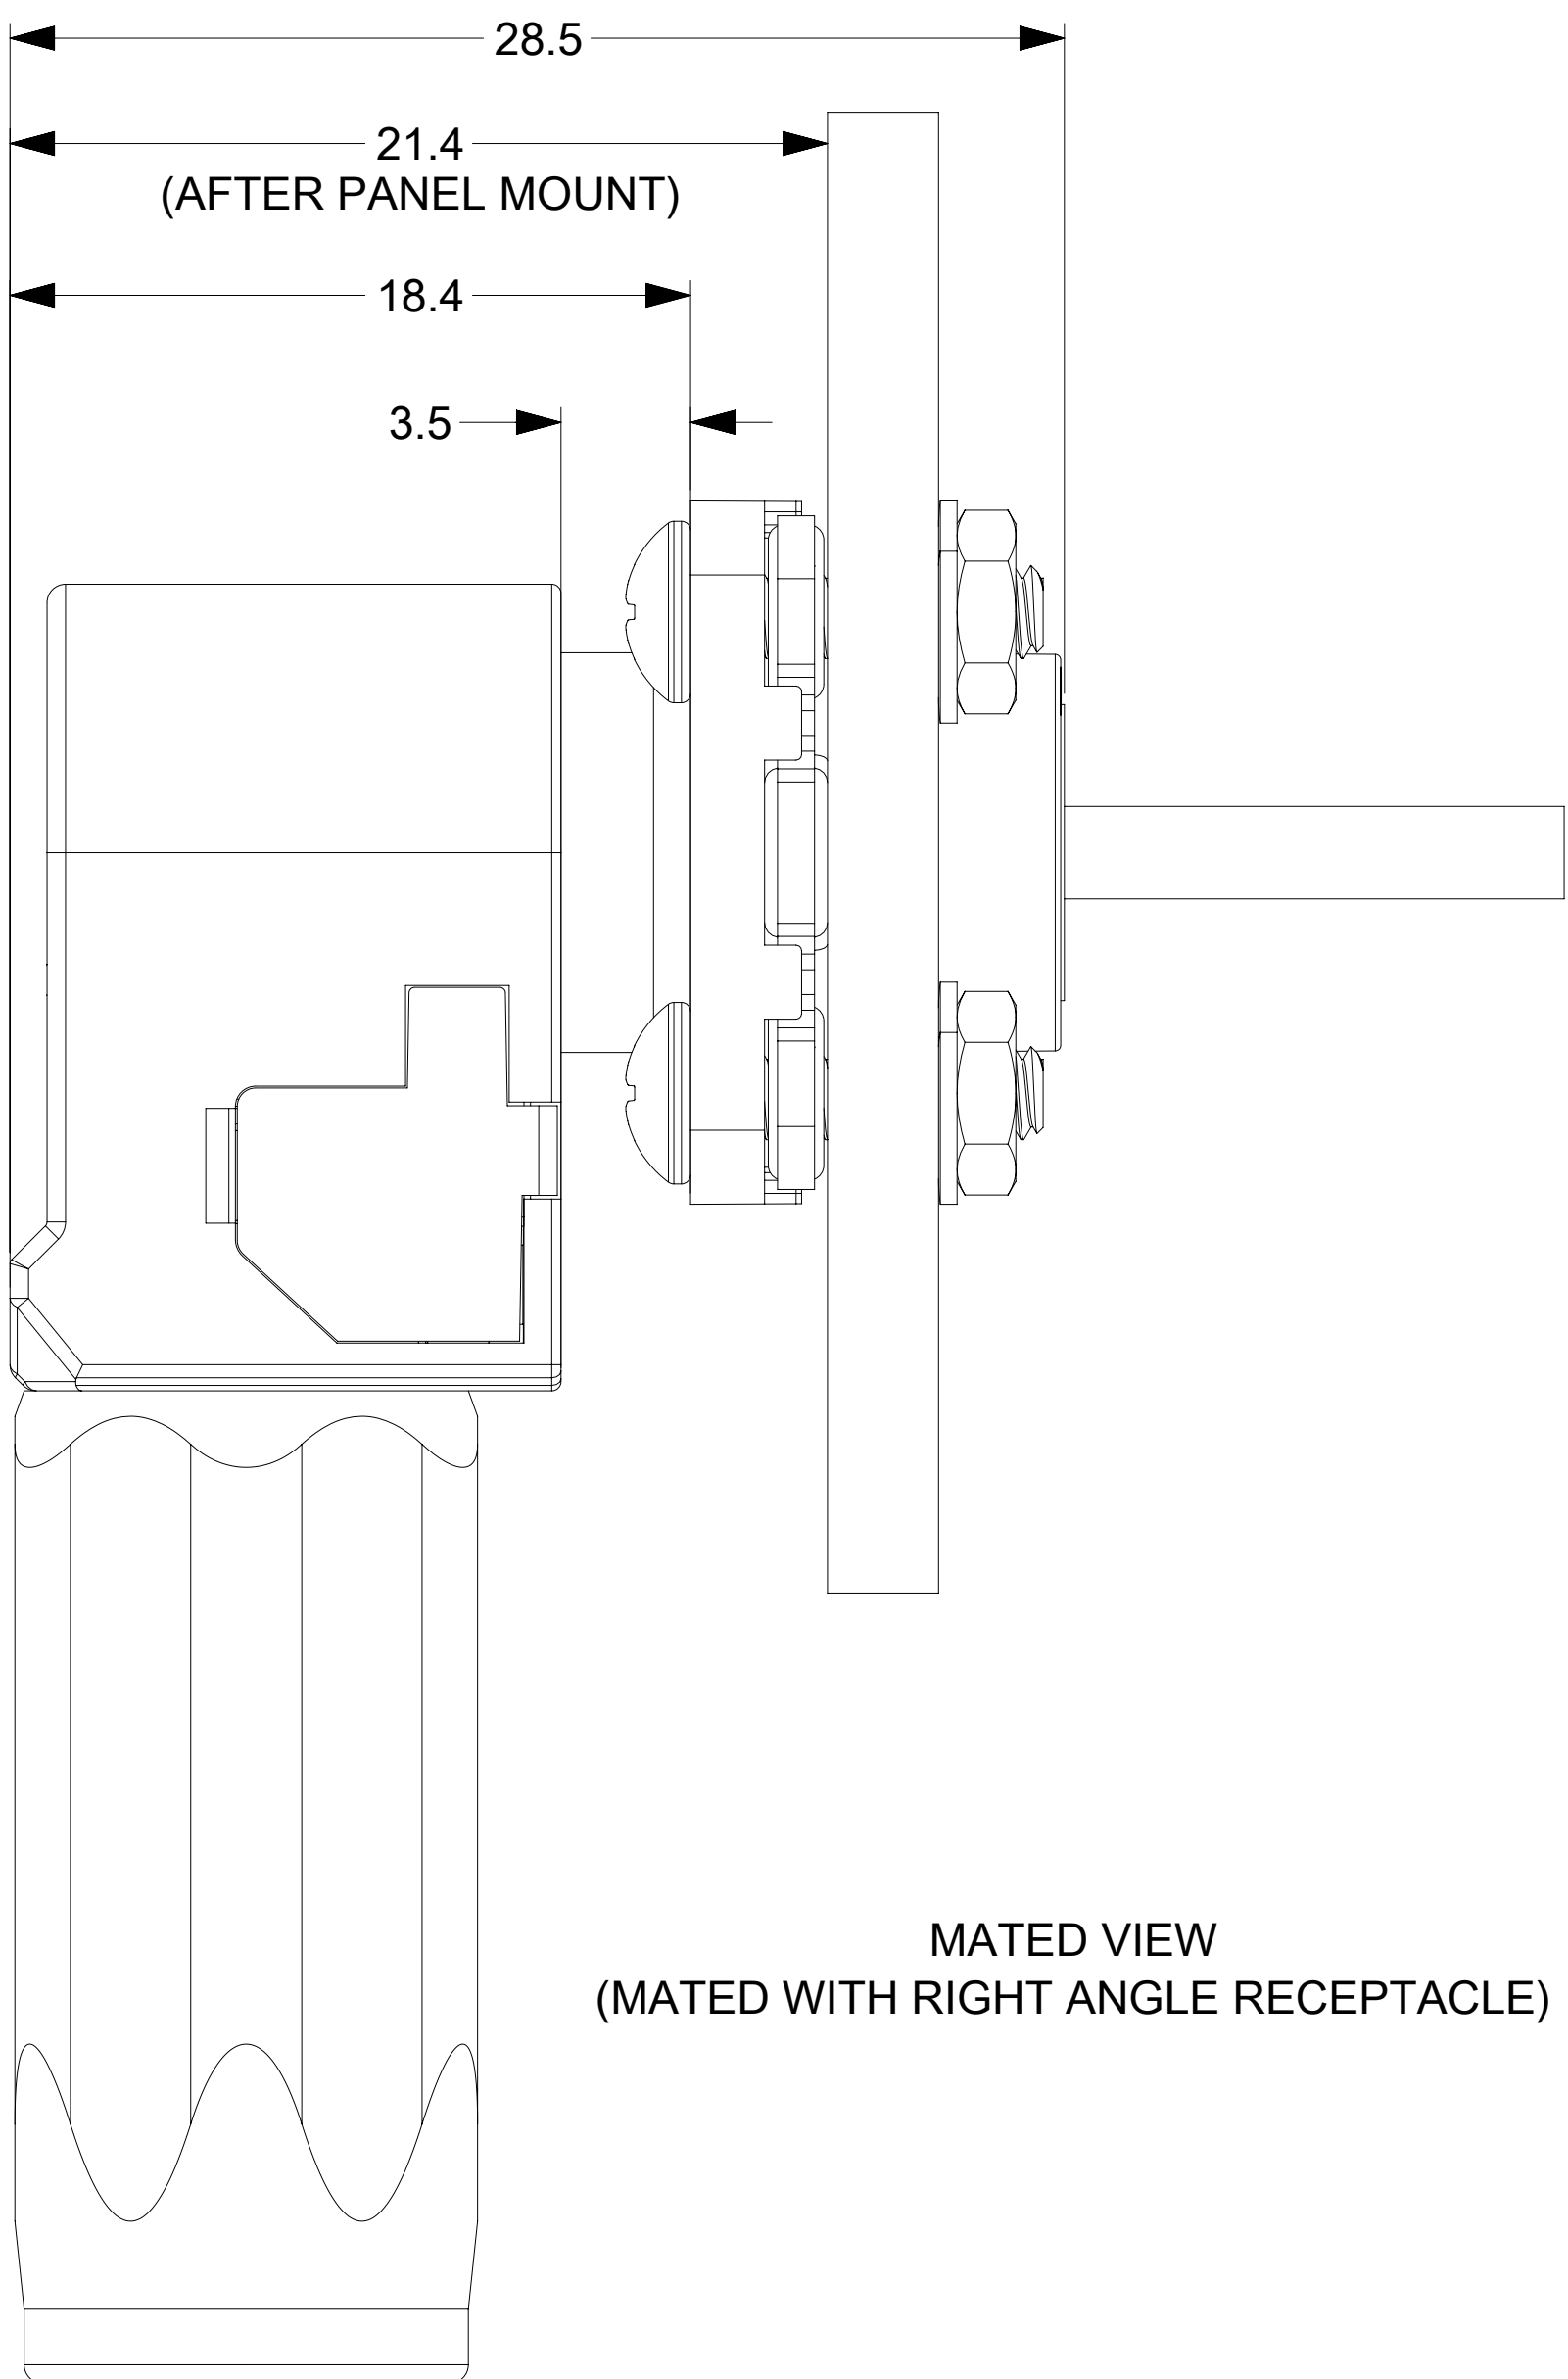

FUNCTIONAL SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							
 = 0	DIMENSION UNITS	SCALE	CURRENT REV DESC: FIRST RELEASE.						
 = 0	mm	5:1							
 = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)								
 = 0	ANGULAR TOL ± 1.0 °								
DIVISIONAL SYMBOLS	4 PLACES	±							
	3 PLACES	±							
	2 PLACES	± 0.25							
	1 PLACE	± 0.35							
	0 PLACES	±							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	PRODUCT CUSTOMER DRAWING				
				D-SIZE	223988	DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
						2239880000	PSD	000	A
						MATERIAL NUMBER	CUSTOMER		SHEET NUMBER
						SEE TABLE	GENERAL MARKET		2 OF 2

DOCUMENT STATUS	P1	RELEASE DATE	2025/05/05	07:15:14
-----------------	----	--------------	------------	----------