

MATERIALS AND FINISHES:





MMCX-PoC PLUG STR
SEE SD-73414-122

SMA JACK STR
SEE SD-73251-772

SHRINK TUBE: VERSAFIT OR EQUIVALENT
COLOR BLACK

CABLE: RG-174LL

NOTE: MMCX-PoC INTERFACE IS
BACKWARDS COMPATIBLE TO
MMCX INTERFACE DEFINED BY
IEC-61169-52

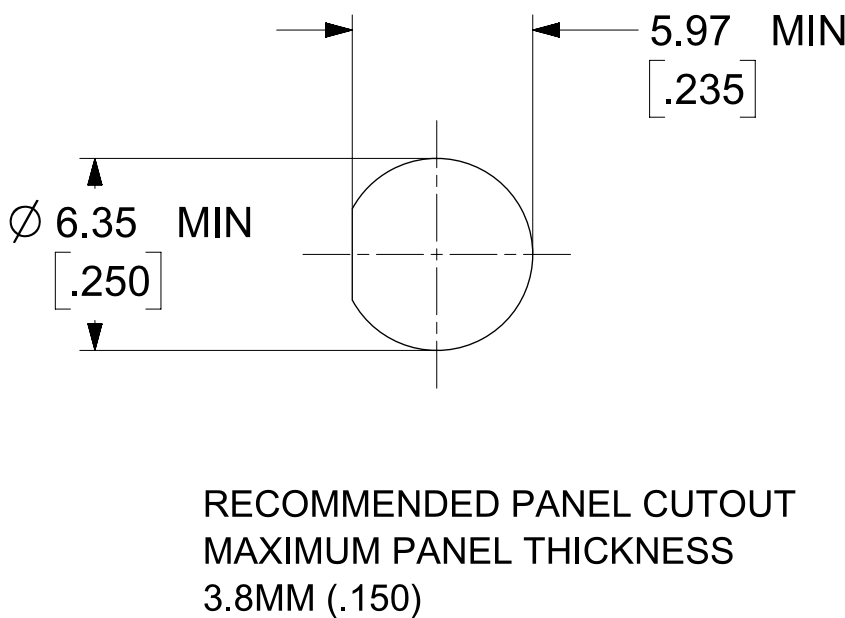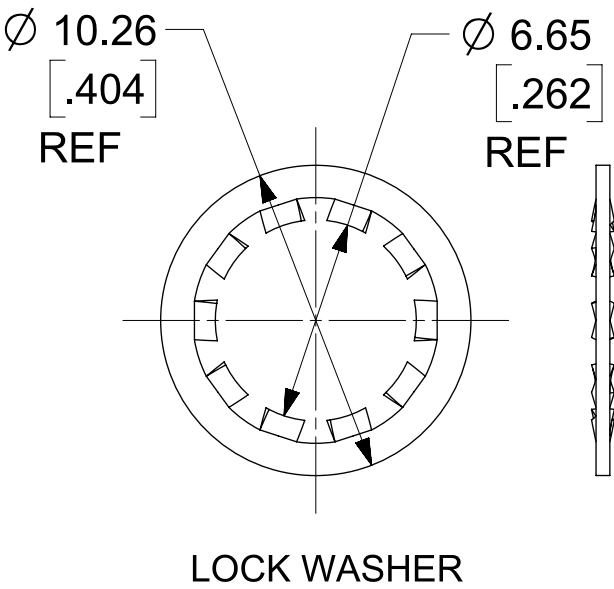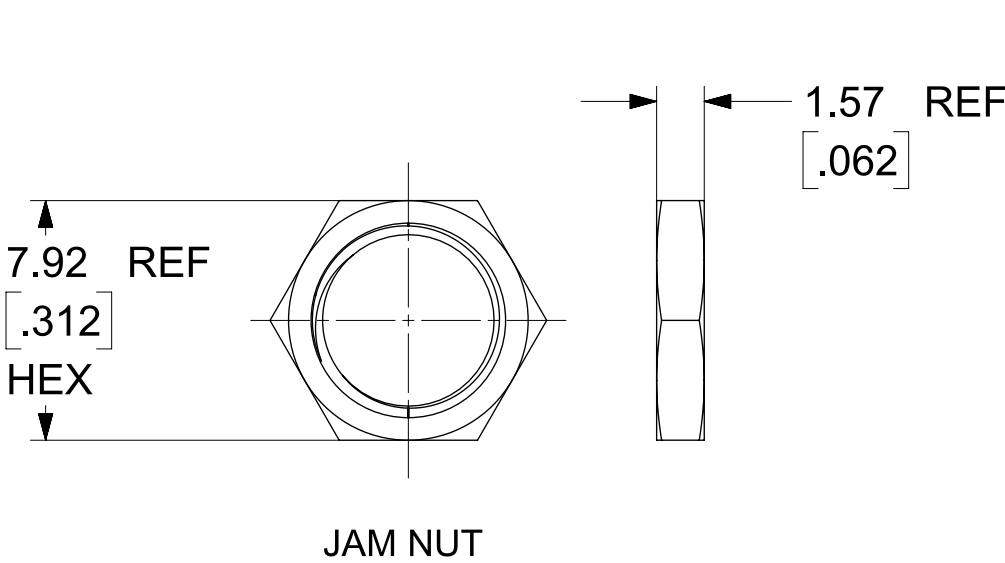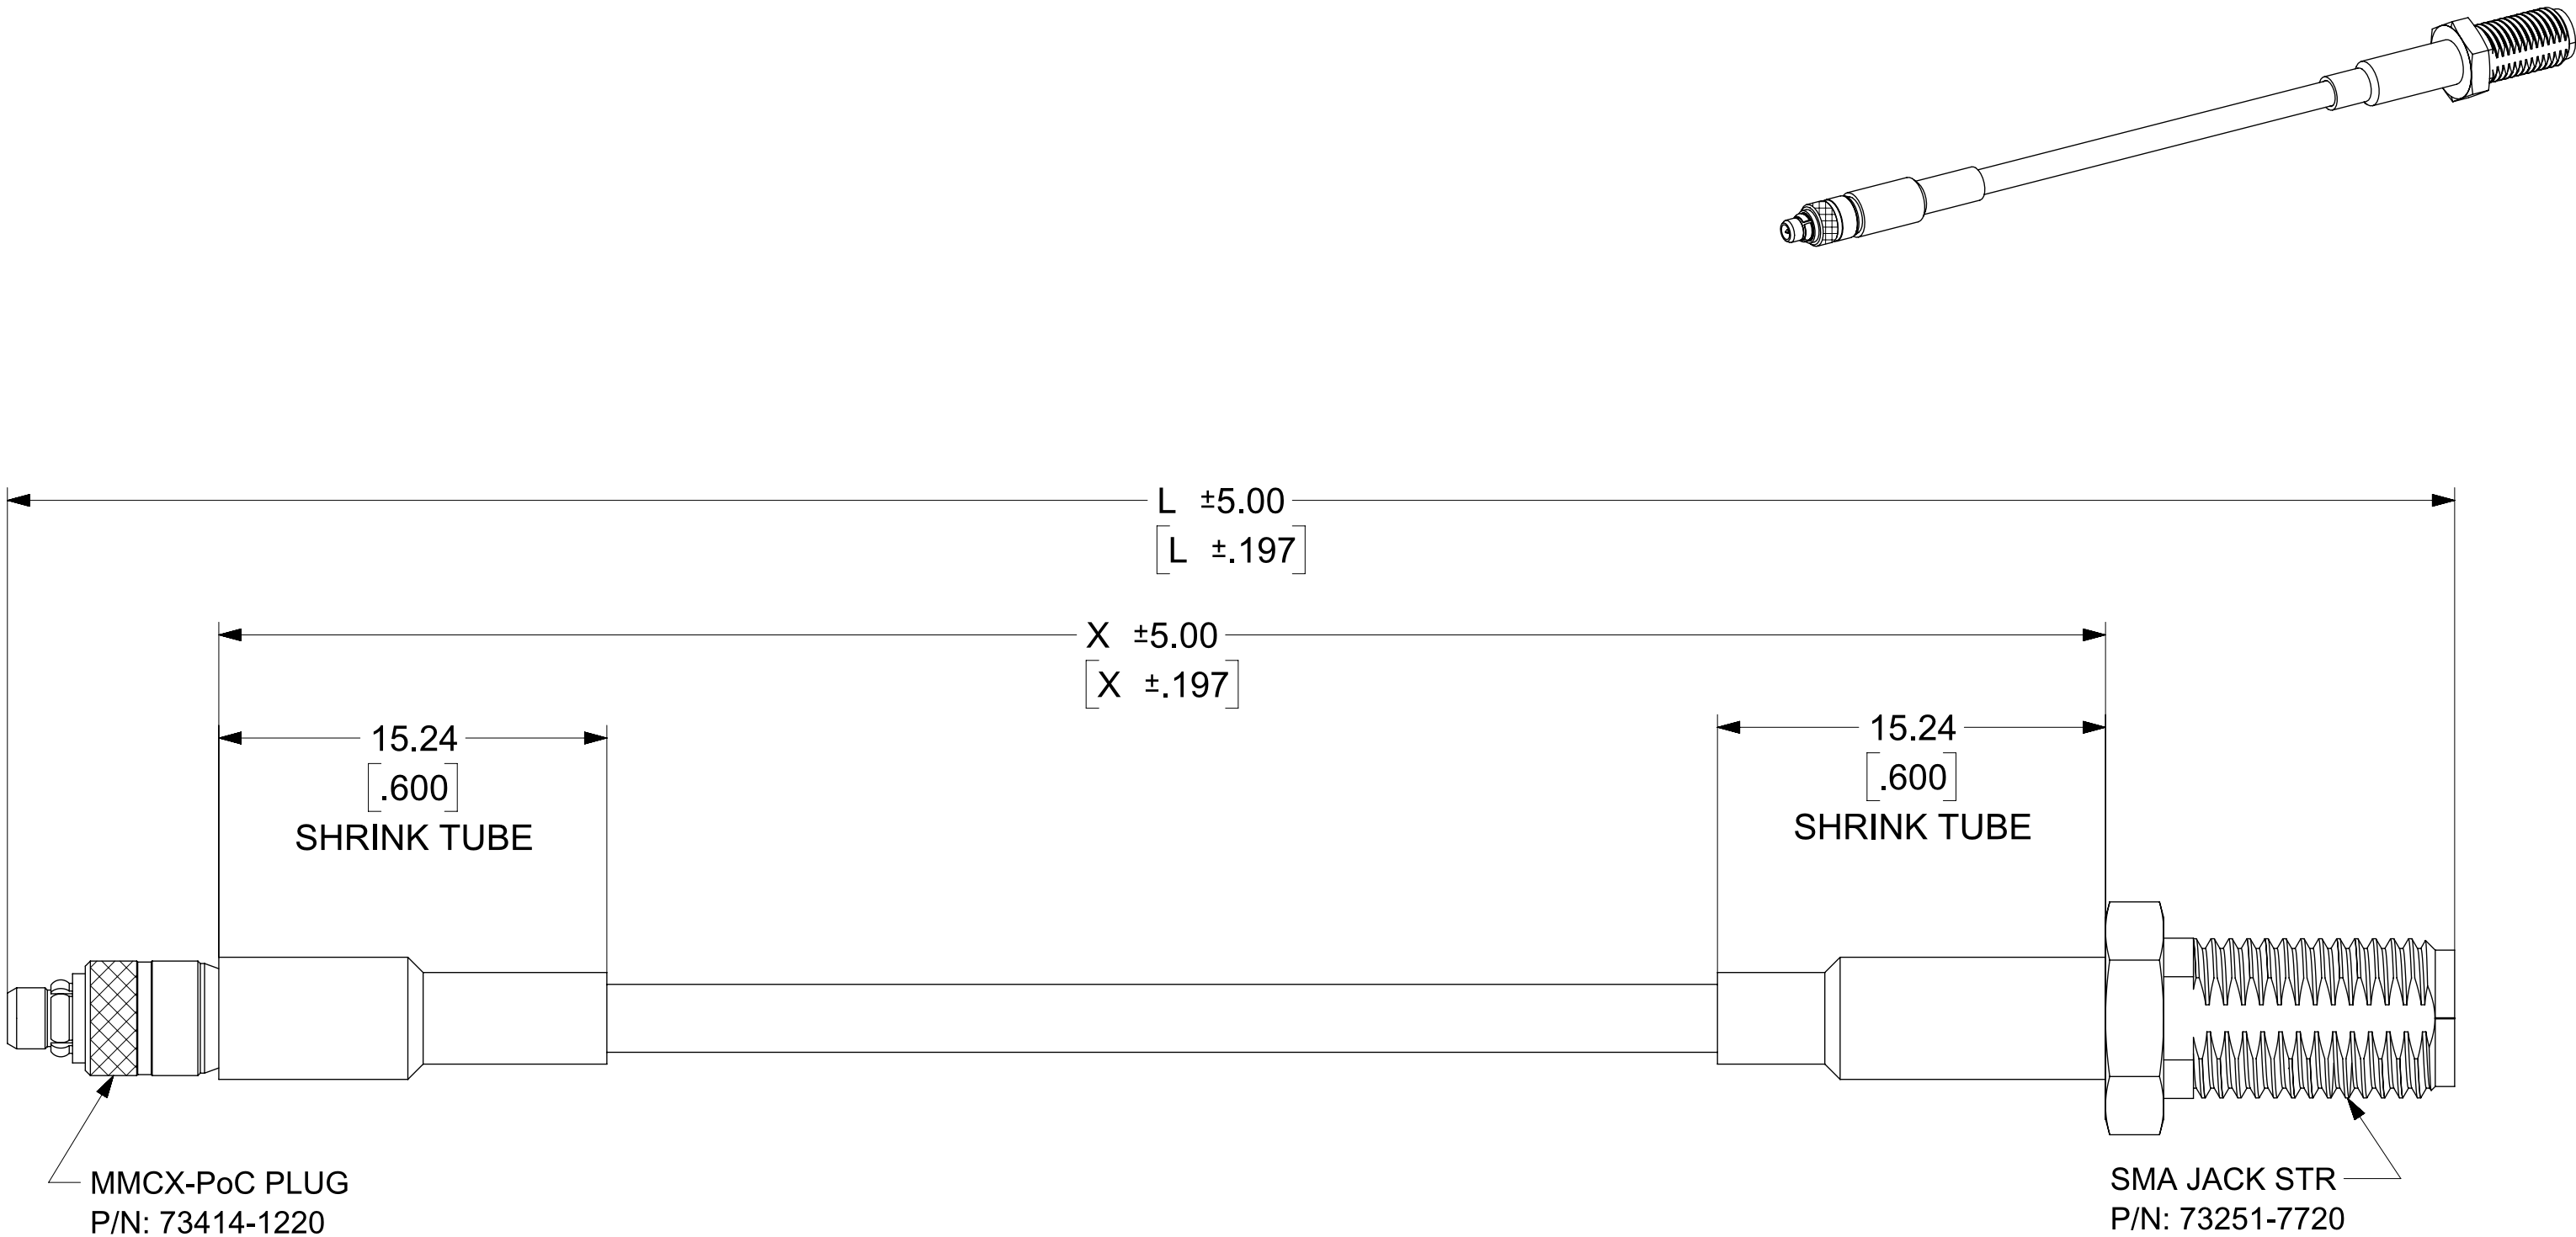

73230-2011	200.00 / 7.874	177.98 / 7.007
73230-2010	150.00 / 5.906	127.98 / 5.039
PART NO	DIM L	DIM X
	(MM / INCH)	(MM / INCH)

MIL-STD-348A, FIG. 310-2	SMA INTERFACE
IEC-61169-52	MMCX INTERFANCE
SPECIFICATION	DESCRIPTION

FUNCTIONAL SYMBOLS F A = 0 F C = 0

F

P

DIVISIONAL SYMBOLS

molex

CA, SMA JACK STR TO MMCX-PoC PLUG STR
50 OHMS,RG174LL CABLE,EWR-16361-A,
CA-SMA-J/MMCX-PoC

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER

732302010

DOC TYPE


PSD

DOC PART

000

REVISION


A1

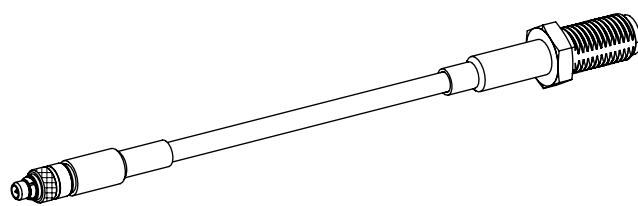


PART NO.: 73230-2010
PART NO.: 73230-2011



10 SET PER POLYBAG
P/N: 89707-0174

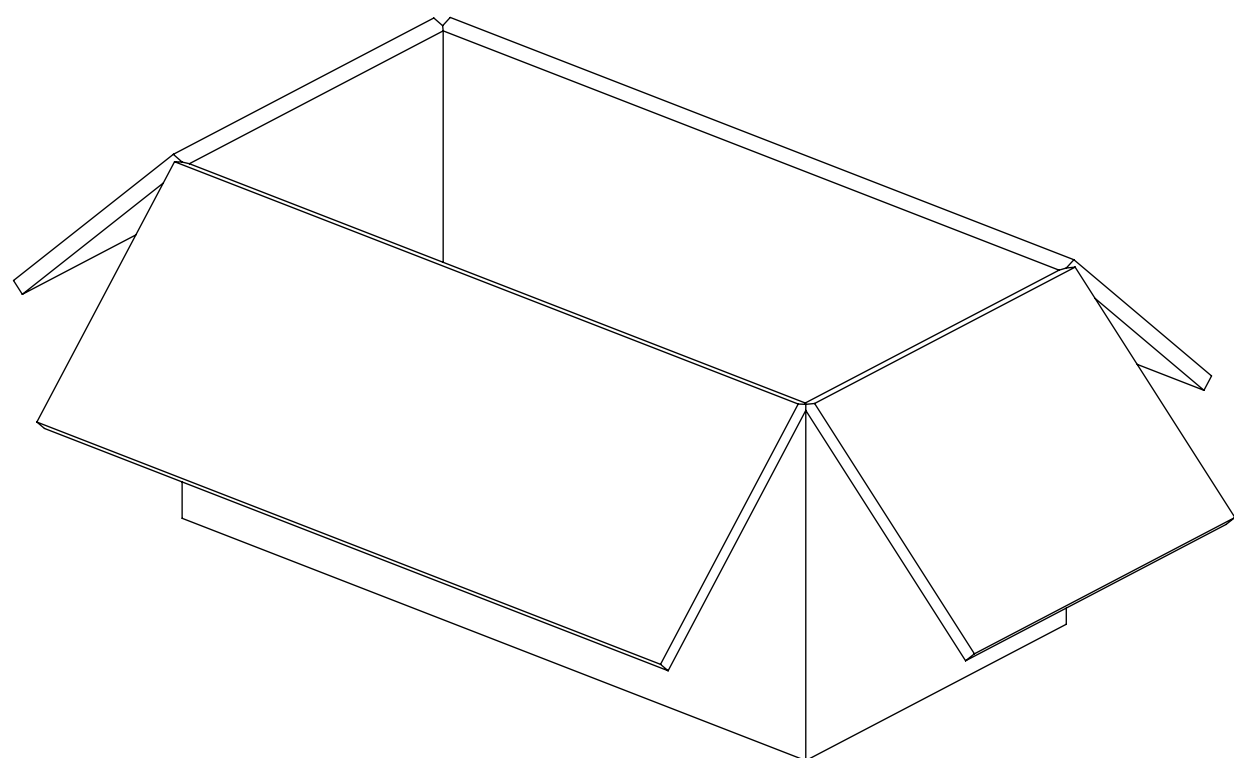

100 SET PER INNER CARTON BOX
P/N: 96707-0001

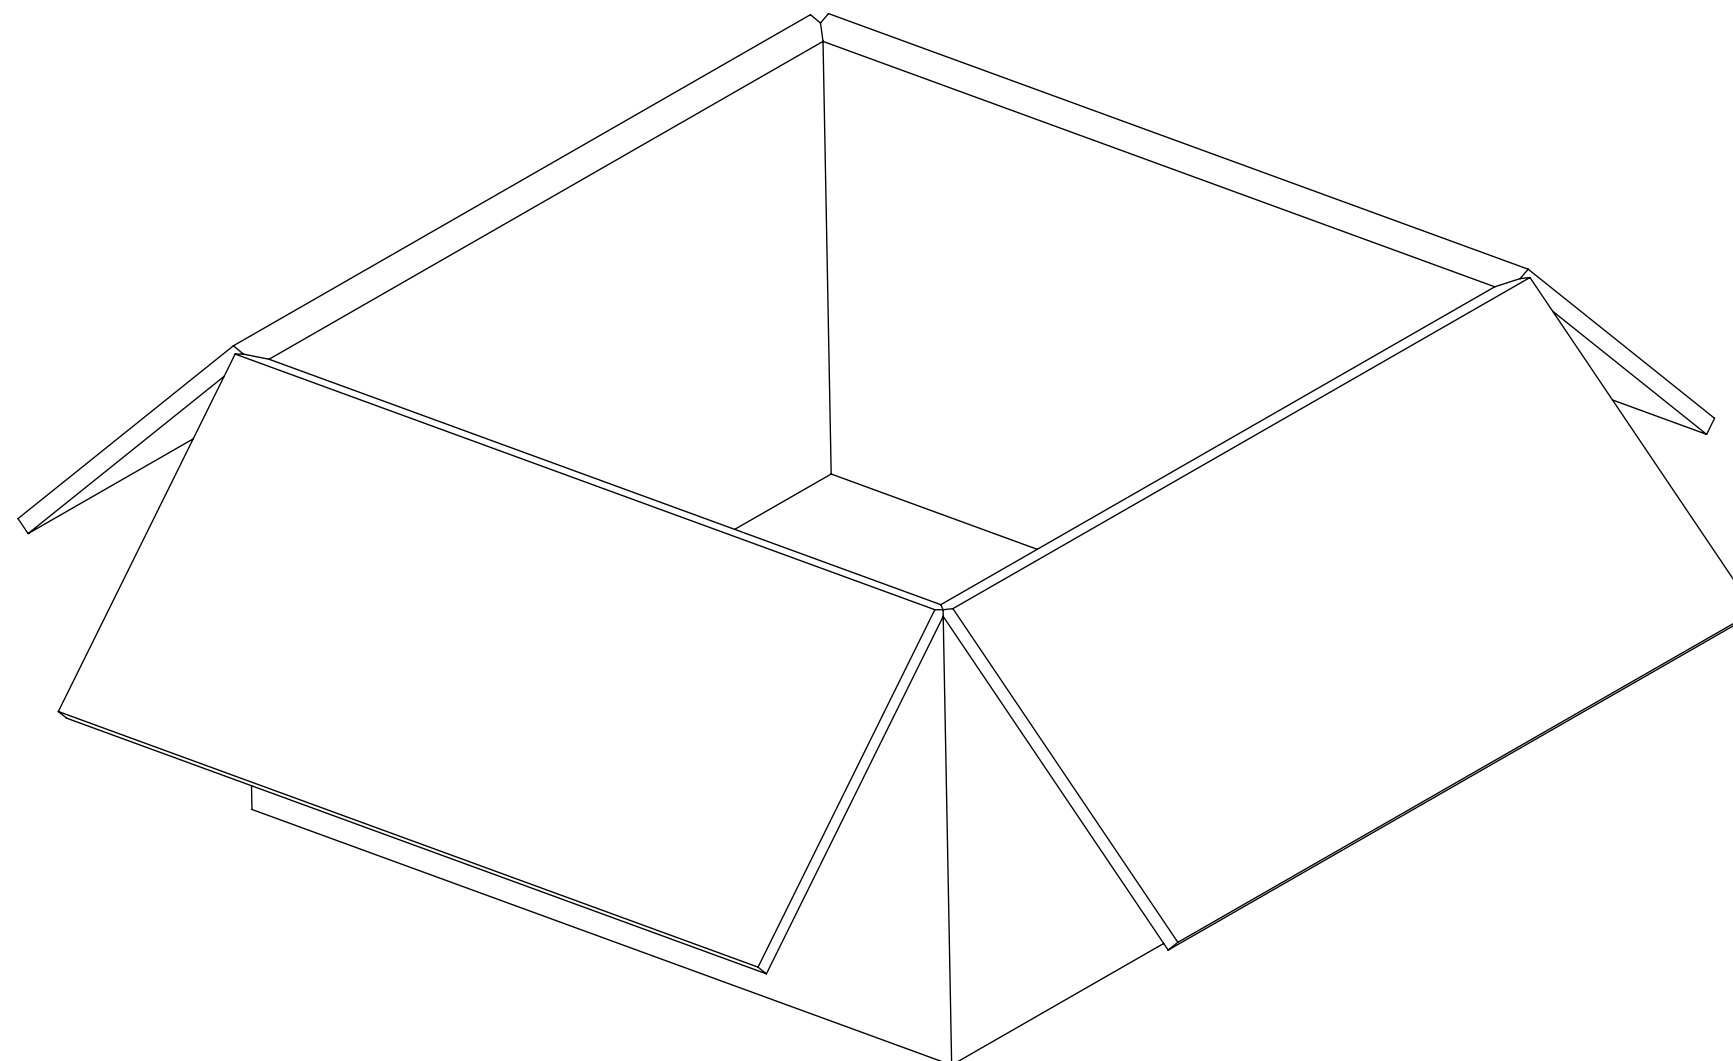

200 SET PER OUTER CARTON BOX
P/N: 96708-0005

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
	DIMENSION UNITS	SCALE	CURRENT REV DESC: EWR-16361-D: UPDATE TITLE NAME TO MMCX-PoC PLUG STR FROM MMCX-PoC PLUG R/A				molex			
F_A = 0	MM/INCH	NTS								
F_E = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)									
F_D = 0	ANGULAR TOL ± 0.5°									
DIVISIONAL SYMBOLS	4 PLACES	±	STATUS: Production DRWN: JasonYS Su 2025-01-23 CHK'D: Darry Cheng 2025-02-04 APPR: Darry Cheng 2025-02-04				PRODUCT CUSTOMER DRAWING			
	3 PLACES	±								
	2 PLACES	±								
	1 PLACE	±								
	0 PLACES	±								
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	DOCUMENT NUMBER	DWG TYPE	DWG PART	REVISION	
			C-SIZE	73230	732302010	PSD	000	A1		
					MATERIAL NUMBER	CUSTOMER		SHEET NUMBER		
								2 OF 2		