


RECOMMENDED P.C. BOARD HOLE-LAYOUT

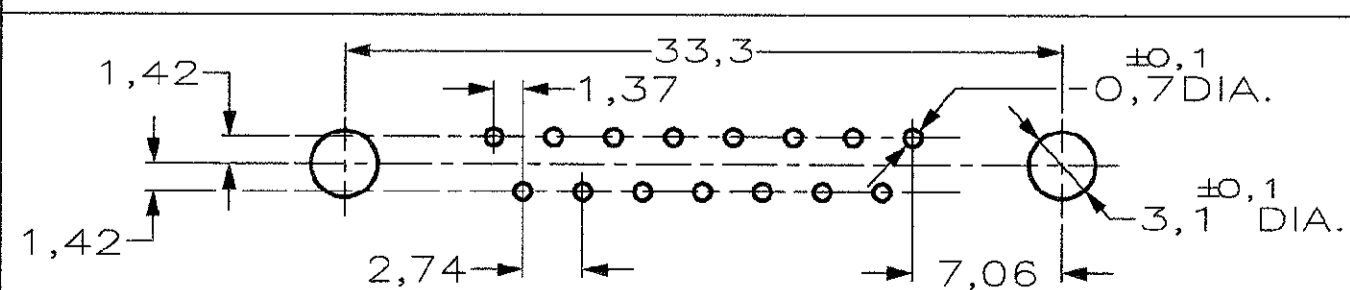

DO NOT SCALE

METRIC

THIRD ANGLE PROJECTION

DIMENSIONS IN mm

ITEM NR.	DESCRIPTION OF ACCESSORY	1	2	3	4	5	6	7	8	9
5	BUSHING WITH THROUGH HOLE 3,1 DIA.									
5	BUSHING WITH THREAD 4-40 UNC									
5	BUSHING WITH THREAD M3									
4	FEMALE SCREWLOCK WITH THREAD 4-40 UNC									
4	FEMALE SCREWLOCK WITH THREAD M3									
6	BOARDLOCK									

HOW TO ORDER:

15 POS. -----> Z-338310-Y

PREFIX FOR ACCESSORIES

BASIC PARTNR.

SUFFIX FOR PLATING

PLATING SUFFIX "Y"

GOLD OVER NICKEL AS PER PERFORMANCE LEVEL 2 (DIN 41652)  
SOLDERPART :2,5µm BRIGHT SnPb. } -Y = -2

- ① GROOVE INDICATES VERSION WITH 4-40 UNC INNER THREAD; WITHOUT GROOVE INDICATES VERSION WITH M3 INNER THREAD.
- ② CAVITY IDENTIFICATION AT FRONT SIDE ONLY.
- ③ PARTNUMBER AND DATE CODE.
- 4 WHEN BOARDLOCKS ARE USED, CONNECTOR CAN BE USED FOR PCB THICKNESS OF 1,6 mm ONLY.
- 5 SHELL HAS 2x4 GROUNDING SPRINGS; PITCH IS 3,6 mm

ITEM NRS./MATERIAL :

- ① SHELL = BRIGHT TINPLATED STEEL
- ② HOUSING = GLASSFILLED POLYESTER, COLOR : BLACK
- ③ CONTACTS = PHOSPHORBRONZE (PLATING : SEE TABLE ABOVE)
- ④ FEMALE SCREWLOCK = TINPLATED STEEL (INNER THREAD 4-40 UNC OR M3)
- ⑤ BUSHING = TINPLATED STEEL (INNER THREAD 4-40 UNC OR M3 OR 3,1 DIA. THROUGH HOLE)
- ⑥ BOARDLOCK = TINPLATED PHOSPHORBRONZE
- ⑦ STAND-OFF = ULTRAMID VO COLOR : BLACK

-				CUSTOMER DRAWING FOR REFERENCE ONLY WILL NOT BE UPDATED			
-				© COPYRIGHT 19- BY AMP-HOLLAND B.V. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING. THIS DRAWING IS UNPUBLISHED RELEASED FOR PUBLICATION			
D	EH-1417-99	P.W.	W.C.	19-02-00			
C	EH-0033-99	D.K.	W.S.	29 JAN 99			
B	EH-1385-98	W.S.	W.S.	04-09-98			
A	EH-0029-98	JvL	C.S.	15-01-98			
0	EH-0694-97	JvL	C.S.	03-07-97			
LTR.	REVISION RECORD	DR.	CHK.	DATE			
DR.:	J.v.LIEMPT	CHK.:	C.SOUZA	APP.:	W.SOOMERS	DWG.No.	C-338310
DATE:	03-07-97	DATE:	09-09-97	DATE:	09-09-97	REV.LTR.	D
						SHEET	1 OF 1
							A2