

	PART NO.		REVISIONS								
	2261(5561)S-04T-SM1	ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE	
		-	А	RELEASED	Shalini	04/8/08	Suresh	04/8/08	G. C	18/8/08	

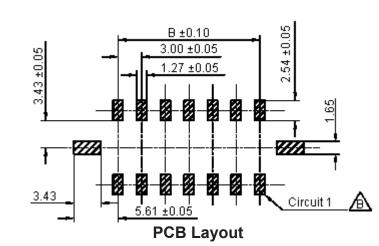



Dimensions : Millimetres

Specifications:

Current rating Voltage rating Maximum contact resistance Minimum insulation resistance Withstanding voltage Operating temperature **Materials:** Insulator Insulator colour Contact Finish

- : 5.0A ac/dc.
- : 250V ac/dc.
- : 10mΩ.
- : 1000MΩ.
- : 1500V ac/minute.
- : -25°C to +105°C.


: High temperature plastic (nylon 46).

- : Black.
- : Copper alloy.
- : Tin plated.

Specification Table

Number of Positions	А	В	Part Number			
4	9.7	3.0	2261(5561)S-04T-SM1			
Dimensions : Millimetres						

Part Number Explanation: <u>2261(5561) S - 04 T -</u>

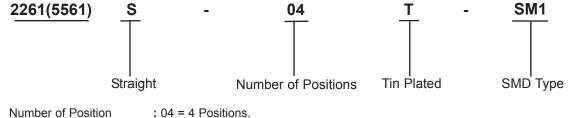

http://www.farnell.com

http://www.newark.com

http://www.cpc.co.uk

believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the prod- ucts for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or or	TOLERANCES:	DRAWN BY:	DATE:	DRAWING TITLE:			
	UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	Shalini	04/08/08	Header - Vertical, SMT, 4 Way			
		CHECKED BY:	DATE:	SIZE DWG NO.		ELECTRONIC FILE	REV A
		Suresh	04/08/08	Δ	M10001567	1578606-1578616_ 5_DWG	
		APPROVED BY:	DATE:				
		G.Cook	18/08/08	SCALE: NTS	U.O.M.: mm	SHEET: 1 OF	: 1