

4

3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 24AUG, 2005.  
 © COPYRIGHT 2005 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
	A	FIRST ISSUE		24AUG05	KR	FWK	

Front view of the terminal showing dimensions: B (width of the top section), D (width of the base), E (height of the base), and L (total height).

Side view of the terminal showing dimensions: t (thickness of the top section) and t1 (thickness of the base).

NOTES:

- FOR TECHNICAL DATA REFER TO YOUR LOCAL TYCO ELECTRONICS SALES OFFICE.
- ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED.
- FOR PACKAGING DETAILS SEE SHEET 2.
- MATERIAL: BODY - BRASS  
SLEEVE - PVC (K65), 94V-0
- APPLICATION SPEC 114-13196

STOCK NUMBER	PACKING LABEL DESCRIPTION LINE 3	PACKING LABEL DESCRIPTION LINE 2	PACKING LABEL DESCRIPTION LINE 1	INNER CARTON QTY	QTY	B (±0.30)	L (±1.50)	D (±0.20)	E (±0.50)	t (±0.10)	t1 (±0.20)	WIRE SIZE (mmsq) & (AWG)	SIZE (mm)	DESCRIPTION	PART No
2-1838226-0 1-1838226-0	1.5mmsq - 2.5mmsq 16-14(AWG)	6.4x0.8mm STANDARD ENTRY	BLUE MALE PUSH-ON TERMINAL (INSULATED)	3000 3500	1000 100	6.35	22.50	4.90	10.50	0.40	0.80	1.5mmsq - 2.5mmsq 16-14(AWG)	6.4 X 0.8	BLUE MALE PUSH-ON TERMINAL (INSULATED)	2-1838226-0 1-1838226-0


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K.Raghuandan 24AUG05	<b>tyco</b> Electronics		Tyco Electronics Corporation Bideford, UK, EX39 4HE	
DIMENSIONS: mm		CHK S. Parlow 03/04/07	NAME EURO-CRIMP INSULATED BLUE MALE PUSH-ON TERMINAL 1.5mmsq - 2.5mmsq / 16-14 AWG RANGE			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD F. Wheeler-King 03/04/07	RESTRICTED TO			
0 PLC ± 0.5		PRODUCT SPEC	SIZE A2			
1 PLC ± 0.2		APPLICATION SPEC	CAGE CODE 00779			
2 PLC ± 0.1		WEIGHT	DRAWING NO C=1838226			
3 PLC ± 0.015		FINISH	SCALE NTS			
4 PLC ± -		FINISH	SHEET 1 OF 2			
ANGLES ± -		FINISH	REV A			
CUSTOMER DRAWING						

AMP 1471-9 REV 31MAR2000

1838226

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 24AUG ,2005.  
 © COPYRIGHT 2005 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
-	-	SEE SHEET 1	-	-	-		

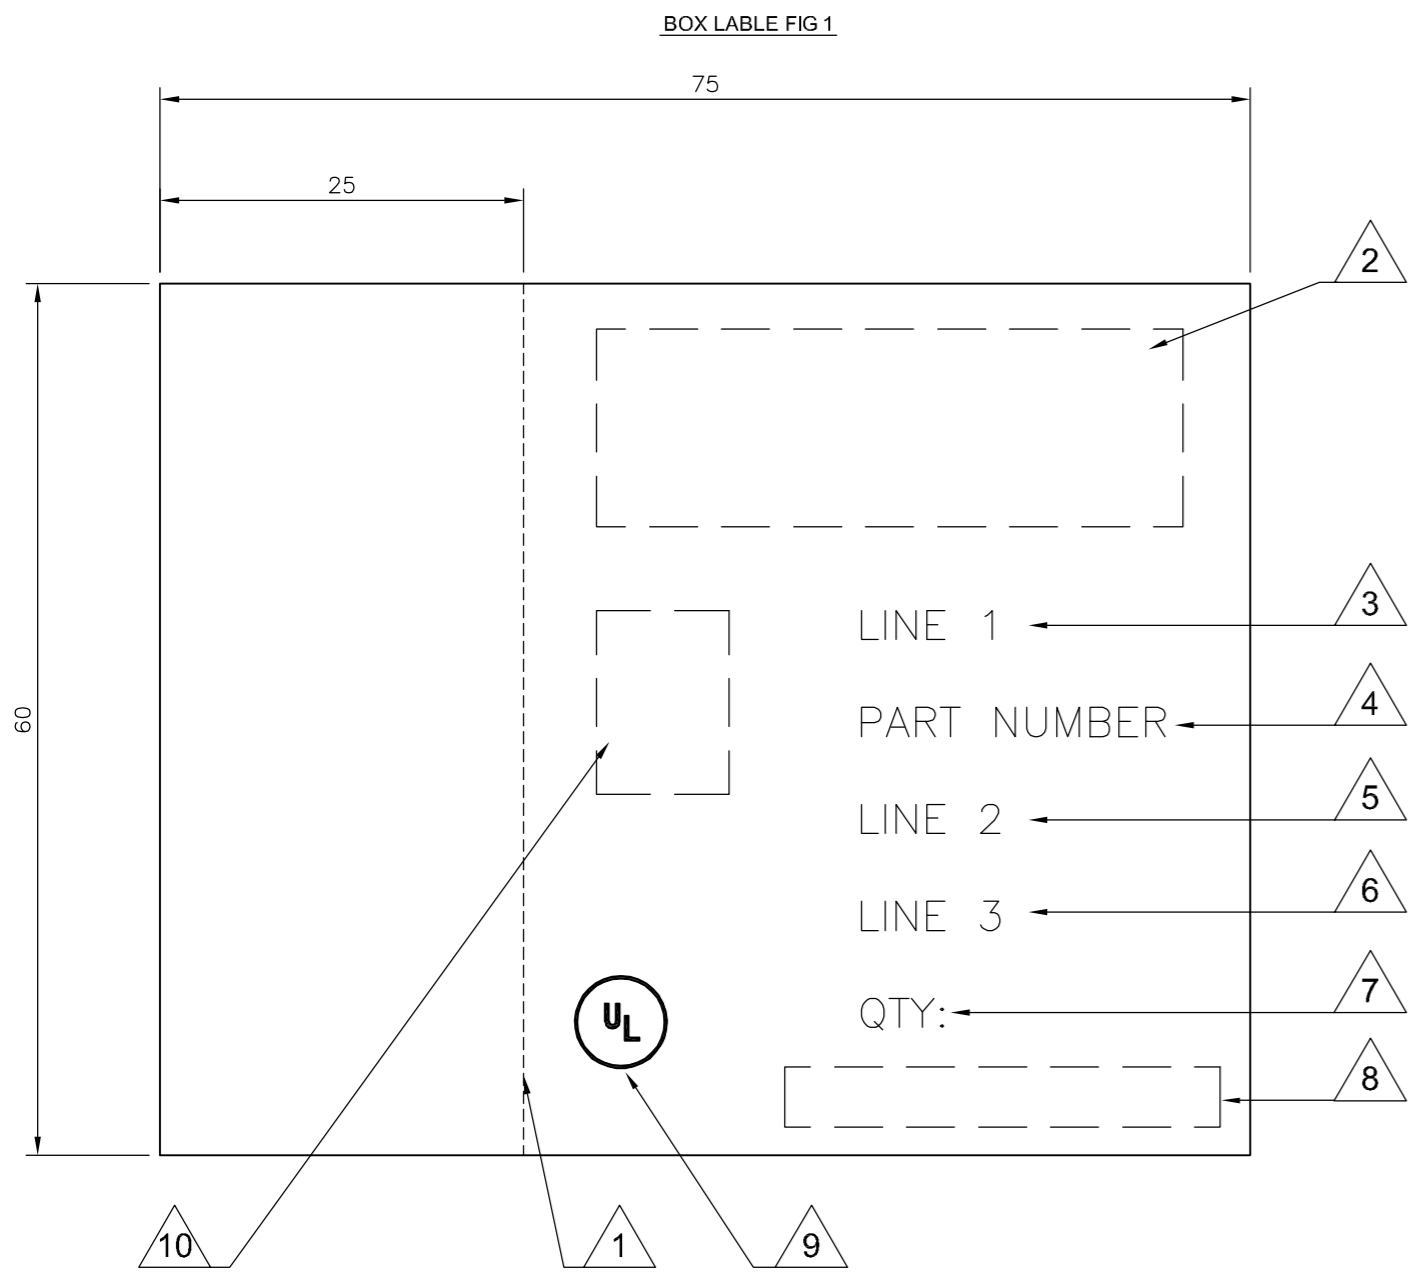

- LABEL NOTES:**
- 1. PERFORATED LINE: DOTTED LINE TO BE ALIGNED WITH OPENING EDGE & FOLDED TO LEFT SIDE OF BOX.
  - 2. LOGO: USE LATEST REVISION OF TYCO COMPANY LOGO.
  - 3. LINE 1: SEE SHEET 1, USE TEXT FROM COLUMN PACKAGING LABEL DESCRIPTION LINE 1.
  - 4. PART NUMBER: FOR 1--0 & 2--0 USE TYCO PART NUMBER.  
1--0 = 1-1838226-0  
2--0 = 2-1838226-0
  - 5. LINE 2: SEE SHEET 1, USE TEXT FROM COLUMN PACKAGING LABEL DESCRIPTION LINE 2.
  - 6. LINE 3: SEE SHEET 1, USE TEXT FROM COLUMN PACKAGING LABEL DESCRIPTION LINE 3.
  - 7. QTY: SEE SHEET 1, USE NUMBER FROM THE COLUMN QTY.
  - 8. EAN BARCODE: USE LATEST TYCO BARCODE SUPPLIED.  
1--0 = TYCO BARCODE  
2--0 = TYCO BARCODE
  - 9. UL: WHERE APPLICABLE USE UL LOGO, SEE SHEET 1.
  - 10. PRODUCT PICTURE: A PRODUCT PICTURE IS REQUIRED.

- BOX NOTES:**
- 1. EURO SLOT: TO BE POSITIONED TO CENTRE ON FRONT COVER.
  - 2. BOX HINGE: FRONT COVER TO BE HINGED ON RIGHT SIDE.
  - 3. SPECIFICATION: COVER TO BE FREE FROM POSSIBLE WARPING & CAPABLE OF BEING RE-SEALED MIN 100 TIMES.
  - 4. LABEL: CORRECT CUSTOMER BOX LABEL TO BE POSITIONED ON THE FRONT COVER WITH THE PERFORATED EDGE ON THE LEFT HAND SIDE.

- PACK SPECIFICATION:**
- 1. CLEAR PLASTIC BOX: PART NUMBER 1--0 TO BE PACKED 100 PARTS PER CLEAR PLASTIC BOX (FIG2) WITH THE CORRECT CUSTOMER LABEL (FIG1), 35 CLEAR PLASTIC BOXES OF THE SAME PART NUMBER ARE TO BE PACKED INTO A SUITABLE INNER CARTON BOX.
  - 2. CLEAR PLASTIC BAG: PART NUMBER 2--0, USE A SUITABLE CLEAR PLASTIC BAG FOR A 1000 PARTS, POSITION AN APPROPRIATE LABEL AS IN FIG1 BUT WITHOUT THE PERFORATED SIDE, CENTRE OF BAG. 3 BAGS ARE THEN TO BE PACKED INTO A SUITABLE INNER CARTON BOX.
  - 3. INNER CARTON LABEL: LABEL AS PER CLEAR PLASTIC BAG NOTE 2 BUT WITH INNER CARTON QTY 3000 TO BE POSITIONED ON THE SIDE OF THE BOX FOR VIEWING WHEN STORED.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K.Raghuandan 24AUG05	<b>tyco</b> Tyco Electronics Corporation	
DIMENSIONS: mm		CHK S. Parlow 03/04/07	Bideford, UK, EX39 4HE	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD F. Wheeler-King 03/04/07	NAME	
0 PLC ± 0.5		PRODUCT SPEC	EURO-CRIMP INSULATED BLUE MALE PUSH-ON TERMINAL	
1 PLC ± 0.2		APPLICATION SPEC	1.5mmsq - 2.5mmsq / 16-14 AWG RANGE	
2 PLC ± 0.1			SIZE	CAGE CODE
3 PLC ± 0.015			A2	00779
4 PLC ± -			SCALE	DRAWING NO
ANGLES ± -		WEIGHT	NTS	C=1838226
FINISH		CUSTOMER DRAWING	SHEET	REV
			2	2
				A

1838226