

Main

| | |
|-------------------------------|--|
| Range of product | Preventa Safety automation |
| Product or component type | Preventa safety module |
| Safety module name | XPSAF |
| Safety module application | For emergency stop, switch and safety light curtain monitoring |
| Function of module | Monitoring of electro-sensitive protection equipment (ESPE) Monitoring of a movable guard Emergency stop monitoring 1-channel wiring Emergency stop with 2 NC contacts monitoring 2-channel wiring Multiple emergency stop monitoring 2-channel wiring |
| Safety level | Can reach SILCL 3 conforming to EN/IEC 62061 Can reach PL e/category 4 conforming to EN/ISO 13849-1 |
| Safety reliability data | PFHd = 5.61E-9 1/h conforming to EN/IEC 62061 MTTFd = 172.1 years conforming to EN/ISO 13849-1 DC > 99 % conforming to EN/ISO 13849-1 |
| Type of start | Unmonitored |
| Connections - terminals | Captive screw clamp terminals, removable terminal block, clamping capacity: 2 x 0.5...2 x 1.5 mm ² flexible cable with cable end, with double bezel Captive screw clamp terminals, removable terminal block, clamping capacity: 2 x 0.25...2 x 1 mm ² flexible cable with cable end, with double bezel Captive screw clamp terminals, removable terminal block, clamping capacity: 2 x 0.2...2 x 1.5 mm ² flexible cable with cable end, with double bezel Captive screw clamp terminals, removable terminal block, clamping capacity: 2 x 0.2...2 x 1 mm ² solid cable with cable end, with double bezel Captive screw clamp terminals, removable terminal block, clamping capacity: 1 x 0.25...1 x 2.5 mm ² flexible cable with cable end, with double bezel Captive screw clamp terminals, removable terminal block, clamping capacity: 1 x 0.2...1 x 2.5 mm ² solid cable with cable end, with double bezel Captive screw clamp terminals, removable terminal block, clamping capacity: 1 x 0.2...1 x 2.5 mm ² flexible cable with cable end, with double bezel |
| Output type | Relay instantaneous opening 3 NO, volt-free |
| Number of additional circuits | 0 |
| [Us] rated supply voltage | 24 V DC (- 15...10 %) 24 V AC (- 15...10 %) |

Complementary

| | |
|-------------------------------------|--|
| Synchronisation time between inputs | Unlimited |
| Supply frequency | 50/60 Hz |
| Power consumption in VA | <= 5 VA AC |
| Input protection type | Internal, electronic |
| Control circuit voltage | 24 V |
| Line resistance | 90 Ohm |
| Breaking capacity | C300: 1800 VA, AC-15 (inrush) for relay output C300: 180 VA, AC-15 (holding) for relay output |

| | |
|--|---|
| Breaking capacity | 1.5 A at 24 V (DC-13) time constant: 50 ms for relay output |
| Output thermal current | 6 A per relay for relay output |
| [I _{th}] conventional free air thermal current | 18 A |
| Associated fuse rating | 6 A fuse type fast blow for relay output conforming to EN/IEC 60947-5-1, DIN VDE 0660 part 200 4 A fuse type gG or gL for relay output conforming to EN/IEC 60947-5-1, DIN VDE 0660 part 200 |
| Minimum output current | 10 mA for relay output |
| Minimum output voltage | 17 V for relay output |
| Response time on input open | <= 40 ms |
| [U _i] rated insulation voltage | 300 V (degree of pollution: 2) conforming to IEC 60647-5-1, DIN VDE 0110 part 1 |
| [U _{imp}] rated impulse withstand voltage | 4 kV overvoltage category III conforming to IEC 60647-5-1, DIN VDE 0110 part 1 |
| Local signalling | 3 LEDs |
| Current consumption | 30 mA at 24 V AC (on power supply) |
| Mounting support | 35 mm symmetrical DIN rail |
| Product weight | 0.25 kg |


Environment

| | |
|---------------------------------------|--|
| Standards | EN 1088/ISO 14119 EN 60204-1 EN/IEC 60947-5-1 EN/IEC 61496-1 (type 4) EN/ISO 13850 |
| Product certifications | CSA TÜV UL |
| IP degree of protection | IP40 (enclosure) conforming to EN/IEC 60529 IP20 (terminals) conforming to EN/IEC 60529 |
| Ambient air temperature for operation | -10...55 °C |
| Ambient air temperature for storage | -25...85 °C |

Contractual warranty

| | |
|--------|-----------|
| Period | 18 months |
|--------|-----------|

Dimensions

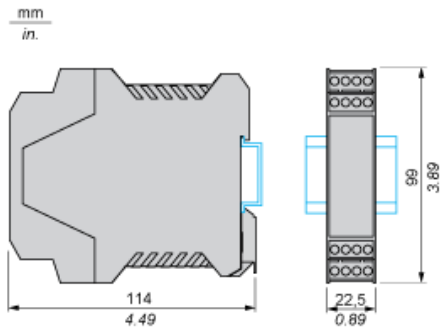

Wiring Diagrams

Refer to the Instruction Sheet

To download the instruction sheet, follow below procedure:



XPSAC5121
module XPSAC - Emergency stop - 24 V AC DC
[Download XPSAC5121 product datasheet](#)

- Discover XPSAC5121 by
- Characteristics
 - Dimensions Drawings
 - Connections and Schema
 - Technical Description
 - **Download & Documents**

Download & Documents 1 to 3 of 3 (Total: -1)

| Instruction sheet | | |
|---|--------------------|----------|
| XPSAC... Safety module for emergency stop and switch monitoring | English 2012-07-04 | pdf (28) |

Image of product

| | | |
|--------------------------------------|------------|-------------|
| Emergency stop and switch monitoring | 2010-11-10 | {Select : } |
|--------------------------------------|------------|-------------|

Certificate

| | | |
|---------------------|--------------------|----------|
| Russian certificate | English 2010-07-07 | pdf (60) |
|---------------------|--------------------|----------|

①

②

- 1 Click on Download & Documents.
- 2 Click on Instruction sheet.