

Dual Channel Transmissive Sensor

Part Number: HOA6425-001



Features

- Choice of phototransistor or photodarlington output
- PCB mount package
- Polarized locator pins
- Accurate position sensing
- 0.5mm (0.020 in.) aperture windows
- 1.78mm (0.070 in.) slot width
- Available in shipping tubes

Product Description

The HOA6425-001 consists of two infrared emitting diodes facing two NPN silicon phototransistors. Detector switching takes place whenever an opaque object passes through the slot between the emitter and the detector. The dual channels allow both the speed and the direction of the interrupter to be sensed. Emitters and detectors have a 0.5mm (0.020 in.) vertical aperture. This feature is ideal for use in applications in which high position resolution is desired. The sensor housing is an opaque thermoplastic with aperture openings for use in applications in which maximum rejection of ambient light is important and maximum position resolution is desired. The HOA6425-001 contains plastic molded components. Housing material is Valox®. Housings are soluble in chlorinated hydrocarbons and ketones. Recommended cleaning agents are methanol and isopropanol.

Absolute Maximum Ratings

(25°C free-air temperature unless otherwise stated)

CAUTION**STRESS DAMAGE**

Functional operation of the device at or above "Absolute Maximum Ratings" for extended periods of time may affect reliability.

Failure to comply with these instructions may result in product damage.

Operating Temperature Range	-40°C to 85°C	
Storage Temperature Range	-40°C to 85°C	
Soldering Temperature (5 sec)		
240°C		
IR EMITTER		
Power Dissipation	100 mW(1)	
Reverse Voltage	3 V	
Continuous Forward Current	50 mA	
DETECTOR	TRANSISTOR	DARLINGTON
Collector-Emitter Voltage	30 V	15 V
Emitter Collector Voltage	5 V	5 V
Emitter Collector Voltage	5 V	100 mW(1)
Collector DC Current	30 mA	30 mA

Electrical Characteristics (25°C unless otherwise stated)

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
IR EMITTER						
Forward Voltage	V_F			1.6	V	$I_F=20$ mA
Reverse Leakage Current	I_R			10	uA	$V_R=3$ V
DETECTOR						
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	30			V	$I_C=100$ mA
Emitter-Collector Breakdown Voltage	$V_{(BR)ECO}$	5			V	$I_E=100$ mA
Collector Dark Current	I_{CEO}			100	nA	$V_{CE}=10$ V, $I_F=0$
COUPLED CHARACTERISTICS						
On-State Collector Current	$I_{C(ON)}$	0.5			mA	$V_{CE}=5$ V, $I_F=20$ mA
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$			0.4	V	$I_F=20$ mA, $I_C=40$ mA
Rise And Fall Time	t_r, t_f		15		uS	$V_{CC}=5$ V, $I_C=1$ mA

SCHEMATIC

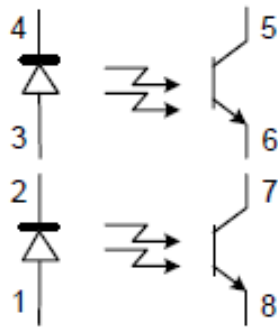


Figure 1: IRED Forward Bias Characteristics

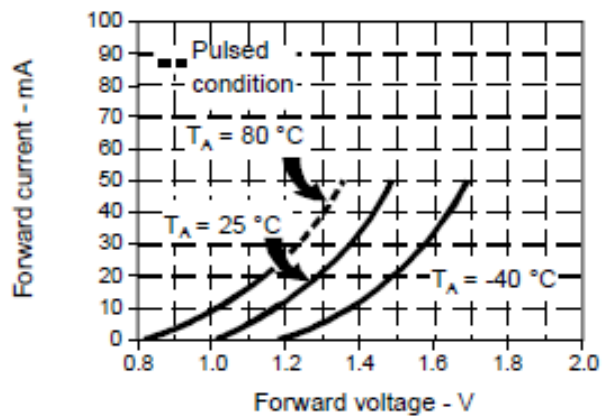


Figure 3: Detector Dark Current vs Temperature

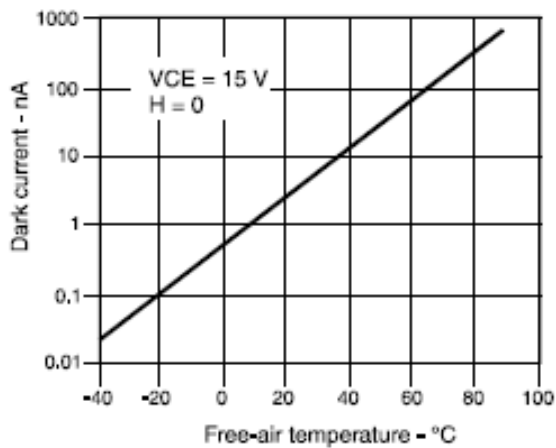


Figure 2: Non-saturated Switching Time vs Load Resistance



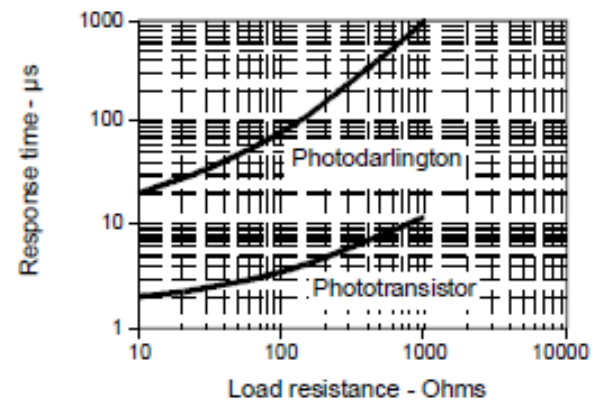


Figure 4: Collector Current vs Ambient Temperature

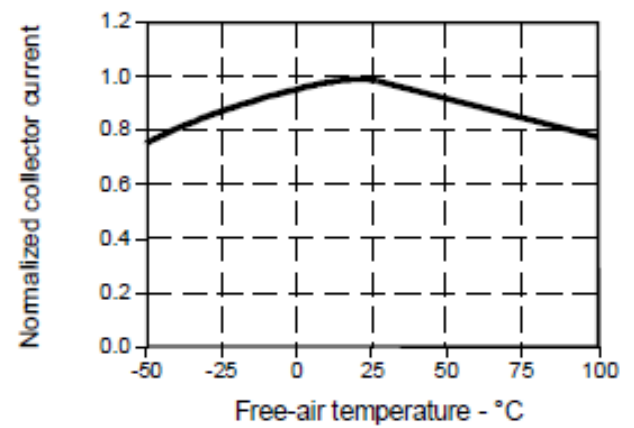

OUTLINE DIMENSIONS mm/(in.)
(for reference only)

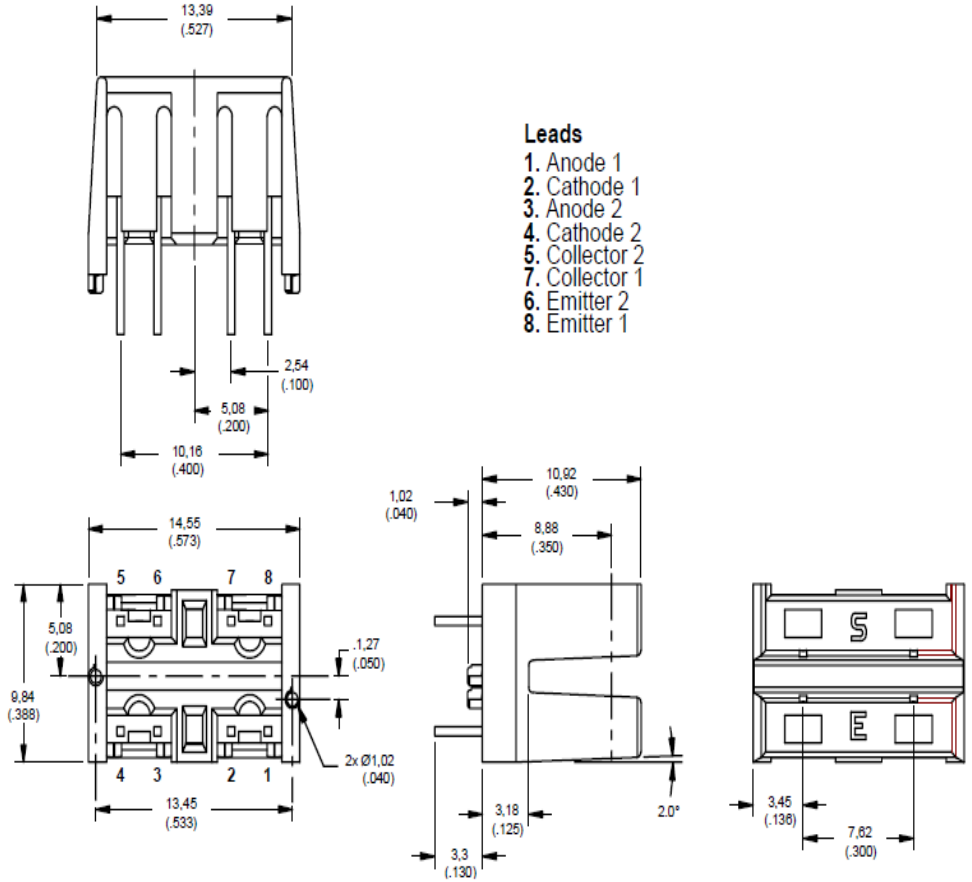

WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective material and faulty workmanship. Contact your local sales office for warranty information. If warranted goods are returned to Honeywell during that period of coverage, Honeywell will repair or replace without charge those items it finds defective. The foregoing is Buyer's sole remedy and is **in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose.** While we provide application assistance, personally, through our literature, and through the Honeywell website, it is up to the customer to determine the suitability of the product in the application. Specifications may change at any time without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

SALES AND SERVICE

MICRO SWITCH Sensing and Control serves its customers through a worldwide network of sales offices and distributors. For application assistance, current specifications, pricing or name of the nearest Authorized Distributor, contact a nearby sales office or call:

TELEPHONE

1-800-537-6945 (USA)
1-800-737-3360 (Canada)
1-815-235-6847 (International)

FAX

1-815-235-6545 (USA)

INTERNET

www.honeywell.com/sensing
info@micro.honeywell.com