

Radio interference suppression filter, three phase, low leakage current **HLD 310-500/12**



Advantages

For enhanced requirements
Low leakage current
Single-stage filter concept
Efficient filter effect against line-bound interference emissions
Increase in the interference immunity of the connected consumer

Applications

Radio interference suppression filter for line-side interference suppression of single devices, frequency converters or as group interference suppression.

Standards

Radio interference suppression filter complying with
DIN EN 60939-2, UL 1283, CSA C22.2 No.8

Approvals



UL 1283 5th edition, CSA 22.2 No 8




Radio interference suppression filter, three phase, low leakage current

HLD 310-500/12

Type		HLD 310-500/12
Electrical data	Operating data	
	Rated voltage	3 x 520 Vac
	Voltage range	0 - 3 x 520 Vac
	Rated current	3 x 12 A
	Leakage current (50 Hz)*	<0.40 mA
	Leakage current (50 Hz)**	<3.50 mA
	Power loss	9.0 W
	Overrating Capacity	150 %, shortly
	Input	
	Rated frequency	50 - 60 Hz
	Standards	
	Classification	EMI filter
	Approvals	
	Approvals	cURus, UL 1283 5th edition, CSA 22.2 No.8
	Environment	
Climatic category	25/085/21 [in accordance with EN 60068-1]	
Ambient temperature max.	50 °C	
Safety and protection		
SCCR***	100 kA	
Type	Metal enclosure	
Protection index	IP 20	
Safety class (prepared)	I	
Test voltage	2150 Vdc Phase/Phase, 2700 Vdc Phase/PE	
Notes		
*	Leakage current measured against the maximum permissible input voltage fluctuation in accordance with IEC 38 ±10 %	
**	Leakage current by loss of two phases	
***	with corresponding preliminary fuse	
Order numbers		
Order Number	HLD 310-500/12	

Type		HLD 310-500/12
Mechanical data	Terminal and mounting	
	Connections phase	Screw clamp, 4 mm ²
	Connections PE	Bolt, M5
	Fixing method	Mounting lugs
	Fixing screws	M5
	Measures and weights	
	Weight	1.20 kg

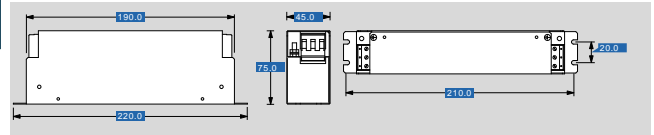

Subjects to change.