

### Electric Door Strike


**SK-990AQ**      *Fail-secure (door unlocked with power)*

**SK-990BQ**      *Fail-safe (door locked with power)*

The **SECO-LARM®** Electric Door Strike can be used to convert cylindrical lock sets into an electronic access-controlled locking system. Combine with an optional digital keypad such as the **SECO-LARM®** SK-1011-SQ for keyless high-security.

#### Features:

- Converts cylindrical lock sets into an electronic access-controlled locking system
- Can be used on virtually any cylindrical door locking system
- Easily connects to **SECO-LARM®** electronic keypads such as SK-1011-SQ or SK-1311-SQ models
- Baked painted finish
- Use fail-secure (SK-990AQ) units for entrance door installations
- Use fail-safe (SK-990BQ) units for emergency door and escape door installations

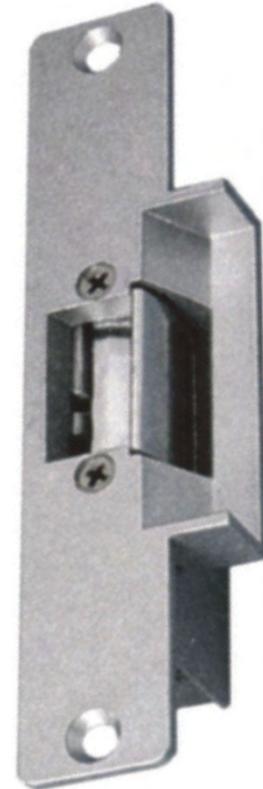

#### Specifications:

	SK-990AQ	SK-990BQ
Type	Fail-secure	Fail-safe
Circuit type	N.O.	N.C.
Input voltage	10-14VDC	
Current draw	450mA	200mA
Coil resistance	26Ω	60Ω
Polarity	None	
Weight	350g	

#### Also Available from SECO-LARM®:

No-Touch  
Request-to-Exit Sensor



SD-927PKC-NEQ

Electromagnetic Lock



E-941SA-1200

Stand-Alone Keypad



SK-1011-SQ

Request-to-Exit Plate



SD-7202GC-PEQ

Access Control  
Power Supply



EAP-5D1Q

#### SECO-LARM®

16842 Millikan Ave, Irvine, CA 92606

Tel: 949-261-2999 / 800-662-0800 • Fax: 949-261-7326

sales@seco-larm.com • www.seco-larm.com



Copyright 2013 © SECO-LARM U.S.A, Inc. All rights reserved. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA SLI®