


### Features

- STM32 microcontroller in LQFP144 package
- Two types of extension resources:
  - ST Zio connector including: support for Arduino™ Uno Revision 3 connectivity (A0 to A5, D0 to D15) and additional signals exposing a wide range of peripherals (A6 to A8, D16 to D72)
  - ST morpho extension pin header footprints for full access to all STM32 I/Os
- ARM® mbed™ -enabled (see <http://mbed.org>), planned for the second quarter of 2016
- On-board ST-LINK/V2-1 debugger/programmer with SWD connector:
  - Selection-mode switch to use the kit as a standalone ST-LINK/V2-1
  - USB re-enumeration capability. Three different interfaces supported on USB: virtual com port, mass storage, debug port
- Flexible board power supply:
  - 5V from ST-LINK/V2-1 USB VBUS
  - External power sources: 3.3 V and 7 - 12 V on ST Zio or ST morpho connectors, 5 V on ST morpho connector
- USB OTG or device full speed with Micro-AB connector (depending on STM32 support)
- IEEE-802.3-2002 compliant Ethernet connector (depending on STM32 support)
- Three user LEDs
- Two push buttons: USER and RESET
- LSE crystal:
  - 32.768KHz crystal oscillator
- Comprehensive free software HAL library including a variety of software examples
- Supported by wide choice of Integrated Development Environments (IDEs) including IAR™, Keil®, GCC-based IDEs, ARM® mbed™

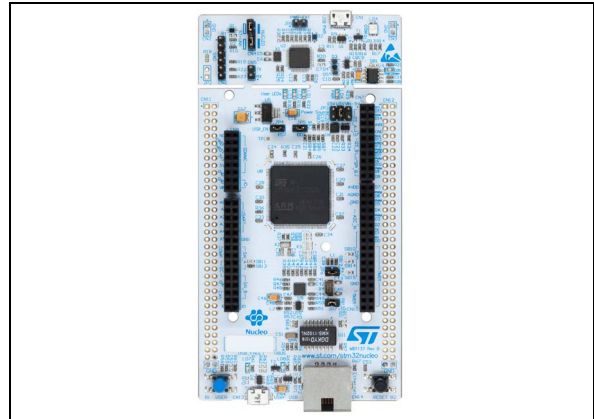

1. Picture not contractual

### Description

The STM32 Nucleo-144 board provides an affordable and flexible way for users to try out new concepts and build prototypes with the STM32 microcontroller, choosing from the various combinations of performance, power consumption and features. The ST Zio connector, which is an extension of Arduino™ Uno, provides access to more peripherals and ST morpho headers make it easy to expand the functionality of the Nucleo open development platform with a wide choice of specialized shields. The STM32 Nucleo-144 board does not require any separate probe, as it integrates the ST-LINK/V2-1 debugger/programmer and it comes with the STM32 comprehensive software HAL library, together with various packaged software examples, as well as a direct access to the ARM® mbed™ online resources.

**Table 1. Device summary**

| Reference     | Part number  |
|---------------|--|
| NUCLEO-XXXXZX | NUCLEO-F207ZG, NUCLEO-F303ZE, NUCLEO-F429ZI, NUCLEO-F446ZE, NUCLEO-F746ZG. |



# 1 Ordering information

[Table 2](#) lists the order codes and the respective targeted STM32.

**Table 2. Ordering information**

| Target STM32  | Order code    |
|---------------|---------------|
| STM32F207ZGT6 | NUCLEO-F207ZG |
| STM32F303ZET6 | NUCLEO-F303ZE |
| STM32F429ZIT6 | NUCLEO-F429ZI |
| STM32F446ZET6 | NUCLEO-F446ZE |
| STM32F746ZGT6 | NUCLEO-F746ZG |

Order code codification NUCLEO-TXXXZY meaning:

- T describes the STM32 family (F or L)
- XXX describes the silicon special features
- Z describes the pin count (Z for 144 pins)
- Y describes the Flash memory size (E for 512KB, G for 1MB, I for 2MB)

This order code is mentioned on a sticker placed on top side of the board.

## 2 Revision history

**Table 3. Document revision history**

| Date        | Revision | Changes          |
|-------------|----------|------------------|
| 21-Dec-2015 | 1        | Initial version. |

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2015 STMicroelectronics – All rights reserved