

# XVBC4B6

## INDICATING BANK LENS 48VDC 10W +OPTIONS



### Main

Commercial Status	Commercialised
Range of product	Harmony XVB Universal
Product or component type	Indicator bank
Beacon or indicator bank unit type	Illuminated unit
Signalling type	Flashing
Mounting diameter	70 mm
Component name	XVBC
Material	Polycarbonate
Light source	Blue bulb not included
Bulb type	Protected LED Incandescent with BA 15d base Incandescent
[Us] rated supply voltage	24...48 V DC 24 V AC

### Complementary

Assembly style	Customer assembly, up to 5 units
Power dissipation in W	$\leq 7$ W
Connections - terminals	Screw clamp terminals: $\leq 1 \times 1.5 \text{ mm}^2$ with cable end
[Ui] rated insulation voltage	250 V conforming to IEC 60947-1
Nominal voltage limit	$0.85 \dots 1.1 U_n$ conforming to IEC 60947-5-1
[Uimp] rated impulse withstand voltage	4 kV conforming to IEC 60947-1
Flashing frequency	1 Hz
CAD overall width	70 mm
CAD overall height	63 mm
CAD overall depth	70 mm
Product weight	0.16 kg

### Environment


Pollution degree	2
Product certifications	CCC CSA C22-2 No 14 GOST UL 508
Standards	EN/IEC 60947-5-1
Protective treatment	TC
Ambient air temperature for storage	-40...70 °C
Ambient air temperature for operation	-25...50 °C, with LED -25...50 °C, with incandescent
Class of protection against electric shock	Class II on base unit conforming to IEC 61140 Class I on support tube conforming to IEC 61140
IP degree of protection	IP66 on base unit conforming to IEC 60529 IP65 on fixing base XVBZ0. conforming to IEC 60529
NEMA degree of protection	NEMA 4X indoor conforming to UL 508

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Indicator Bank without “Flash” Discharge Tube Unit

Dimensions

Below drawing shows the minimum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

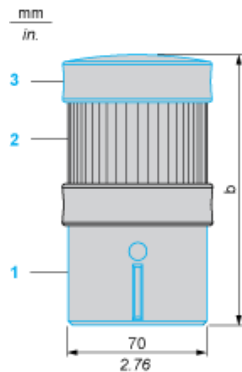


- (1) Base unit XVBC21, to be ordered separately
- (2) Illuminated or audible signalling unit
- (3) Cover (supplied with XVBC21 base unit)

Number of illuminated or audible signalling units (no “flash”)	b in mm	b in in.
1	138	5.43
2	201	7.91
3	264	10.39
4	327	12.87
5	390	15.35

Indicator Bank with “Flash” Discharge Tube Unit

Dimensions

Below drawing shows the minimum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

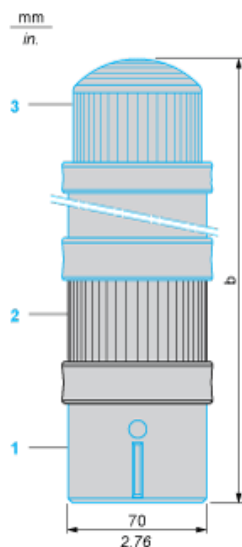

- (1) Base unit XVBC07, to be ordered separately
- (2) Illuminated or audible signalling unit
- (3) “Flash” unit, to be ordered separately

Number of illuminated or audible signalling units other than "flash" tube	b in mm	b in in.
1	295	11.61
2	358	14.09
3	421	16.57
4	484	19.06