

Copyright @2008 by this company. No. Part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system or translated into any language or computer language, in any form or any means. Electronic, mechanical, magnetic, optical, chemical, manual or otherwise, without the prior written permission of this company.

SAFETY INSTRUCTION

1. Never push objects of any kind, or spill liquid of any kind into these products.
2. Do not attempt to service this product yourself, as opening or removing covers may expose you to dangerous voltage points or other risk. Refer all servicing to qualified service personnel, if any misuse mentioned above happened or any accident dropping, miss-operations occurred.

7. Security notes

The unit is only suitable for indoor use. The heat being generated in the unit has to be removed via air circulation. Therefore the circulation vents at the housings must not be covered with any objects.. Do not insert or drop anything into the air vents ! This could result in a short circuit. If the unit is used for purposes other than originally intended, if it is connected in the wrong way or not repaired by authorized skilled personnel, there is no liability for possible damage. To cleaning only use a dry, soft cloth, by no means chemicals or water. If the unit is to be scrapped take it to a local recycling plant for disposal.

8. Technical Data

LCD technology : TFT active matrix

Display size: Diagonally measured 7"

Color system: NTSC and PAL Dual System

Sync. :hor. 15 625 Hz, vert. 50 Hz.

Number of pixels: 1440 x 234

Audio level: 1V/10k Battery Charger: 15V 1A

Dimensions : LSM-7323 Front panel 193.8x 133.2 mm

Weight : 2 Kgs

5. Operation

- 1) Switch on the device with the Main power switch (2)
- 2) Select the right Video input (1)
- 3) Adjust the Brightness control \leftarrow \rightarrow in order to obtain an image as clear and sharp as possible.
- 4) Adjust the Volume for the headphones to desired level with the volume control (Optional)
- 5) You may push the reverse image function button (10) if the monitor is connected to a Rear View Camera.
- 6) Please push OSD Control Menu (7) bottom to select the Brightness, Contrast, and Display Mode that you wish to change, then use \leftarrow \rightarrow to get desired picture.

Display modes:

- a. 4:3 , b. Linear 16:9 c. Non-Linear 16:9, please use \leftarrow bottom to change the Display modes.

CAUTION: When using headphones do not adjust a high vol.

Permanent high volumes may damage person's hearing! The human ear gets accustomed to high volumes which do not seem to be that high after some time. Therefore, do not further increase a high volume after getting used to it.

6. Application range

The LCD color monitors offer a sharp and high contrast display. They can be universally applied, e.g. in surveillance systems, in reverse monitoring car systems or for multimedia applications. Moreover, an additional Audio input enables sound transmission via headphone

1.Contents :

1. 7" Monitor x 1
2. Carry Bag x 1
3. Waist Belt x 1
4. RCA to BNC Adapter x 4
5. 30cm Power Lead x 1
6. 1000mA Energy Saving Li-ion Rechargeable Battery
7. 15V Battery Charger X 1, this is used only to recharge the battery.
Do not connect direct to the LCD Monitor. This may cause damage.

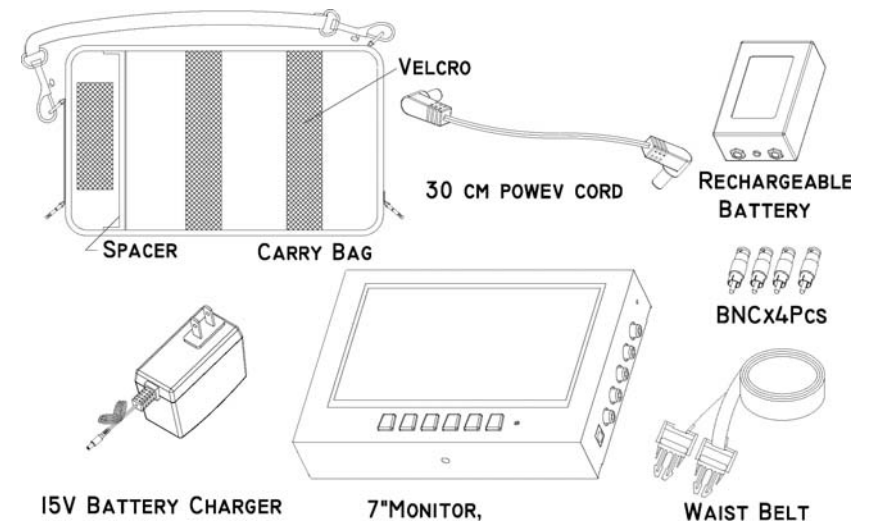


Fig. 1. Accessories

2 . Power Operating Elements

1. Please charge the Li-ion Battery for one and half hours at first time been used. It will be automatically fully charged.
2. Please stick the two velco strips on the back of the monitor. Then put in the proper position in the carry bag, so that the velco will be securely fastened onto the monitor to avoid vibration.
3. Connect the battery to monitor as power source by 30cm power cord.

Energy Saving Li-ion Rechargeable Battery

- 3.1.) Please push the energy-saving ON-OFF switch ON while using and charging the battery.
- 3.2.) Please switch the battery OFF after using it to avoid unnecessary power drain of battery.




Fig. 2 Energy Saving Li-ion Rechargeable Battery

3. Connection

- 1) Connect the Video source to Video input I or II (1 or 2) .
- 2) Connect the Audio input (4) (Optional)
- 3) Selector the correct Input (11) Source
- 4) Connect an electronically regulated 12V power supply (6)
The positive pole must be connected to the medium contact.
- 5) Connect the Audio Out Put (3) (Optional)

4. Connections And Controls

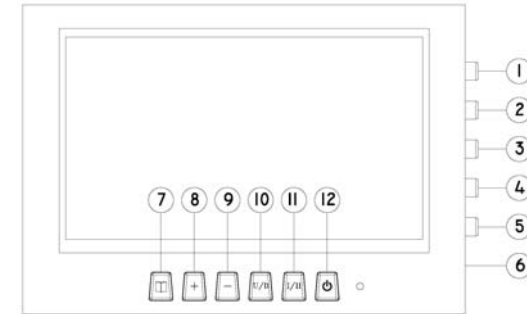


Fig. 3 Connectors and Controls

- | | | | |
|----|-------------------------------------|----|--------------------------------------|
| 1 | Video I Input | 2 | Video II Input |
| 3 | Video Out-Put | 4 | Audio Input (Optional) |
| 5 | Audio Out-Put ((Optional) | 6 | DC 12V Power Input |
| 7 | OSD Menu | 8 | ☐ Increase (default to Brightness) |
| 9 | ☐ Decrease (default to Brightness) | | |
| 10 | Left-Right-Up-Down Reverse | 11 | Video Input selector |
| 12 | Main Power | 13 | LED Power Indicator |



LSM – 7323

7” Color Service Monitor

User’s Manual

Version 2.3