

320 Series True-rms Clamp Meters

Fluke rugged. Fluke precise. Fluke reliable.

The Fluke 323, 324 and 325 Clamp Meters are designed to perform in the toughest environments and provide noise-free, reliable results users can trust to confidently diagnose problems. True-rms measurements and optimized ergonomics make the 320 Series Clamp Meters the best general troubleshooting tools for commercial and residential electricians.

New



Technical Data

Measurement capability

- 400 A ac current measurement (ac and dc current; 325 only)
- 600 V ac and dc voltage measurement
- True-rms ac voltage and current for accurate measurements on non-linear signals
- Resistance measurement to up to 40 kΩ with continuity detection
- Temperature and capacitance measurement (324 and 325 only)
- Frequency measurement (325 only)

Features

- Slim, ergonomic design
- Large, easy to read backlight display (324 and 325 only)
- CAT IV 300 V/CAT III 600 V safety rating
- Hold button
- Two-year warranty
- Soft carrying case

Specifications

		323	324	325
AC current	Range	400.0 A	40.00 A/400.0 A	40.00 A/400.0 A
	Accuracy	2 % ± 5 digits (45 Hz to 65 Hz) 2.5 % ± 5 digits (65 Hz to 400 Hz)	1.5 % ± 5 digits (45 Hz to 400 Hz) Note: Add 2 % for position sensitivity	2 % ± 5 digits (45 Hz to 65 Hz) 2.5 % ± 5 digits (65 Hz to 400 Hz)
DC current	Range	—	—	40.00 A/400.0 A
	Accuracy	—	—	2 % ± 5 digits
AC voltage	Range	600.0 V	600.0 V	600.0 V
	Accuracy	1.5 % ± 5 digits	1.5 % ± 5 digits	1.5 % ± 5 digits
DC voltage	Range	600.0 V	600.0 V	600.0 V
	Accuracy	1.0 % ± 5 digits	1.0 % ± 5 digits	1.0 % ± 5 digits
Resistance	Range	400.0 Ω/4000 Ω	400.0 Ω/4000 Ω	400.0 Ω/4000 Ω/40.00 kΩ
	Accuracy	1 % ± 5 digits	1 % ± 5 digits	1 % ± 5 digits
Continuity		≤ 70 Ω	≤ 30 Ω	≤ 30 Ω
Capacitance		—	100.0 μF to 1000 μF	100.0 μF to 1000 μF
Frequency		—	—	5.0 Hz to 500.0 Hz
AC response		True-rms	True-rms	True-rms
Backlight		—	Yes	Yes
Data hold		Yes	Yes	Yes
Contact temperature		—	-10.0 °C to 400.0 °C (14.0 °F to 752.0 °F)	-10.0 °C to 400.0 °C (14.0 °F to 752.0 °F)
Min/Max		—	—	Yes
Size	H x W x D (mm)	207 x 75 x 34	207 x 75 x 34	207 x 75 x 34
	Max wire diameter	30 mm (600 MCM)	30 mm (600 MCM)	30 mm (600 MCM)
	Weight	265 g	208 g	283 g
Category rating		CAT III 600 V CAT IV 300 V	CAT III 600 V CAT IV 300 V	CAT III 600 V CAT IV 300 V
Warranty		Two-year	Two-year	Two-year

Ordering information

323 True-rms Clamp Meter

324 True-rms Clamp Meter

325 True-rms Clamp Meter

Included with all models

Clamp meter, test leads, soft case, and users manual.

Fluke. *Keeping your world up and running.®*

Fluke Corporation
PO Box 9090, Everett, WA 98206 U.S.A.

Fluke Europe B.V.
PO Box 1186, 5602 BD
Eindhoven, The Netherlands

For more information call:
In the U.S.A. (800) 443-5853 or
Fax (425) 446-5116
In Europe/M-East/Africa +31 (0) 40 2675 200 or
Fax +31 (0) 40 2675 222
In Canada (800)-36-FLUKE or
Fax (905) 890-6866
From other countries +1 (425) 446-5500 or
Fax +1 (425) 446-5116
Web access: <http://www.fluke.com>


©2012 Fluke Corporation.
Specifications subject to change without notice.
Printed in U.S.A. 5/2012 4217271A_EN

Modification of this document is not permitted without written permission from Fluke Corporation.

T90/T110/T130/T150 Voltage and Continuity Testers

Rugged, high-quality testers for fast test results the way you need them

All electricians need a two-pole tester. Experienced professionals know that they can—and should—trust their job, their reputation and even their personal safety to Fluke electrical test tools. Our new family of two-pole voltage and continuity testers is no exception. Built with state-of-the-art measurement and safety technology, these testers offer everything you expect from Fluke, and a little bit more.

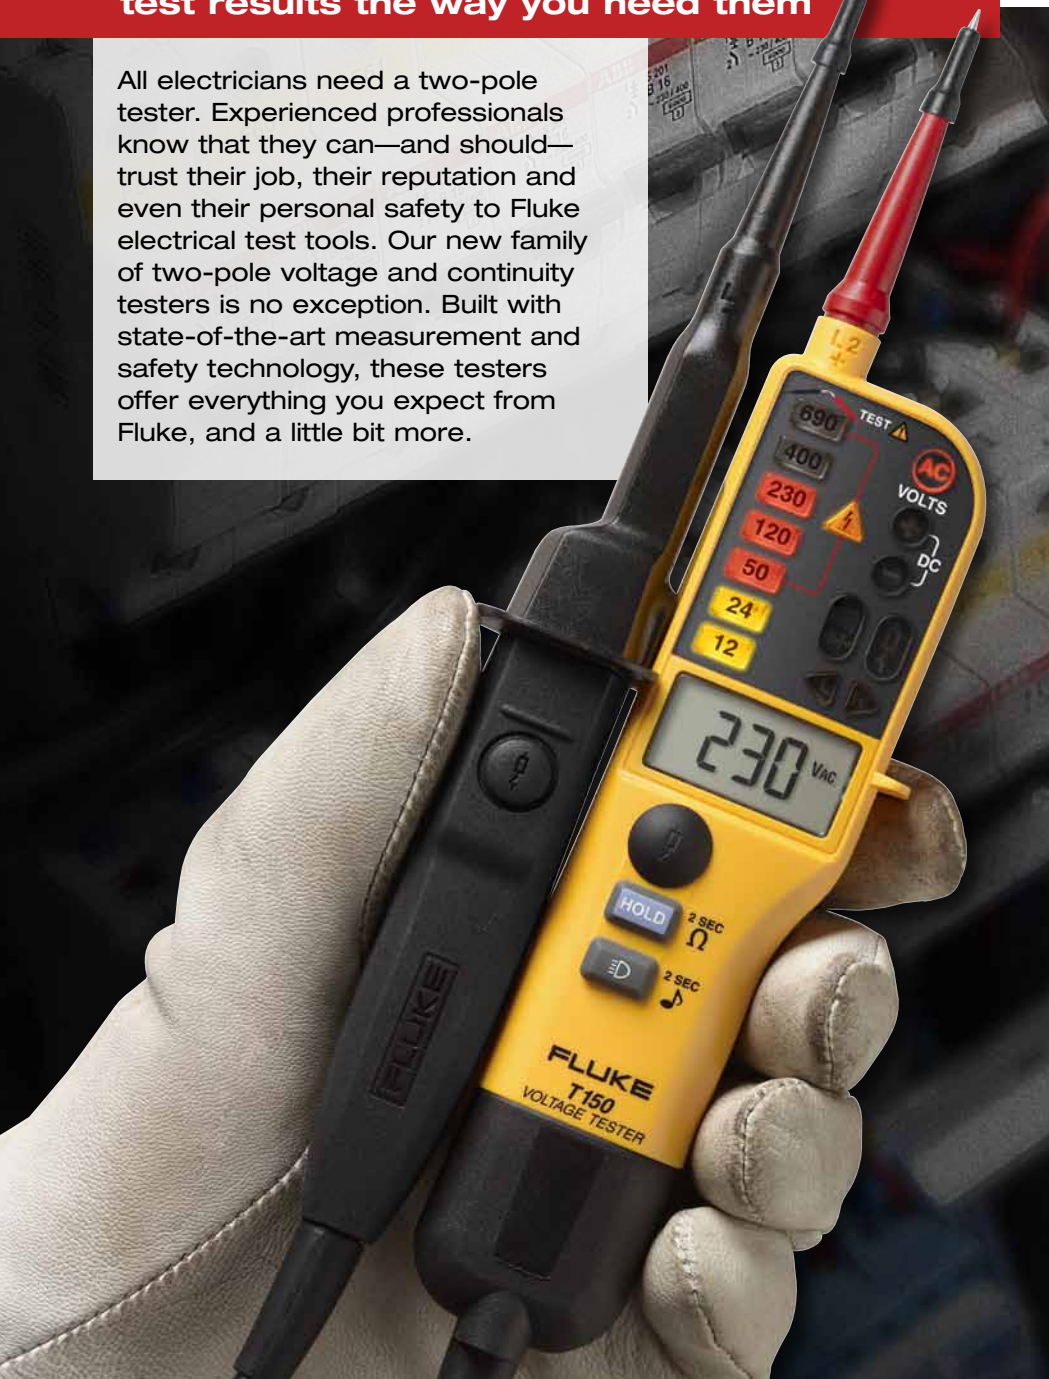

Technical Data

Listening to customers. Making better tools.

The new Fluke two-pole voltage and continuity testers are now more rugged and easier to use than ever before.

- Fast test results the way you need them, with large, easy-to-use buttons, bright backlights, and clear audible and physical indicators designed for any work situation.
- Rugged, high-quality construction is built to last. This includes a heavy duty molded case, a thicker cord with wear indicator, sturdy battery case, and well-fitting and durable probe protector.
- Enhanced ergonomic design feels good in your hand, is easy to use (even with gloves) and quick, secure probe docking.
- A complete family of testers with the features, functions, and price/performance to fit your applications and preferences.

Built to work the way you work

Fluke's new two-pole testers are built with you in mind. They give you the best combination of safety, ease-of-use and fast answers available anywhere.

- **CAT IV 600 V, CAT III 690 V safety rating.**

Fluke's new family of two-pole testers comply with both regulation HSE GS 38 (tip caps) and IEC EN 61243-3: 2010, the most recent and applicable standards for this type of test equipment.

- **4 ways to detect ac/dc voltage.**

Fluke two-pole testers make answers easy to understand, indicating voltage four ways: A clear, instantly visible LED indicator, a bright digital display of the measurement value, an audible continuity test, and vibration to give tactile feedback (vibration indicator on T110, T130, T150). It's your preference. Use the most effective method for each situation.



- **Backlit graduated scale and backlit indicators.** Bright backlights ensure that the buttons and the indicators are visible under any lighting conditions—and you can easily see and understand the answers.

- **Vibration provides tactile feedback (T110, T130, T150).** Even when viewing the display or hearing the beeper is difficult, you'll know voltage is present. This is especially useful in noisy environments, or when you can't take your eyes off the probes.

- **Audio on/off for testing in quiet areas.**

If you're working in quiet surroundings, such as a medical or office setting, you don't want to disturb people in the vicinity with noises. The tester's acoustic alert switches on or off to fit your environment.

- **Never guess whether your batteries are in good working order.** The low battery indicator gives you advance warning when they fall below proper working voltage.

- **Detects voltage even with discharged batteries.**

The tester can still detect the presence of voltage (>50 V ac, >120 V dc) even with dead batteries, an important safety feature. You should always use your two-pole tester with working batteries, but for that rare time when your batteries fail in the field, it's nice to know you still have this one indication of live voltage.

- **Improved probe docking for secure storage.**

When the probes are docked, the two-pole tester is ready to use, with proper spacing for instant testing on standard outlets. If you've ever been frustrated with wobbly probes that slowed you down, you'll appreciate Fluke's rugged design.

- **Phase rotation indicator for 3-phase systems.**

Where three-phase power supplies feed motors, drives and electrical systems, use Fluke's innovative three-phase rotation detection system to quickly determine phase sequence. Ensure the system is wired correctly, without reaching for another tool.

- **RCD functionality.** Convenient two-button controls allow you to draw more current from the circuit under test and intentionally trip Residual-Current Devices (RCDs) remotely and determine if they are wired correctly. A Quick Start Guide covering the basics of RCD testing is included with the product.

- **Display hold (T130, T150).** Focus on placing your probes, take the measurement, then read the LC display.

- **Built in electric torch (T110, T130, T150).**

Light up dim testing environments at the touch of a button for faster, safer probing.



- **Single-phase voltage offers fast identification of live conductors.** Need to verify that a row of “hot” conductors are indeed connected to power? The two-pole tester can tell with you a single touch of the main probe. Simply touch a live conductor and the probe instantly give an audible and visual signal if the power is on. A great timesaver before you begin actual testing.

- **Probe tip protection adapts to your changing environment.** Push-on probe tips reduce metal exposure from 19 mm to 4 mm, reducing the chance of accidentally touching the wrong conductor when probing in tight spaces. The probe tips of the two-pole tester are threaded, taking optional screw-on 4 mm diameter tips for applications where more sturdy probing may be required.



- **Probe tip protector and storage accessory.** Never lose the push-on caps and 4 mm diameter tips again. As a bonus, the tool’s storage serves as an extra hand when opening UK electrical safety outlets.

- **Resistance testing (T150).** Testers measure and display resistance up to 1999 ohms, adding more power and versatility to this essential tester.

- **WearGuard™ insulation shows damage to test leads.** The two-pole tester’s rugged, durable test leads have two layers of insulation for added durability. But if the inner, contrasting-colored layer is showing, that’s a sign that the test leads have been damaged and replacement is in order.

Selection table

Features	T90	T110	T130	T150
Backlit LED indicator	•	•	•	•
Backlit LCD digital display			LCD	LCD
Continuity test—visual results	•	•	•	•
Continuity test—audible results	•	with on/off	with on/off	with on/off
Vibratory indicator under load		•	•	•
Display hold			•	•
Voltage test	•	•	•	•
Indication of polarity	•	•	•	•
Resistance measurement				•
Switchable load		•	•	•
Single pole test for phase detection	•	•	•	•
Rotary field indicator		•	•	•
Probe tip protection	•	•	•	•
Voltage display with discharged batteries	•	•	•	•
Electrical torch function		•	•	•
Wear indicator test lead wire	•	•	•	•

Specifications

	T90	T110	T130	T150
Voltage ac/dc	12 V to 690 V	12 V to 690 V	6 V to 690 V	6 V to 690 V
Continuity	0 to 400 kΩ			
Frequency	0 / 40 to 400 Hz			
Phase rotation	—	100 V to 690 V		
Resistance measurement	—	—	—	Up to 1999 Ω
Response time (LED indicator)	< 0.5 s			
200 kΩ input impedance	Current draw 3.5 mA @ 690 V, Current draw 1.15 mA @ 230 V			
7 kΩ input impedance (with load buttons pressed)	—	Current draw 30 mA @ 230 V		
Safety rating	CAT II 690 V CAT III 600 V	CAT III 690 V, CAT IV 600 V		
IP rating	IP54	IP64	IP64	IP64

General specifications

Power requirement	2-AAA batteries
Net weight	180 g (6.4 oz) (T90) 280 g (9.9 oz) (T110, T130, T150)
Size (LxWxH)	23 cm x 6.5 cm x 3.8 cm (T90) 26 cm x 7 cm x 3.8 cm (T110, T130, T150)
Warranty	2 years
Country of origin	Romania

Ordering information

- FLUKE-T90** Voltage/Continuity Tester
FLUKE-T110 Voltage/Continuity Tester With Switchable Load
FLUKE-T130 Voltage/Continuity Tester With LCD, Switchable Load
FLUKE-T150 Voltage/Continuity Tester With LCD, Ohms, Switchable Load

Fluke. *Keeping your world up and running.*®

Fluke Europe B.V.
P.O. Box 1186
5602 BD Eindhoven
The Netherlands
Web: www.fluke.com

For more information call:
In Europe/M-East/Africa +31 (0)40 2 675 200
or Fax +31 (0)40 2 675 222

Fluke (UK) Ltd.
52 Hurricane Way
Norwich, Norfolk
NR6 6JB
United Kingdom
Tel.: +44 (0)20 7942 0700
Fax: +44 (0)20 7942 0701
E-mail: industrial@uk.fluke.nl
Web: www.fluke.co.uk

©2011 Fluke Corporation.
Specifications subject to change without notice.
Printed in U.S.A. 11/2011 4115852A D-EE

Pub_ID: 11842-eng

Modification of this document is not permitted without written permission from Fluke Corporation.

Cases and Holsters

Soft Cases

C12A Meter Case

- Zippered carrying case with inside pockets and belt loop



C25 Meter Case

- Zippered carrying case with padding and inside pocket



C50 Meter Case

- Zippered carrying case with inside pocket belt loop and inside meter strap



C75 Accessory Case

- Zippered carrying case with 2 inside pockets



C90 Meter Case

- Zippered carrying case with inside pocket and belt loop



C125/C781 Meter Case

- Zippered carrying case with detachable external pouch



C195 Case

- Zippered carrying case with storage compartments
- Allows hand or shoulder use



C789 Meter & Accessory Case

- Large fabric carrying case with 3 compartments, removable handle and shoulder strap



C550 Tool Bag

- Steel reinforced frame
- Rugged ballistic cloth with heavy duty hardware
- Large zippered storage compartment with 25 pockets
- Weather resistant
- Carry all your tools to the job



Cases & Holsters Compatibility Chart		110/111/112	175/177/179	183/185	187/189	83/85/87 III	73 III	77 III	12	16	867B	27	45	7-600	T3/T5	321/322	333/334/335/336/337	1520	41B	43B	123	190 Series	706/707	712	714	715	717	718	724	725	741B/743B/744	787	789	50S/50D	51/52/53/54 II			
Soft Cases	Size (HxWxD)																																					
C12A	172 x 128 x 38																																					
C25	218 x 128 x 64																																					
C50	192 x 90 x 38																																					
C75	179 x 103 x 26																																					
C90	205 x 90 x 72																																					
C125	192 x 141 x 58																																					
C195	231 x 513 x 231																																					
C781	269 x 141 x 90																																					
C789	308 x 256 x 77																																					
C550	333 x 513 x 231																																					
Hard Cases		For multiple meters, accessories or other tools																																				
C20	256 x 154 x 106																																					
C100	397 x 346 x 122																																					
C120	346 x 397 x 128																																					
C190	410 x 474 x 135																																					
C800	230 x 385 x 115																																					
Leather Cases		For several accessories, with or without meters																																				
C510	287 x 179 x 106																																					
C520A	256 x 154 x 106																																					
C530	205 x 333 x 26																																					
Holsters																																						
C10	154 x 77 x 45																																					
C70Y, C70G	186 x 90 x 45																																					
C81Y, C80G	204 x 102 x 51																																					
H110	154 x 96 x 45																																					
Other																																						
H3	231 x 90 x 64																																					
H5	192 x 90 x 38																																					
SH100																																						

All accessories have a one year warranty

Cases and Holsters

Hard Cases

C20 Meter Case

- Heavy duty case with carrying handle and accessories storage compartment
- Top cover snaps onto back to serve as tilt stand



C100 Meter and Accessory Case

- Tough polypropylene case



C120 and C190 Cases

- Heavy duty cases with accessory storage compartments



C800 Meter and Accessory Case

- Tough polypropylene case
- Accessories and manual compartments
- Detachable lid



Holsters

C10 Meter Holster

- Snap-on yellow holster absorbs shocks and protects meter from rough handling
- Includes built-in stand and hanger loop



C70Y, C70G, C81Y, C81G Meter Holsters

- Snap-on holster absorbs shocks and protects meter from rough handling.
- Y for yellow colour, G for Gray colour
- Flex Stand™ allows meter to hand, lean or stand for convenience and best viewing
- Built-in probe and lead storage



H110 Meter Holster

- Snap-on yellow holster absorbs shocks and protects meter from rough handling.
- Built-in probe and lead storage
- Accepts ToolPak accessory for convenient hanging



H3 Clamp Meter Holster

- Fabric holster absorbs shocks and protects meter from rough handling.
- Built-in pocket for lead storage
- Convenient belt-loop with snap



H5 Electrical Tester Holster

- Rugged fabric holster includes flap for lead storage and built-in belt loop
- Fits Fluke T3 and T5 testers



SH100 Shoulder Strap

- Shoulder strap for Fluke 1520



Leather Cases

C510 Leather Meter Case

- Oiled genuine top grain cowhide
- Rugged construction with heavy duty stitching and reinforced rivets
- Large tool belt loop and top flap to secure meter
- Holds most Fluke DMMs, Thermometers, and Process Calibrators



C520A Leather Tester Case

- Oiled genuine top grain cowhide
- Oil tanned for long life
- Rugged construction with heavy duty stitching and reinforced rivets
- Large tool belt loop and top flap to secure tester
- Holds Fluke Electrical Testers



C530 Leather Accessory Case

- Genuine top grain cowhide
- Heavy duty zipper with convenient pull
- Ideal for storing Fluke leads, probes and other accessories
- Large enough to hold a meter plus accessories

