



LM506 Bluetooth® v4.0 Dual Mode Adapter

Host Controller Interface (HCI) via USB Interface

Product LM506

Part No 506-0508

E0X34-60126

Revised 26/JAN/2017



iBeacon



OSX



Linux



Win XP



Win Vista




Win 7



Win 8



Win 10

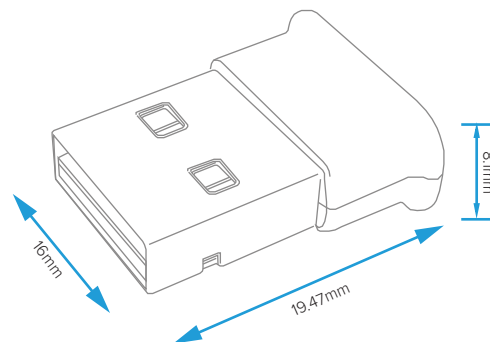

Features

- Bluetooth® v4.0 (Backwards compatible with Bluetooth® v2.0, v2.1 and v3.0)
- 0 dBm (Bluetooth® v2.0, v2.1) and 4.7 dBm (Bluetooth® Smart) Tx Output Power
- USB 2.0 (Full Speed) for data and power source
- Host Controller Interface (HCI)
- Plug and Play (OSX, Linux and Windows XP – 10 compatible)
- iBeacon compatible
- Voice and Data Application support (including VoIP over Bluetooth®)
- Stereo Audio supported
- 19.47mm x 16mm x 8.1mm
- FCC, CE / RED Directive, SRRC, TELEC RCM, IC, TRA and SIG Certified Solution
- RoHS, REACH and WEEE Compliant Solution

Overview

The LM506 Bluetooth® v4.0 dual mode adapter is a small, simple and highly compatible solution.

A plug and play USB adapter, compatible with Linux, MAC OSX and Windows XP to Windows 10 platforms. Allowing your host computer to wirelessly communicate with other nearby Bluetooth® v2.0, v2.1 and Bluetooth® v4.1 enabled devices (such as the iPhone and Android devices). Providing a low energy connection and high quality data stream.

The LM506 has many possible uses e.g. within an iBeacon and a data logger. Typically used in industries such as EPOS, M2M and automotive and is ideal for developing voice and data applications.

The adapter has a Host Controller Interface (HCI) for a simple connection via USB to a host computer or MCU.



LM506 Bluetooth® v4.0 Dual Mode Adapter

Host Controller Interface (HCI) via USB Interface

Product LM506
Part No 506-0508
EOX34-60126

General Specification

Wireless

Bluetooth® Standard	v4.0 low energy and v2.0, v2.1 wireless technologies
Adapter Type	Host Controller Interface (HCI)
OS Compatibility	OSX (Apple's Bluetooth® Stack), Linux (BlueZ) and Windows XP – 10 (Widcomm)
iBeacon Compatible	Yes

Hardware

Chipset	Broadcom
Antenna	IC Antenna Onboard
Interfaces	USB 2.0 (Full Speed)
Power Supply	5V DC (USB powered)
Crystal Oscillator	20 MHz
LED Indicator	Power/ Active (BLUE)

RF Characteristics

Tx Output Power	0 dBm (Bluetooth® v2.0, v2.1) and 4.7 dBm (Bluetooth® Smart)
Rx Sensitivity	-82 dBm (Bluetooth® v2.0, v2.1)
Current Consumption	TBA
Continuous RX	TBA
Data Rate	Up to 3Mbps
Frequency	2.4GHz to 2.485 GHz
Modulation Scheme	GFSK for 1 Mbps, $\pi/4$ -DQPSK for 2 Mbps, 8-DPSK for 3 Mbps
Spread Spectrum	FHSS (Frequency Hopping Spread Spectrum)

Physical Characteristics

Operating Temperature	-30°C to +85°C
Dimensions (L x W x H)	19.47mm x 16mm x 8.1mm
Weight	1.8 g
Certifications	FCC, CE / RED Directive, SRRC, TELEC, RCM, IC, TRA and SIG
Compliance	RoHS, REACH and WEEE



LM506 Bluetooth® v4.0 Dual Mode Adapter

Host Controller Interface (HCI) via USB Interface

Product LM506
Part No 506-0508
E0X34-60126

HCI Architecture

Within the Host Controller Interface (HCI) Architecture, the LM506 runs the HCI Firmware, Link Manager Firmware and baseband controller.


The host operating system runs the Bluetooth® v2.0, v2.1 / v4.0 user application. It also runs the Bluetooth® Stack (HCI Driver), USB Driver and other necessary drivers.

The Bluetooth® Stack (HCI Driver) exchanges data and commands with the HCI firmware via the USB interface.

The LM506 is plug and play and compatible with the OSX, Linux and Windows XP – 10 platforms.

The Bluetooth® Stack is in-built into the operating system. With the Widcomm Bluetooth® Stack Software specifically designed for the Broadcom chipset within the LM506.

The table below shows the tested OS version numbers:

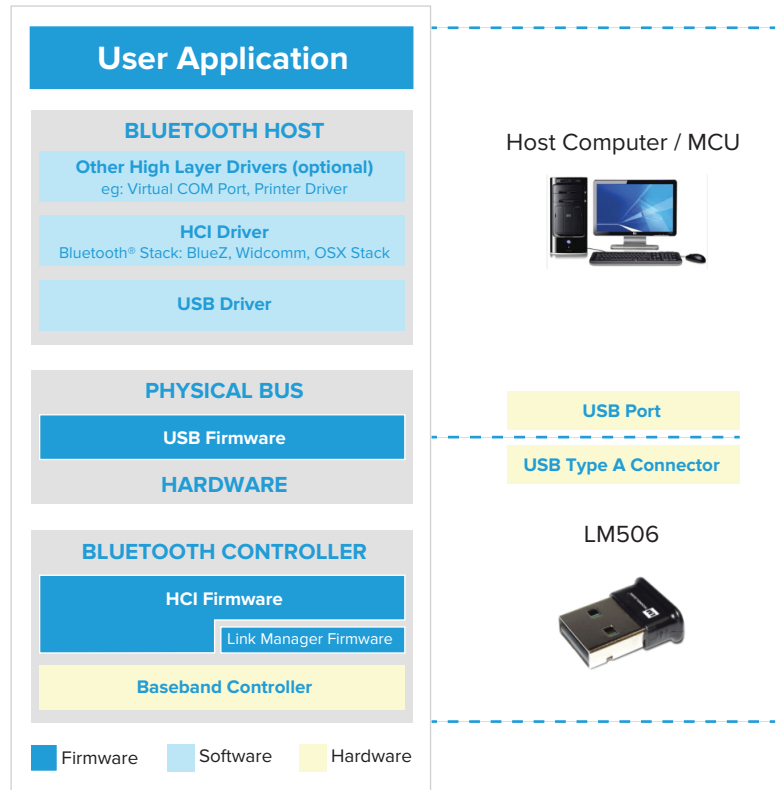

Host Operating System	Bluetooth® Stack *	LM Tested OS Version Number
MAC OSX	OSX Bluetooth® Stack	OSX 10.11 (El Capitan)
Linux	BlueZ	Ubuntu 15.10 (Kernel 4.2.0-16-generic) and Ubuntu 14.04.03 (Kernel 3.13.0-77-generic)
Windows	Widcomm	Win 10 (64-bit), Win 10 (32-Bit), Win 8/8.1 (64-bit), Win 8/8.1 (32-Bit), Win 7 (64-bit) and Win XP (32-bit)

*NOTE: Third-party Bluetooth® Stack Software can be used as an alternative to the in-built Bluetooth® Stack for more supported profiles.







LM506 Bluetooth® v4.0 Dual Mode Adapter

Host Controller Interface (HCI) via USB Interface

Product LM506
Part No 506-0508
EOX34-60126

Dimensions

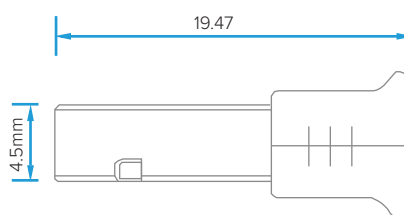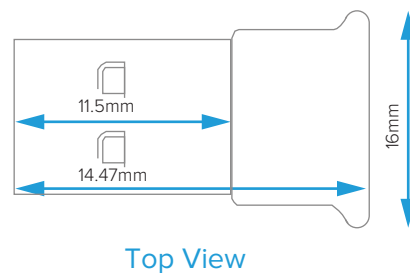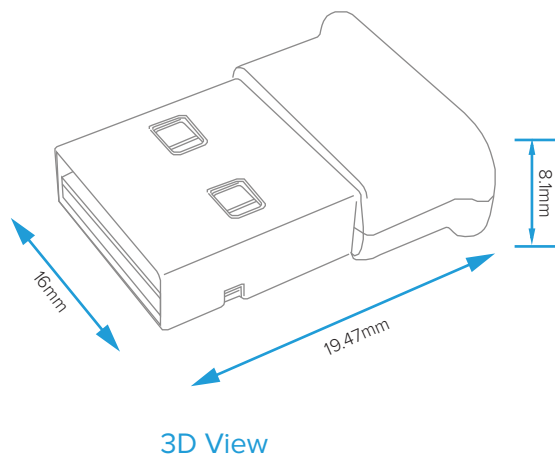

LM506 Packaging Options



506-0518
EOX34-60126

LM506 Bluetooth® USB Adapter
1 x LM506 Plug & Play USB Adapter