

## **400R SIGNAL WIRE & CABLE**


Document number: TTDS-

Issue: 1

Date: January 2016

#### **APPLICATION/USE:**

Rail approved limited fire hazard, light weight wire and cable for signal, and low voltage applications. The Insulation is a dual wall combination of TE Connectivity formulated polymer blends. Developed to meet Rail specification requirements such as NFPA 130, whilst maintaining the desirable properties of small size, lightweight, flexible and easy to handle and install.

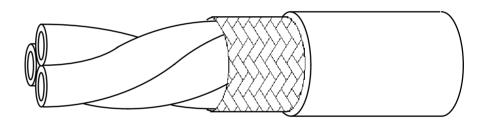

400R SERIES PRODUCT FAMILY:

400R\*1\*\*

Rail approved 600V range of Wires & Cables

Page 1 of 10
BBsisiesssdozations:

Asia: +86-21-33980184

**Australia: 1-800-144-078** 

Eire: 800-557-810

@ Germany: + 49 (0) 173-3169004

New Zealand: 0800-TYCO-HELP

N America: + 1-800-430-7226 X4 (East Coast)

N America: + 1-800-430-7226 X5 (West Coast)

**W** UK: + 44 (0) 800988 9177




## **400R SIGNAL WIRE & CABLE**

Document number: TTDS-

Issue: 1

Date: January 2016

PART DESCRIPTION

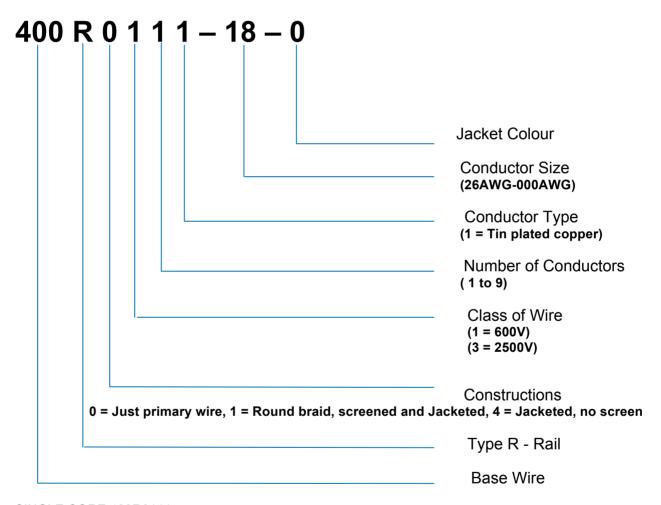

#### SINGLE CORE 400R0111-xx

Page 2 of 10

### BBsisiees \$doztidoas:

Asia: +86-21-33980184

**Australia: 1-800-144-078** 

Eire: 800-557-810

@ Germany: + 49 (0) 173-3169004

New Zealand: 0800-TYCO-HELP

N America: + 1-800-430-7226 X4 (East Coast)

N America: + 1-800-430-7226 X5 (West Coast)

**UK:** + 44 (0) 800988 9177




# **400R SIGNAL WIRE & CABLE**

Document number: TTDS-

Issue: 1

Date: January 2016

## SINGLE CORE 400R0111-xx (600V)

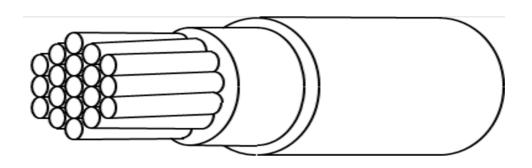

| Part Number   | Wire<br>Size | Conductor<br>Stranding | Diameter of stranded conductor |          | Max<br>Resistance | Diameter |       | Maximum<br>weight |
|---------------|--------------|------------------------|--------------------------------|----------|-------------------|----------|-------|-------------------|
|               |              |                        |                                |          | at 20°C           | inch     |       |                   |
|               | AWG          | No. x AWG              | inch min                       | inch max | Ω/1000ft          | min      | max   | lbs/1000ft        |
| 400R0111-26-* | 26           | 19 x 38                | 0.018                          | 0.021    | 41.3              | 0.032    | 0.036 | 1.4               |
| 400R0111-24-* | 24           | 19 x 36                | 0.023                          | 0.026    | 26.2              | 0.038    | 0.042 | 2.0               |
| 400R0111-22-* | 22           | 19 x 34                | 0.029                          | 0.033    | 16.2              | 0.045    | 0.049 | 3.0               |
| 400R0111-20-* | 20           | 19 x 32                | 0.037                          | 0.041    | 9.88              | 0.053    | 0.057 | 4.5               |
| 400R0111-18-* | 18           | 19 x 30                | 0.046                          | 0.051    | 6.23              | 0.063    | 0.067 | 6.8               |
| 400R0111-16-* | 16           | 19 x 29                | 0.052                          | 0.058    | 4.81              | 0.069    | 0.075 | 8.6               |
| 400R0111-14-* | 14           | 19 x 27                | 0.065                          | 0.073    | 3.06              | 0.085    | 0.093 | 13.2              |
| 400R0111-12-* | 12           | 37 x 28                | 0.084                          | 0.090    | 2.02              | 0.104    | 0.112 | 20.2              |
| 400R0111-10-* | 10           | 37 x 26                | 0.106                          | 0.114    | 1.26              | 0.125    | 0.133 | 31.1              |

### Page 3 of 10

### BBsisiees \$doztidoas:

Asia: +86-21-33980184Australia: 1-800-144-078

Eire: 800-557-810

@ Germany: + 49 (0) 173-3169004

New Zealand: 0800-TYCO-HELP

N America: + 1-800-430-7226 X4 (East Coast)
 N America: + 1-800-430-7226 X5 (West Coast)

**UK:** + 44 (0) 800988 9177




## **400R SIGNAL WIRE & CABLE**

Document number: TTDS-

Issue: 1

Date: January 2016

# TWO CORE 400R1121-xx (600v)

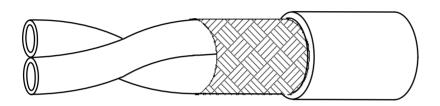

| Construction Details |              |             |                  |          |                        |       |                   |  |
|----------------------|--------------|-------------|------------------|----------|------------------------|-------|-------------------|--|
| Part Number          | Wire<br>Size | Shield size | Jacket thickness |          | ket thickness Diameter |       | Maximum<br>weight |  |
|                      |              |             |                  |          | inch                   |       |                   |  |
|                      | AWG          | AWG         | inch min         | inch nom | nom                    | max   | lbs/1000ft        |  |
| 400R1121-26-*        | 26           | 38          | 0.006            | 0.008    | 0.102                  | 0.107 | 8.1               |  |
| 400R1121-24-*        | 24           | 36          | 0.006            | 0.008    | 0.118                  | 0.123 | 11.3              |  |
| 400R1121-22-*        | 22           | 36          | 0.006            | 0.008    | 0.132                  | 0.137 | 14.5              |  |
| 400R1121-20-*        | 20           | 36          | 0.006            | 0.008    | 0.148                  | 0.153 | 18.8              |  |
| 400R1121-18-*        | 18           | 36          | 0.007            | 0.009    | 0.170                  | 0.175 | 25.7              |  |
| 400R1121-16-*        | 16           | 36          | 0.007            | 0.009    | 0.184                  | 0.189 | 30.2              |  |
| 400R1121-14-*        | 14           | 36          | 0.007            | 0.009    | 0.218                  | 0.225 | 43.2              |  |
| 400R1121-12-*        | 12           | 36          | 0.007            | 0.009    | 0.256                  | 0.265 | 61.5              |  |
| 400R1121-10-*        | 10           | 36          | 0.008            | 0.010    | 0.299                  | 0.314 | 86.3              |  |

## Page 4 of 10

### BBsisiees \$doztidoas:

Asia: +86-21-33980184Australia: 1-800-144-078Eire: 800-557-810

@ Germany: + 49 (0) 173-3169004

New Zealand: 0800-TYCO-HELP

N America: + 1-800-430-7226 X4 (East Coast)
 N America: + 1-800-430-7226 X5 (West Coast)

**UK:** + 44 (0) 800988 9177




# **400R SIGNAL WIRE & CABLE**

Document number: TTDS-

Issue: 1

Date: January 2016

# THREE CORE 400R1131-xx (600v)



| Construction Details |              |             |                  |          |       |       |                |
|----------------------|--------------|-------------|------------------|----------|-------|-------|----------------|
| Part Number          | Wire<br>Size | Shield size | Jacket thickness |          | Dian  | neter | Maximum weight |
|                      |              |             |                  |          | inch  |       |                |
|                      | AWG          | AWG         | inch min         | inch nom | nom   | max   | lbs/1000ft     |
| 400R1131-26-*        | 26           | 36          | 0.006            | 0.008    | 0.111 | 0.116 | 11.1           |
| 400R1131-24-*        | 24           | 36          | 0.006            | 0.008    | 0.124 | 0.129 | 14.4           |
| 400R1131-22-*        | 22           | 36          | 0.006            | 0.008    | 0.140 | 0.145 | 18.8           |
| 400R1131-20-*        | 20           | 36          | 0.006            | 0.008    | 0.157 | 0.163 | 25.0           |
| 400R1131-18-*        | 18           | 36          | 0.007            | 0.009    | 0.180 | 0.185 | 34.4           |
| 400R1131-16-*        | 16           | 36          | 0.007            | 0.009    | 0.196 | 0.201 | 41.1           |
| 400R1131-14-*        | 14           | 36          | 0.007            | 0.009    | 0.232 | 0.239 | 59.6           |
| 400R1131-12-*        | 12           | 36          | 0.008            | 0.010    | 0.275 | 0.282 | 86.8           |

### Page 5 of 10

### BBsisiees sdozations:

Asia: +86-21-33980184 Australia: 1-800-144-078 Eire: 800-557-810

@ Germany: + 49 (0) 173-3169004

New Zealand: 0800-TYCO-HELP

N America: + 1-800-430-7226 X4 (East Coast) N America: + 1-800-430-7226 X5 (West Coast)

**UK:** + 44 (0) 800988 9177




# **400R SIGNAL WIRE & CABLE**

Document number: TTDS-

Issue: 1

Date: January 2016

# Four Core 400R1141-xx (600v)

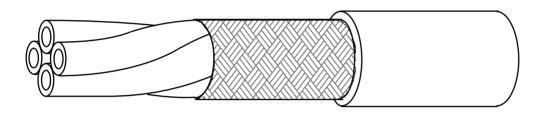

| Construction Details |              |             |                  |          |                           |       |                   |  |
|----------------------|--------------|-------------|------------------|----------|---------------------------|-------|-------------------|--|
| Part Number          | Wire<br>Size | Shield size | Jacket thickness |          | Jacket thickness Diameter |       | Maximum<br>weight |  |
|                      |              |             |                  |          | inch                      |       |                   |  |
|                      | AWG          | AWG         | inch min         | inch nom | nom                       | max   | lbs/1000ft        |  |
| 400R1141-26-*        | 26           | 36          | 0.006            | 0.008    | 0.119                     | 0.137 | 14.0              |  |
| 400R1141-24-*        | 24           | 36          | 0.006            | 0.008    | 0.134                     | 0.154 | 17.6              |  |
| 400R1141-22-*        | 22           | 36          | 0.006            | 0.008    | 0.151                     | 0.175 | 23.1              |  |
| 400R1141-20-*        | 20           | 36          | 0.007            | 0.009    | 0.172                     | 0.200 | 31.4              |  |
| 400R1141-18-*        | 18           | 36          | 0.007            | 0.009    | 0.196                     | 0.229 | 42.9              |  |
| 400R1141-16-*        | 16           | 36          | 0.007            | 0.009    | 0.213                     | 0.249 | 51.7              |  |
| 400R1141-14-*        | 14           | 36          | 0.007            | 0.009    | 0.254                     | 0.298 | 74.1              |  |
| 400R1141-12-*        | 12           | 36          | 0.008            | 0.010    | 0.302                     | 0.355 | 108.0             |  |

## Page 6 of 10

### BBsisiees \$doztidoas:

Asia: +86-21-33980184
Australia: 1-800-144-078

Germany: + 49 (0) 173-3169004

New Zealand: 0800-TYCO-HELP

N America: + 1-800-430-7226 X4 (East Coast)
 N America: + 1-800-430-7226 X5 (West Coast)

**W** UK: + 44 (0) 800988 9177



## **400R SIGNAL WIRE & CABLE**

Document number: TTDS-

Issue: 1

Date: January 2016

APPROVALS & DECLARATIONS:

NFPA 130 Vertical Flammability BSS 7238 Ds Smoke 4 Minutes BSS 7238 Dm Smoke 4 Minutes

BSS 7239 Toxicity

Operating temperature -65°C to +125°C

Maximum operating

Temperature 125°C / 10 Years

110°C / 30 Years

Fire Hazard Low toxicity, Low smoke, Highly flame retarded

Voltage rating 400R\*1\*\* 600V

400R\*3\*\* 2,500V

Conductor size range 26AWG-00AWG

Construction Single core and multi core

Colours Single core insulation available in all colour codes 0-9

Standard insulation colours black & white

Conductors Tin plated copper stranded

Page 7 of 10

BBsisiees \$doztidoas:

Asia: +86-21-33980184

Australia: 1-800-144-078

Eire: 800-557-810

@ Germany: + 49 (0) 173-3169004

New Zealand: 0800-TYCO-HELP

N America: + 1-800-430-7226 X4 (East Coast)

N America: + 1-800-430-7226 X5 (West Coast)

**W** UK: + 44 (0) 800988 9177



## **400R SIGNAL WIRE & CABLE**

Document number: TTDS-

Issue: 1

Date: January 2016

### FIRE HAZARD PERFORMANCE

| TEST                       | METHOD          | RESULT                    |  |
|----------------------------|-----------------|---------------------------|--|
| Flammability – small scale | NFPA 130        | Char Length < 1.5m        |  |
|                            | FT4 / IEEE 1202 |                           |  |
| Smoke Testing              | BSS 7238        | Ds < 50 @ 4 minutes       |  |
|                            |                 | Dm < 300 @ 4 minutes      |  |
| Toxicity                   | BSS 7239        | HCN < 100 ppm             |  |
|                            |                 | CO < 3500 ppm             |  |
|                            |                 | SO <sub>2</sub> < 100 ppm |  |
|                            |                 | HF < 100 ppm              |  |
|                            |                 | HCL < 500ppm              |  |

### Page 8 of 10

### BBaisiees sdozations:

Asia: +86-21-33980184
Australia: 1-800-144-078

Eire: 800-557-810

Germany: + 49 (0) 173-3169004

New Zealand: 0800-TYCO-HELP

N America: + 1-800-430-7226 X4 (East Coast)

N America: + 1-800-430-7226 X5 (West Coast)

**UK:** + 44 (0) 800988 9177



## **400R SIGNAL WIRE & CABLE**

Document number: TTDS-

Issue: 1

Date: January 2016

### **GENERAL PROPERTIES** (See WSD for full details)

| TEST                 |            | REQUIREMENT                                  |  |  |  |  |
|----------------------|------------|--|--|--|--|--|
| Maximum Temperatu    | ure Rating | -65 to +125°C                                |  |  |  |  |
| Voltage Rating       |            | 600V, 1,000V, 2,500V ACRMS Depending on type |  |  |  |  |
| Accelerated Aging    |            | 300°C +/- 3°C for 6 hours                    |  |  |  |  |
| Blocking             |            | 150°C +/- 3°C for 6 hours                    |  |  |  |  |
| Jacket Colour        |            | White Preferred                              |  |  |  |  |
| Dielectric Withstand | 600V       | 2,500V AC RMS, 60Hz 1 minute                 |  |  |  |  |
|                      | 2,500V     | 5,000V AC RMS, 60Hz 1 minute                 |  |  |  |  |
| Jacket Concentricity |            | 70% Minimum                                  |  |  |  |  |
| Jacket Elongation    | 600V       | 200% Minimum                                 |  |  |  |  |
|                      | 2,500V     | 150% Minimum                                 |  |  |  |  |
| Jacket TS            | 600V       | 27.5 MPa minimum                             |  |  |  |  |
|                      | 2,500V     | 17.2 MPa minimum                             |  |  |  |  |
| Jacket Flaws         | 600V       | High Frequency 4.2KV AC RMS @ 3KHz           |  |  |  |  |
|                      |            | Impulse 6.0KV Peak                           |  |  |  |  |
|                      | 2,500V     | High Frequency 8.0KV AC RMS @ 3KHz           |  |  |  |  |
|                      |            | Impulse 13.0KV Peak                          |  |  |  |  |

### Page 9 of 10

### BBsisiees \$doztidoas:

Asia: +86-21-33980184
Australia: 1-800-144-078

Eire: 800-557-810

@ Germany: + 49 (0) 173-3169004

New Zealand: 0800-TYCO-HELP

N America: + 1-800-430-7226 X4 (East Coast)
 N America: + 1-800-430-7226 X5 (West Coast)

**UK:** + 44 (0) 800988 9177



## **400R SIGNAL WIRE & CABLE**

Document number: TTDS-

Issue: 1

Date: January 2016

### **GENERAL PROPERTIES** (See WSD for full details)

| TEST                   | REQUIREMENT                    |
|------------------------|--------------------------------|
| Shield Coverage        | 85% Minimum                    |
| Voltage Withstand 600V | 2,500V AC RMS, 60Hz 1 minute   |
| 2,500V                 | 5,000V AC RMS, 60Hz 1 minute   |
| Humidity Resistance    | IR 5,000 M Ohms.1000ft Minimum |

Page 10 of 10

**Business locations:** 

Asia: +86-21-33980184
Australia: 1-800-144-078

Eire: 800-557-810

Germany: + 49 (0) 173-3169004

New Zealand: 0800-TYCO-HELP

N America: + 1-800-430-7226 X4 (East Coast)
 N America: + 1-800-430-7226 X5 (West Coast)

**UK:** + 44 (0) 800988 9177