

DURATOOL



Model: D02265
48W Soldering Station

Please read these instructions carefully before use and retain for future reference.

IMPORTANT SAFETY INFORMATION

- When using electrical appliances basic safety precautions should always be followed.
- Check that the voltage indicated on the rating plate corresponds with that of the local network before connecting the appliance to the mains power supply.
- This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved.
- If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.
- Do not leave the soldering station unattended, while it is powered on.
- Never touch the soldering tip or the surrounding metallic parts before the soldering tip has cooled down completely.
- Do not use the product near flammable items.
- Turn the power off when this product is not in use.
- The soldering iron must be placed on its stand when not in use.
- Before storage, turn the power off and allow the product to cool down to room temperature.
- Do not use this product for anything else other than that for which it is designed.
- Do not use this appliance with wet hands.
- Do not expose the soldering station to rain or moisture.
- Ensure there is sufficient space and ventilation around the appliance to allow the escape of heat and/or fumes.
- This appliance must be earthed.

WHAT'S INCLUDED?

- 1 Control Station with power cord and tip cleaning sponge
- 1 Integrated Soldering Iron
- 1 Iron Holder
- 1 User Manual


APPLICATION & OPERATION

Note: The first time you use the soldering iron, it may smoke slightly as the heating element dries out. This is normal and should only last for a few minutes.

ONLY USE FOR ELECTRICAL WORK - Acidic solder will damage the iron tip.

- Connect the mains plug and turn on the power using the rotary switch on the station. The LED will illuminate when the power is on.
- Before using the soldering iron for the first time, dampen the cleaning sponge and place it in the iron holder tray. Keep it damp during use.
- Regulate the temperature of the iron using the rotary control.
- The coloured areas correspond to the following temperatures:
Yellow - approx 150°C
Orange - approx 150 to 270°C
Red - approx 270 to 450°C
- It is recommended to use the lower part of the first red sector for lead solder and for silver solder use the lower end of the second red sector.

OVERVIEW

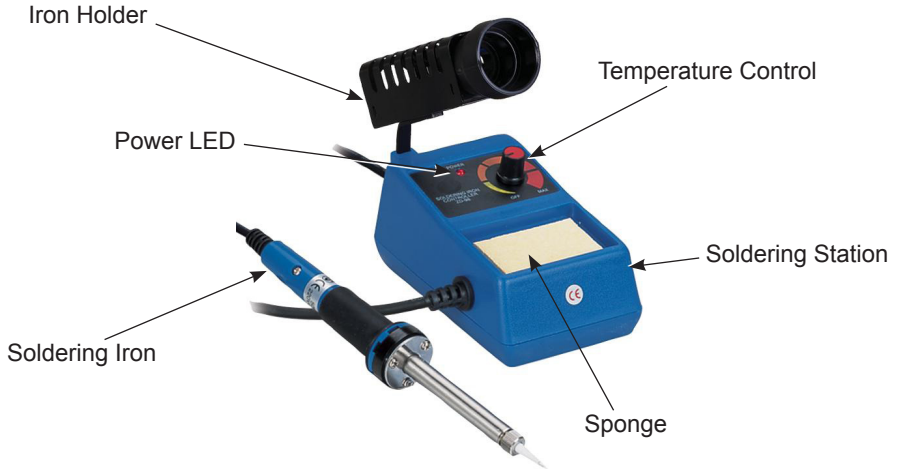

- Between use (or during breaks), always put the soldering iron in the holder.
- Lower the temperature during breaks as this extends the life of the tip.
- When the soldering work is done, adjust the temperature to 270°C or switch off the power first, clean the tip and tin with fresh solder to protect it from oxidation.
- Never file down the tips or attempt to clean using abrasives.
- Replacement tips are available for this iron. See our web pages or catalogue.



TIP REPLACEMENT

- Replacing the tip should only be done when the iron is switched off and at room temperature.
- The tip can be changed or replaced by unscrewing the knurled nut barrel.
- It is imperative that the iron is switched off, unplugged and allowed to cool before and after tip replacement.

Caution: Damage could occur if the iron is left on without the tip inserted.

- After removing the tip, blow out any remaining oxide dust that may have formed in the tip retaining area of the barrel.

Warning: Care should be taken to avoid getting dust in your eyes.

- Replace the tip and tighten the knurled nut barrel assembly with your fingers.
- Pliers should only be used to tighten the nut if loosening occurs when the iron is hot.
- Do not over tighten the nut as the element could be damaged.

CLEANING

- Cleaning should only be done when the iron is switched off and at room temperature.
- The iron may be cleaned with a damp cloth and a small amount of liquid detergent if necessary.
- Never submerge the soldering iron in liquid or allow any liquid to enter the case.
- Do not use any chemicals, abrasives or solvents that could damage the soldering iron.

TROUBLESHOOTING

- Tip heats intermittently - Mains cord damaged or a loose connection.
- Tip will not reach set temperature - Defective heating element
- Solder will not wet the tip - Tip temperature is too high.
Tip is badly oxidized and requires cleaning.
- Increased resistance between tip and ground - Check the tip attachment is tightened.

SPECIFICATIONS

Power Consumption	48W
Input Voltage	220-240V~50Hz
Temperature Range	150-450°C
Dimensions (L x W x H)	120 x 80 x 70mm
Weight	0.6kg



INFORMATION ON WASTE DISPOSAL FOR CONSUMERS OF ELECTRICAL & ELECTRONIC EQUIPMENT.

When this product has reached the end of its life it must be treated as Waste Electrical & Electronics Equipment (WEEE). Any WEEE marked products must not be mixed with general household waste, but kept separate for the treatment, recovery and recycling of the materials used. Contact your local authority for details of recycling schemes in your area.

