

Ultra96™ is an Arm-based, Xilinx Zynq UltraScale+™ MPSoC development board based on the Linaro 96Boards specification. The 96Boards' specifications are open and define a standard board layout for development platforms that can be used by software application, hardware device, kernel, and other system software developers. Ultra96 represents a unique position in the 96Boards community with a wide range of potential peripherals and acceleration engines in the programmable logic that is not available from other offerings.

Ultra96 boots from the provided Delkin 16 GB microSD card, pre-loaded with PetaLinux. Engineers have options of connecting to Ultra96 through a Webserver using integrated wireless access point capability or to use the provided PetaLinux desktop environment which can be viewed on the integrated Mini DisplayPort video output. Multiple application examples and on-board development options are provided as examples.

Ultra96 provides four user-controllable LEDs. Engineers may also interact with the board through the 96Boards-compatible low-speed and high-speed expansion connectors by adding peripheral accessories such as those included in Seeed Studio's Grove Starter Kit for 96Boards.

Micron LPDDR4 memory provides 2 GB of RAM in a 512M x 32 configuration. Wireless options include 802.11b/g/n Wi-Fi and Bluetooth 4.2 (provides both Bluetooth Classic and Low Energy (BLE)). UARTs are accessible on a header as well as through the expansion connector. JTAG is available through a header (external USB-JTAG required). I2C is available through the expansion connector.


Ultra96 provides one upstream (device) and two downstream (host) USB 3.0 connections. A USB 2.0 downstream (host) interface is provided on the high-speed expansion bus. Two Microchip USB3320 USB 2.0 ULP Transceivers and one Microchip USB5744 4-Port SS/HS USB Controller Hub are specified.

The integrated power supply generates all on-board voltages from an external 12V supply (available as an accessory).

FEATURES

- Xilinx Zynq UltraScale+ MPSoC ZU3EG A484
- Micron 2 GB (512M x32) LPDDR4 Memory
- Delkin 16 GB microSD card + adapter
 - Pre-loaded with PetaLinux environment
- Wi-Fi / Bluetooth
- Mini DisplayPort (MiniDP or mDP)
- 1x USB 3.0 Type Micro-B upstream port
- 2x USB 3.0, 1x USB 2.0 Type A downstream ports
- 40-pin 96Boards Low-speed expansion header
- 60-pin 96Boards High-speed expansion header
- 85mm x 54mm form factor
- Linaro 96Boards Consumer Edition compatible

To purchase this kit, visit www.ultra96.org

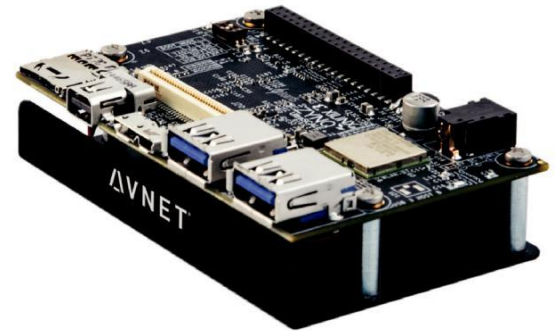

KIT INCLUDES

- Ultra96 development board
- 16 GB pre-loaded microSD card + adapter
- Voucher for SDSoc license from Xilinx
- Quick-start instruction card


OPTIONAL ADD-ON ITEMS

- External 12V @ 2.0A power supply
- USB-to-JTAG/UART pod
- Seeed Studios Grove Starter Kit for 96Boards

TARGET APPLICATIONS

- Artificial Intelligence
- Machine Learning
- IoT/Cloud connectivity for add-on sensors
- Embedded Computing
- Robotics
- Entry level Zynq UltraScale+ MPSoC development environment
- Training, prototyping and proof-of-concept demo platform
- Wireless design and demonstrations using Wi-Fi and Bluetooth

BLOCK DIAGRAM

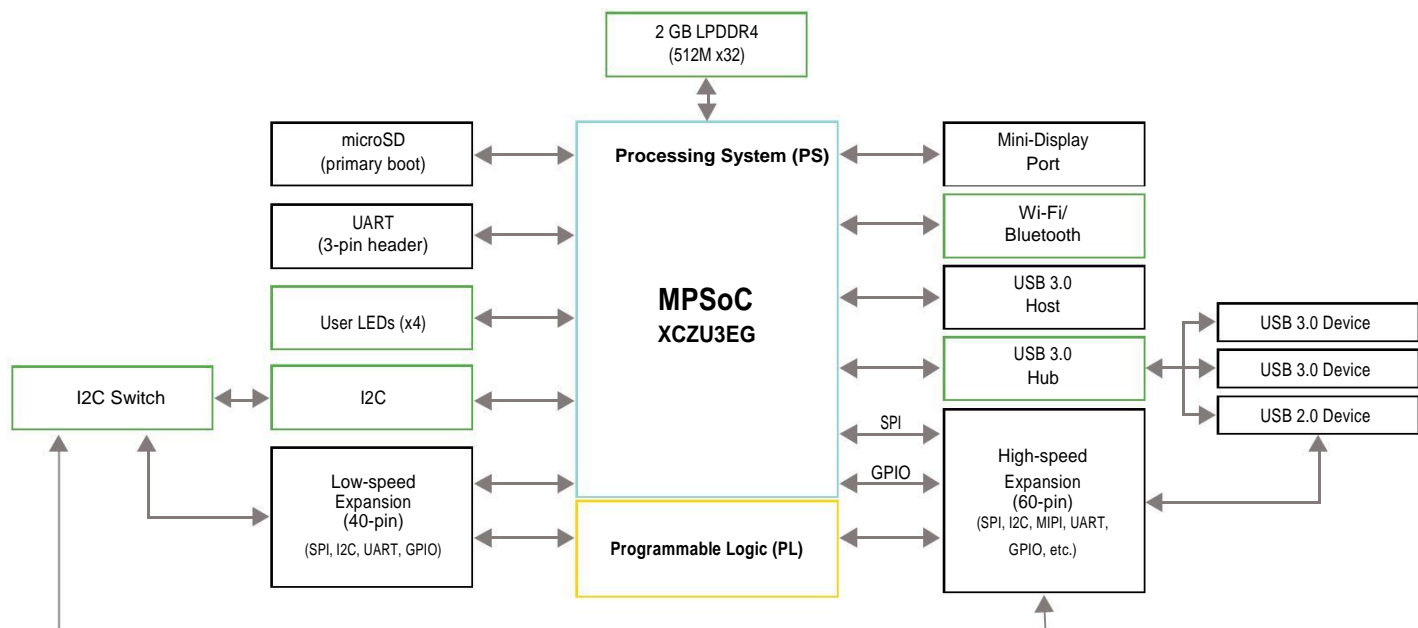

FEATURED MANUFACTURERS

Amphenol

DELKIN DEVICES
Rugged Controlled Storage.

maxim
integrated™

MICROCHIP

Micron®

muRata
Innovator in Electronics

OSRAM
Opto Semiconductors

samtec

TE
CONNECTIVITY

XILINX
ALL PROGRAMMABLE.

PARTS

Part Number	Description
AES-ULTRA96-G	Ultra96 Zynq UltraScale+ ZU3EG Development Board

RELATED PARTS

Part Number	Description
AES-ACC-U96-PWR	External 96Boards compliant power supply kit (12V, 2A, US plug)
AES-ACC-U96-JTAG	USB-to-JTAG/UART pod for Ultra96
110060157*	Grove Starter Kit for 96Boards
ADM00559	MCP2221 Breakout Module
AES-ACC-U96-4APWR	External 96Boards compliant power supply kit (12V, 4A, International plugs)

*This product is only available through <http://uk.farnell.com/seeed-studio/110060157/grove-starter-kit-for-96boards/dp/2855417>

Countries Available for Purchase: Americas, EMEA, Japan

CONTACT INFORMATION

Americas
2211 S 47th Street
Phoenix, Arizona 85034
United States of America
eval.kits@avnet.com
1-800-585-1602

Europe (Silica)
Gruber Str. 60c
85586 Poing
Germany
marketing@silica.com
+49-8121-77702

Europe (EBV)
Im Technologypark 2-8
85586 Poing
Germany
<http://ebv.com/contact>

Japan
Yebisu Garden Place Tower, 23F
4-20-3 Ebisu, Shibuya-ku
Tokyo 150-6023 Japan
eval-kits-jp@avnet.com
+81-(0)3-5792-8210