

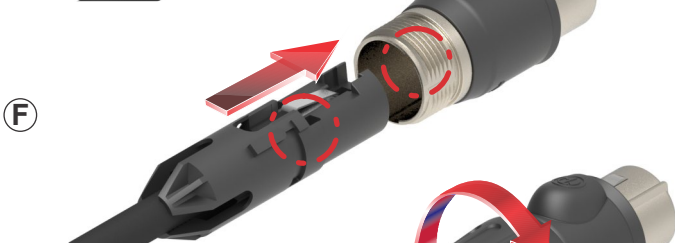
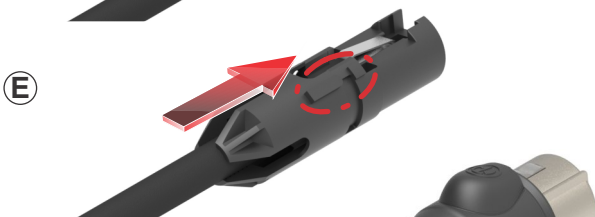


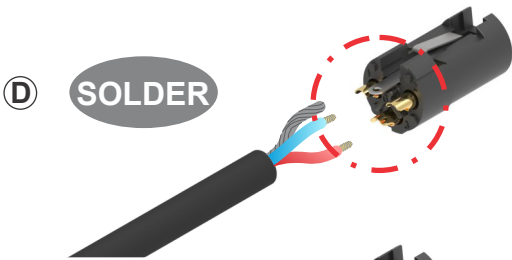

ASSEMBLY INSTRUCTION

NC3FX-TOP & NC5FX-TOP | XLR Cable Connector

IP65 RATED AND UL50E APPROVED.

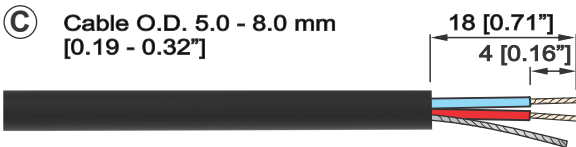


A Cut cable end approx. 45°.

B Slide the bushing over the cable.

To ease the boot assembly apply some cable pulling lubricant to the cable ends.

C Prepare cable as shown.

D Insert wires into the terminals and **SOLDER** them.

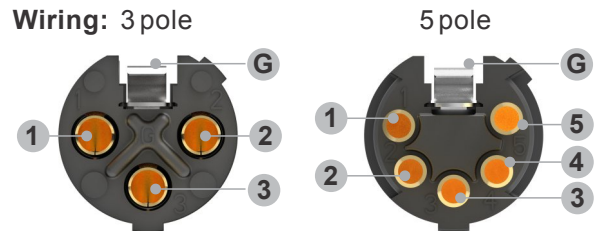

E Put chuck onto the cable.


Attention: Pay attention to the guiding key.

F Slide insert and chuck together into the housing.

Important: Align the insert by positioning as shown.

G Finish the installation by turning the bushing onto the connector.

Attention: Screw the bushing to the end of the thread.

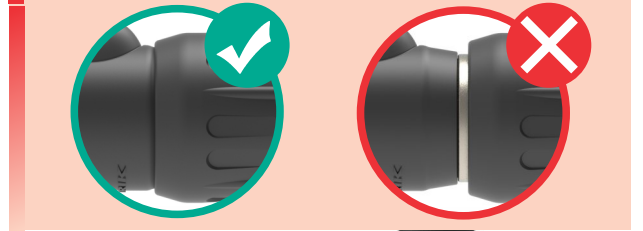

FINISHED



NEUTRIK AG LI T: +423/237 24 24 F: +423/232 53 93
 NEUTRIK USA Inc. USA T: +1 704 / 972 3050 F: +1 704/438 9202
 NEUTRIK (UK) Ltd. UK T: +44 1983 / 811 441 F: +44 1983/811 439
 NEUTRIK Vertriebs GmbH DE/NL/AT/DK T: +49 8131 / 280 890 F: +49 8131/280 830

NEUTRIK France FR T: +33 1/4131 6750 F: +33 1/4131 0511
 NEUTRIK Tokyo Ltd. JP T: +81 3/3663 4733 F: +81 3/3663 4796
 NEUTRIK Hong Kong Ltd. HK T: +852/2687 6055 F: +852/2687 6052
 NEUTRIK India Pvt. Ltd. IND T: +91/982 05 43 424 F: +91/22 26163 540

Draft. Nr.: BDA 549 | Update: 06.09.2018 | Data subject to change without prior notice. ©2018 NEUTRIK®. ALL RIGHTS RESERVED. NEUTRIK® is a registered trademark.

www.neutrik.com

