

## XZCRA151164D5

jumper cable XZ - male straight M12 5-pin - female straight M12 5-pin - PVC 5m



### Main

|                                    |                   |
|------------------------------------|-------------------|
| Accessory / separate part category | Cabling accessory |
| Accessory / separate part type     | Jumper cable      |

### Complementary

|                                |  |
|--------------------------------|--|
| Jumper cable end 1             | M12 male, :5 pins (straight), fixing: screw-on and clip-on   |
| Jumper cable end 2             | M12 female, :5 pins (straight), fixing: screw-on and clip-on |
| Collar material                | Metal  |
| Cable composition              | 5 x 0.34 mm <sup>2</sup>                                     |
| Cable length                   | 5 m  |
| Cable outer diameter           | 5.7 mm   |
| [Ue] rated operational voltage | 250 V AC<br>300 V DC   |
| [In] rated current             | 4 A  |
| Insulation resistance          | >= 1000 MOhm   |
| Resistance across terminals    | <= 5000 mOhm   |
| Product weight                 | 0.26 kg  |

### Environment

|                                       |                      |
|---------------------------------------|----------------------|
| IP degree of protection               | IP69K                |
| ambient air temperature for operation | -25...85 °C (static) |


### Offer Sustainability

|                          |   |
|--------------------------|---|
| Sustainable offer status | Not Green Premium product   |
| RoHS (date code: YYWW)   | Compliant - since 0601 - Schneider Electric declaration of conformity |

### Contractual warranty

|                 |           |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

### Dimensions

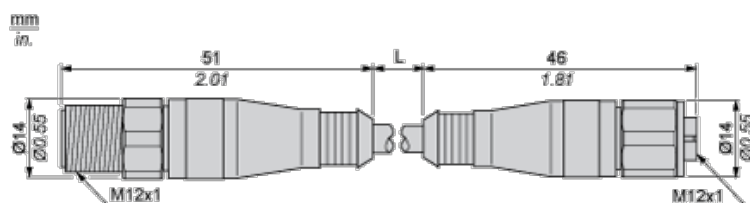

L : Length of cable

### Connections and Schemes

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

