


Mixed Signal Oscilloscope with Logical Analyser

multicomp PRO

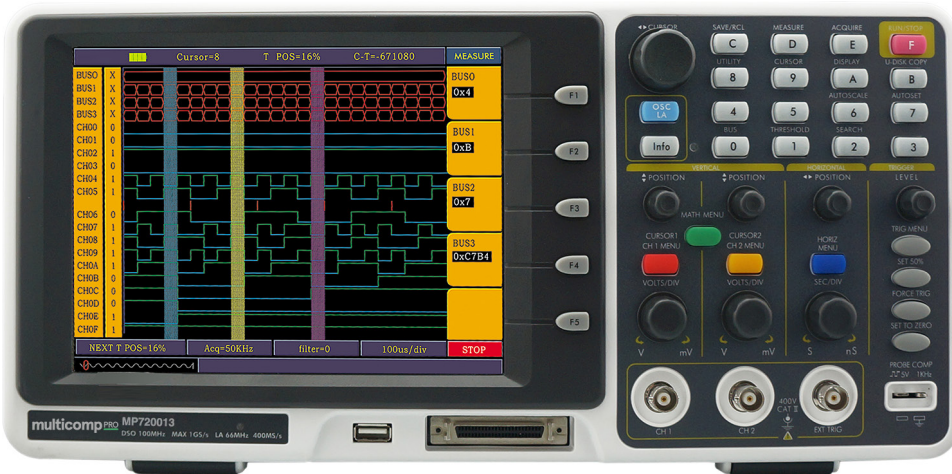

Features

- 2 in 1 (DSO + LA)
- 8" LCD Display
- USB data transmission supported
- 20 automatic measurements

Digital Storage Oscilloscope

Bandwidth : 100MHz
Sample rate : up to 1GS/s

Logic Analyser

Bandwidth : 100MHz
Sample rate : Max. 1GS/s
16 input channels

Oscilloscope Specifications

Bandwidth	100MHz
Sample Rate (real time)	1GS/s
Rise Time	≤3.5ns
Display	8" colour LCD, 640 × 480 pixels
Channel	2 Analogue + 1 Ext Trigger
Horizontal Scale (s/div)	2ns/div ~ 100s/div, step by 1~2~5
DC Accuracy (average)	Average>16 : ±(3% reading + 0.05div) for ΔV
Vertical Sensitivity	2mV/div - 10V/div
DC Gain Accuracy	±3%
Vertical Resolution (A/D)	8 bits (2 channels simultaneously)
Interpolation	sin (x) / x
Max Input Voltage	400V (DC + AC, PK - PK)
Probe Attenuation Factor	1X, 10X, 100X, 1000X
Trigger Mode	Edge, Video, Alternate, Pulse and Slope
Acquisition Mode	Normal, Peak Detect, and Average
Record Length	2M points
Waveform Storage	4 waveforms

Newark.com/exclusive-brands
Farnell.com/exclusive-brands
Element14.com/exclusive-brands

multicomp PRO

Mixed Signal Oscilloscope with Logical Analyser

multicomp PRO

20 Automatic Measurements	Vpp, Vavg, Vrms, Freq, Period, Vmax, Vmin, Vtop, Vbase, Vamp, Overshoot, Preshoot, Rise Time, Fall Time, Delay A→B \int , Delay A→B \int +Width, -Width, +Duty, -Duty	
Waveform Math	+, -, ×, ÷, invert, FFT	
Lissajous Figure	Bandwidth	100MHz
	Phase Difference	±3 degrees
Communication Interface	USB host, VGA (optional), and USB device	
Fuse	1A, T class, 250V	
Battery	7.4V 8000mAh (optional)	
Dimensions (W × H × D)	370mm × 180mm × 120mm	
Weight (without package)	1.5 kg	
Power Supply	100V AC to 240V AC, 50Hz / 60Hz, CAT II	
Power Cord plug type	UK / EU	
Standard Accessories Included	LA Module, Power cord, USB cable, CD-Rom.Manual, Probes, Probe Adjust Tool	
Optional Accessories	Soft bag	
Warranty	12 months	

Logic Analyser

Performance Specifications

Sample Rate (real time)	20S/s - 1GS/s
Bandwidth	100MHz
Channel	16 Digital
Record Length	4M points
Input Impedance	660KΩ ± 5%, in parallel with 15 ± 5pF
Trigger Mode	Edge, Bus, State, Data Alignment, Data Width, and Distributed Queue
Trigger Position Setting	Pre-trigger, Mid-trigger, and Re-trigger
Threshold Voltage	±6V (4 settings)
Input Signal Range	±30V
Data Search	Available
Data System	Binary, Decimal, and Hex
Digital Filter	0, 1, 2 optional
Setting Storage	10 settings
USB Flash Disk Storage	Available

Part Number Table

Description	Part Number
Mixed Signal Oscilloscope, 2+16 Channels, 100MHz	MP720013 EU-UK

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/exclusive-brands
Farnell.com/exclusive-brands
Element14.com/exclusive-brands

multicomp PRO