

General Purpose Transistor multicomp^{PRO}



Pin Configuration

1. Emitter
2. Base
3. Collector

Features:

- PNP Silicon Planar RF Transistor
- Small Signal General Purpose Amplifier, Transistor

Absolute Maximum Ratings:

($T_a = 25^\circ\text{C}$ unless otherwise specified)

Characteristic	Symbol	Value	Unit
Collector Base Voltage	V_{CBO}	80	V
Collector-Emitter Voltage	V_{CEO}		
Emitter-Base Voltage	V_{EBO}	5	
Collector Current	I_{CM}	1	A
Power Dissipation at $T_a = 25^\circ\text{C}$ Derate above 25°C	P_{D}	800	mW
		4.6	mW/ $^\circ\text{C}$
Power Dissipation at $T_c = 25^\circ\text{C}$ Derate above 25°C		4	W
		22.85	mW/ $^\circ\text{C}$
Operating and Storage Temperature Range	T_j, T_{stg}	-65 to +200	$^\circ\text{C}$

General Purpose Transistor **multicomp** PRO

Electrical Characteristics:

(T_a = +25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Max.	Unit
Collector Emitter Breakdown Voltage	BV _{CEO} *	I _C = 10mA, I _B = 0	80	-	V
Collector Base Breakdown Voltage	BV _{CBO}	I _C = 10μA, I _E = 0			
Emitter Base Breakdown Voltage	BV _{EBO}	I _E = 10μA, I _C = 0			
Collector Leakage Current	I _{CBO}	V _{CB} = 60V, I _E = 0	-	50	nA
		V _{CB} = 60V, T _A = 150°C			μA
Emitter Leakage Current	I _{EBO}	V _{EB} = 5V, I _C = 0		10	μA
Collector Emitter Saturation Voltage	V _{CE(Sat)} *	I _C = 150mA, I _B = 15mA	-	0.15	V
		I _C = 500mA, I _B = 50mA		0.5	
Base Emitter Saturation Voltage	V _{BE(Sat)} *	I _C = 150mA, I _B = 15mA		0.9	
Base Emitter On Voltage	V _{BE(on)} *	I _C = 500mA, V _{CE} = 0.5V		1.1	
DC Current Gain	h _{FE} *	I _C = 100mA, V _{CE} = 5V	75	300	-
		I _C = 100mA, V _{CE} = 5V	100		
		I _C = 100mA, V _{CE} = 5V, T _a = -55°C	40		
		I _C = 1A, V _{CE} = 5V	25		


Small Signal Characteristics

Transition Frequency	f _T	I _C = 50mA, V _{CE} = 10V, f = 100MHz	150	500	MHz
Output Capacitance	C _{ob}	V _{CB} = 10V, I _E = 0, f = 1MHz	-	20	pF
Input Capacitance	C _{ib}	V _{BE} = 0.5V, I _C = 0, f = 1MHz		110	
Turn on Time	t _{on}	I _C = 500mA, I _{B1} = 50mA		100	ns
Storage Time		I _C = 500mA, I _{B1} = I _{B2} = 50mA	350		
Fall Time	t _f	I _C = 500mA, I _{B1} = I _{B2} = 50mA	50		

*Pulse Test: Pulse Width ≤300μs, Duty Cycle ≤2%


General Purpose Transistor **multicomp**PRO

TO-39 Metal Can Package

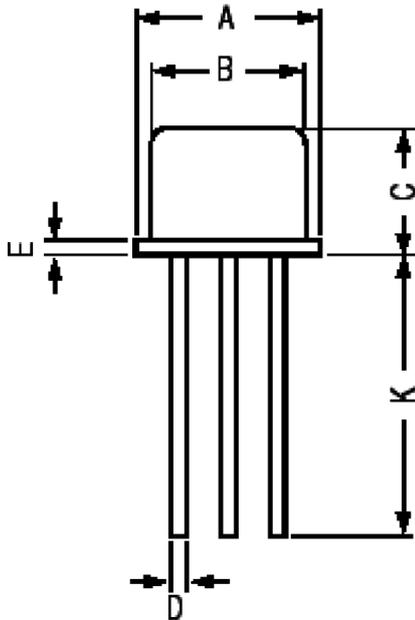

Dim.	Min.	Max.
A	8.5	9.39
B	7.74	8.5
C	6.09	6.6
D	0.4	0.53
E	-	0.88
F	2.41	2.66
G	4.82	5.33
H	0.71	0.86
J	0.73	1.02
K	12.7	-
L	42°	48°

Dimensions : Millimetres

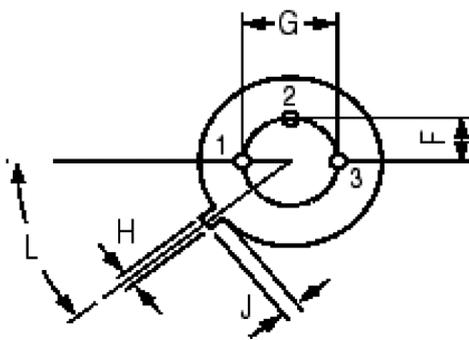

Pin Configuration

1. Emitter
2. Base
3. Collector

Part Number Table

Description	Part Number
Transistor, PNP, TO-39	2N4033

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
 Farnell.com/multicomp-pro
 Element14.com/multicomp-pro

multicompPRO