

Schottky Diode SOD-123

multicomp **PRO**



RoHS
Compliant

Features:

- Low forward voltage drop
- Fast switching time
- Surface mount package ideally suited for automatic insertion

Mechanical Data

Case	: SOD-123, plastic
Terminals	: Solderable per MIL-STD-202, Method 208
Polarity	: Cathode band
Weight	: 0.01g (Approximately)

Maximum Ratings and Electrical Characteristics

Rating at 25°C Ambient Temperature Unless Otherwise Specified.

Characteristic	Symbol	Rating	Units
Repetitive Peak Reverse Voltage	V _{RRM}	30	V
Forward DC Current at T _{amb} = 25°C	I _F	200	mA
Repetitive Peak Forward Current at t _p <1s, T _{amb} = 25°C (1)	I _{FRM}	500	mA
Surge Forward Current at t _p <10ms, T _j = 25°C (1)	I _{FSM}	4	A
Power Dissipation at T _{amb} = 65°C (1)	P _{tot}	200	mW
Thermal Resistance Junction to Ambient Air (1)	R _{θJA}	300	°C/W
Operating Temperature Range	T _j	-55 to +125	°C
Storage Temperature Range	T _{STG}	-55 to +150	°C

Characteristic	Symbol	Min.	Typ.	Max.	Units
Reverse Breakdown Voltage (I _R = 101uAdc Pulsed)	V _{(BR)R}	30	-	-	V
Forward Voltage (2) I _F = 200mA DC I _F = 10mA DC I _F = 50mA DC I _F = 2mA DC I _F = 15mA DC	V _F	0.26		1 0.4 0.65 0.33 0.45	V
Leakage Current (2) (V _R = 25V DC) (V _R = 25V DC, T _J = 100°C)	I _R			0.5 100	μA
Capacitance (V _R = 1.0, f = 1.0MHz)	C _{tot}	-	7	-	pF
Reverse Recovery Time(I _F = 10mA, I _R = 10mA) (I _{rr} = 1.0mA, R _L = 100Ω)	t _{rr}	-	-	5	nS

Notes: 1. Valid Provided that Terminals are Kept at Ambient Temperature.
2. Pulse Test t_p<300μs, Duty Cycle<2%

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicomp **PRO**

Schottky Diode SOD-123

Fig. 1 – Admissible Power Dissipation vs. Ambient Temperature

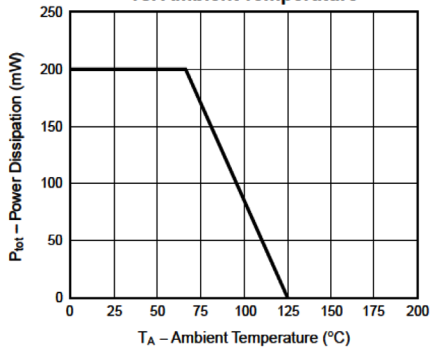


Fig. 2 – Typical Reverse Characteristics

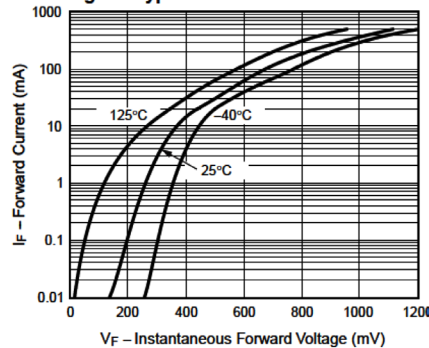


Fig. 3 – Typical Reverse Characteristics



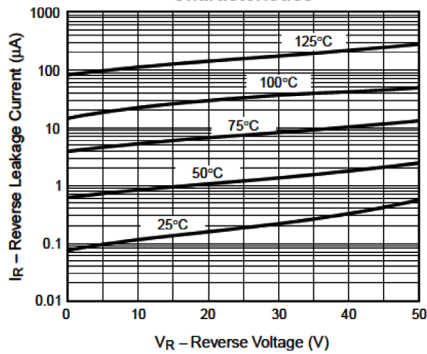


Fig. 4 – Typical Capacitance vs. Reverse Applied Voltage

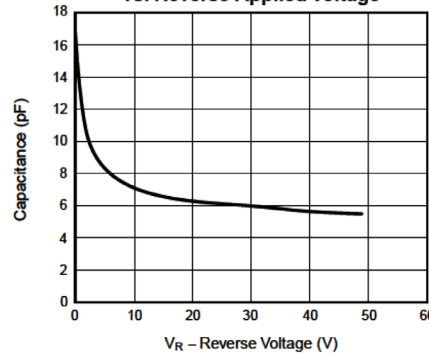

Dimension:

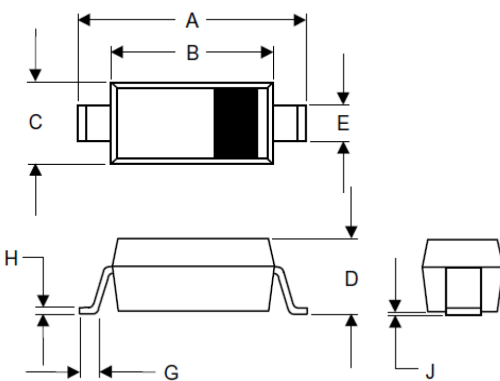

SOD-123		
Dim.	Min.	Max.
A	3.55	3.85
B	2.55	2.85
C	1.4	1.8
D	-	1.35
E	0.3	0.78
G	0.15	-
H	-	0.25
J	-	0.15

Dimensions : Millimetres

Part Number Table

Description	Part Number
Diode, Schottky, SOD-123	BAT42W+

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.