

Benötigte Hilfsmittel:

Klemmwerkzeug 1A
Stanley Messer, Schere

Gerade Verbinder für flexible Kabel

Kabeleinführung: SUHNER Voll-Klemmung

Verbinder Typen: (z.B.)

11 QLA-01-2-8c
11 QLA-01-2-9c

Dieser Verbinder
wird in 3 losen Teilen
geliefert.

Geeignete Kabel:

RG 188 A/U
G 02232
K 02252d

RG 316/U

Innenleiter: fest




Aussparung 1

Aussenleiter:


Aussparung A

Klemmwerkzeug:


1A rot




Hülse A über Kabel schieben,
Kabel gemäss Skizze abisolieren,
Abschirmung nicht beschädigen.

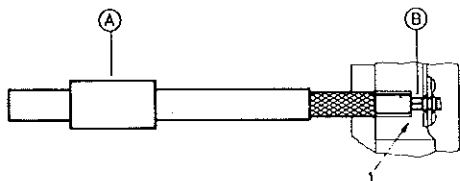

Kabelinnenleiter in B einführen und mit Einsatz 1 klemmen.

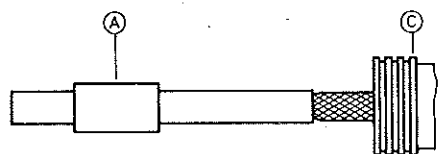

Abschirmung leicht aufspreizen.
Vorbereitetes Kabel in Gehäuse C bis zum Anschlag
einführen.
Abschirmung muss über Klemmhals liegen.

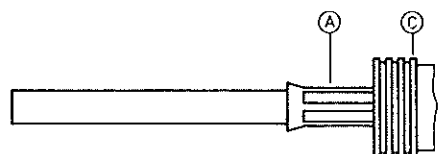

Hülse A über die Abschirmung schieben
und möglichst nahe am Gehäuse C klemmen.

SUHNER verfügt über gut ausgebildete Fachkräfte und rationelle Einrichtungen zur Herstellung kompletter HF-Verbindungsleitungen. Wir montieren Ihre Verbinder zu wirtschaftlichen Preisen! Wenden Sie sich an unsere Vertreter.



HUBER+SUHNER AG

CH-9100 HERISAU

for English text see overleaf

Tools and materials required:

Crimp tool 1A
Stanley blade, scissors

Straight connector for flexible cable

Cable entry: SUHNER Full-Crimp

Connector types: (e.g.)

11 QLA-01-2-8c
11 QLA-01-2-9c

This connector
is supplied
in 3 parts

Suitable cables e.g.:

RG 188 A/U
G 02232
K 02252d

RG 316/U

Centre contact/capt.:





cavity 1

Braid:


cavity A

Crimp tool:


1A red

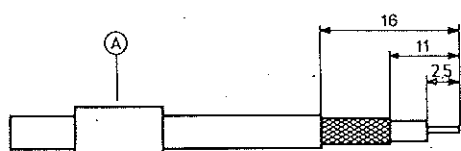


Slide ferrule A onto cable, strip cable according to diagram.
Do not damage braid.

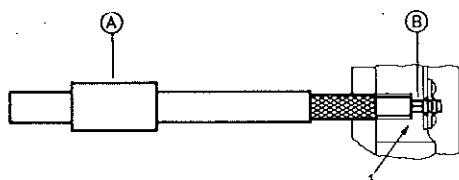


Insert inner conductor of cable into B
and crimp with insert 1.

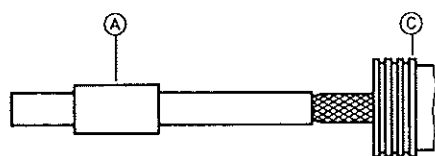

Splay out braid.
Insert centre contact B into connector body C as far as stop.
Ensure that braid lies above the crimp neck.

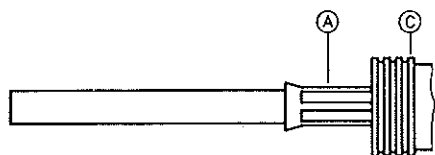

Slide ferrule A over braid and crimp
as close to connector body C as possible.



SUHNER's skilled staff and specialised equipment are available to carry out complete R. F. lead-assembly on your behalf.
We mount your connectors on cables at economic prices! Please contact our representative for further details of this service.



HUBER+SUHNER LTD. CH-9100 HERISAU