

Solar Powered Wireless WiFi Weather Station


pro-SIGNAL

The Solar Powered Wireless WiFi Weather Station. The following user guide provides step by step instructions for installation, operation and troubleshooting.

RoHS
Compliant



Screen Display

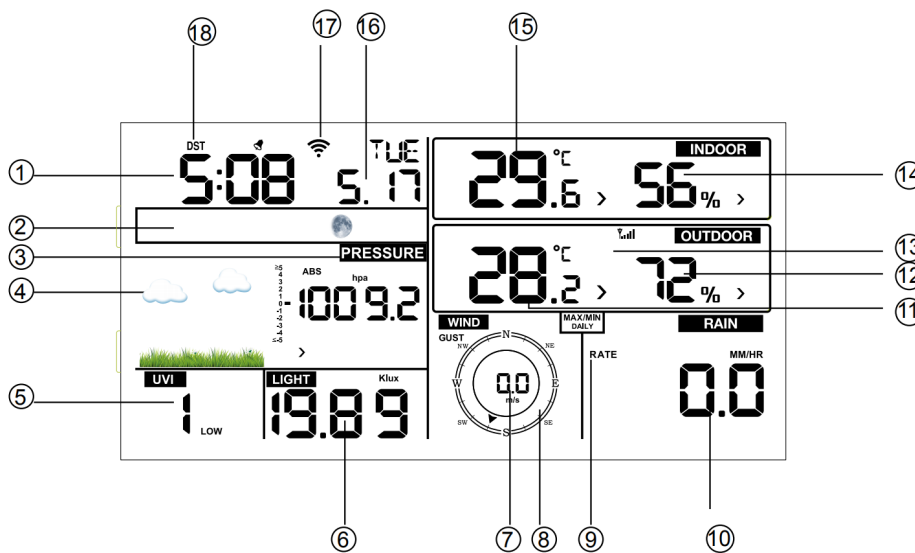

1. Time	10. Rain fall
2. Moon phase	11. Outdoor temperature
3. Barometric Pressure	12. Outdoor humidity
4. Weather forecast	13. RF icon
5. UV index	14. Indoor humidity
6. Light	15. Indoor temperature
7. Wind speed	16. Date
8. Wind direction	17. WIFI icon
9. MAX/MIN Daily	18. DST

Newark.com/exclusive-brands
Farnell.com/exclusive-brands
Element14.com/exclusive-brands

pro-SIGNAL

Solar Powered Wireless WiFi Weather Station

pro-SIGNAL

Specification

Outdoor data

Transmission distance in open field	: 100m (300 feet)
Frequency	: 868MHz
Temperature range	: -40°C to 60°C (-40°F to +140°F)
Accuracy	: ±1°C
Resolution : 0.1°C	
Measuring range rel. humidity	: 10% to 99%
Accuracy	: ±5%
Rain volume display	: 0mm to 6000mm (show --- if outside range)
Accuracy	: ±10%
Resolution	: 0.1mm (if rain volume < 1000mm) 1mm (if rain volume > 1000mm)
Wind speed	: 0m/s to 50m/s (0mph to 100mph) (show --- if outside range)
Accuracy	: ±1m/s (wind speed < 5m/s) +/-10% (wind speed > 5m/s)
Light	: 0k Lux to 200k Lux
Accuracy	: ±15%
Measuring interval thermo-hygro sensor	: 16 s

Indoor data

Indoor temperature range	: 0°C to 50°C (32°F to +122°F) (show --- if outside range)
Resolution	: 0.1°C
Measuring range rel. Humidity	: 10% to 99%
Resolution	: 1%
Measuring range air pressure	: 700hPa to 1100hPa (20.67inHg to 32.5inHg)
Accuracy	: ±3hpa
Resolution	: 0.1hPa (0.01inHg)
Alarm duration	: 120 sec
Measuring interval indoor data	: 60s

Power consumption

Base station	: 5V DC adaptor (included),
Power Consumption configuration mode)	: 0.5 Watts (1.25 Watts during WiFi)
Base station	: 3 × AAA batteries (not included)
Remote sensor	: 2 × AA batteries (not included)

The primary power source is the solar panel. The batteries provide backup power when there is limited solar energy.

Part Number Table

Description	Part Number
Solar Powered Wireless WiFi Weather Station, 100m	PSG04173

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. pro-SIGNAL is the registered trademark of Premier Farnell Limited 2019.

Newark.com/exclusive-brands
Farnell.com/exclusive-brands
Element14.com/exclusive-brands

pro-SIGNAL