

# R&S®RT-Zxx

## HIGH VOLTAGE AND CURRENT PROBES

Specifications



Data Sheet | Version 22.00

**ROHDE & SCHWARZ**

Make ideas real



## CONTENTS

Definitions.....	3
Probe/oscilloscope chart.....	4
R&S®RT-ZH03 high voltage passive probe.....	6
R&S®RT-ZH10/-ZH11 high voltage passive probes .....	9
R&S®RT-ZI10(C)/-ZI11 isolated probes .....	12
R&S®RT-ZD002/-ZD003 high voltage differential probes .....	16
R&S®RT-ZD01 high voltage differential probe.....	19
R&S®RT-ZD02/-ZD08 high voltage differential probes .....	22
R&S®RT-ZHD07 high voltage differential probe .....	24
R&S®RT-ZHD15/-ZHD16 high voltage differential probe.....	29
R&S®RT-ZHD60 high voltage differential probe .....	33
R&S®RT-ZC02/-ZC03 current probes .....	36
R&S®RT-ZC05B/-ZC10(B)/-ZC15B/-ZC20(B)/-ZC30 current probes .....	40
R&S®RT-ZC31 current probe.....	45
R&S®RT-ZA13 probe power supply .....	48
Ordering information.....	49

## Definitions

### General

Product data applies under the following conditions:

- Three hours storage at ambient temperature followed by 30 minutes warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to

### Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as  $<$ ,  $\leq$ ,  $>$ ,  $\geq$ ,  $\pm$ , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

### Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

### Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with  $<$ ,  $>$  or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

### Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

Typical data as well as measured values are not warranted by Rohde & Schwarz.

## Probe/oscilloscope chart

Base unit: R&S®	Probe interface	RTC1000	RTB2000	RTM3000	RTA4000	RTE	RTO	RTP	RTH	RT-ZA9	RT-Z1M	Page
Probe: R&S®												
Passive probes												
RT-ZH03	BNC, 1 MΩ	●	●	●	●	●	●				●	6
RT-ZH10	BNC, 1 MΩ, readout	○	○	●	●	●	●				●	9
RT-ZH11		○	○	●	●	●	●				●	9
RT-ZI10									●			12
RT-ZI10C									●			12
RT-ZI11									●			12
Differential probes												
RT-ZD002	BNC, 1 MΩ	●	●	○	○	○	○				○	16
RT-ZD003		●	●	○	○	○	○				○	16
RT-ZD01		●	●	●	●	●	●				●	19
RT-ZD02	BNC, 50 Ω <sup>1</sup>			●	●	●	●	●		●		22
RT-ZD08				●	●	●	○	●		●		22
RT-ZHD07	Rohde & Schwarz, 1 MΩ			●	●	●	●				●	24
RT-ZHD15				●	●	●	●				●	29
RT-ZHD16				●	●	●	●				●	29
RT-ZHD60				●	●	●	●				●	33

<sup>1</sup> Probe requires 50 Ω input coupling. It can be attached to oscilloscopes with 1 MΩ input coupling using a BNC feedthrough termination adapter.


Base unit: R&S®	Probe interface	RTC1000	RTB2000	RTM3000	RTA4000	RTE	RTO	RTP	RTH	RT-ZA9	RT-Z1M	Page
Probe: R&S®												
Current probes												
RT-ZC02	BNC, 1 MΩ	●	●	○	○	○	○		●		○	24
RT-ZC03		●	●	○	○	○	○		●		○	24
RT-ZC10		●	●	○	○	○	○		○		○	39
RT-ZC20		●	●	○	○	○	○		○		○	39
RT-ZC30		●	●	●	●	●	●		○		●	39
RT-ZC31		●	●	●	●	●	●		○		●	45
RT-ZC05B	Rohde & Schwarz, 1 MΩ			●	●	●	●				●	39
RT-ZC10B				●	●	●	●				●	39
RT-ZC15B				●	●	●	●				●	39
RT-ZC20B				●	●	●	●				●	39

- recommended extra
- possible accessory, with limited functionality of probe or base unit

## R&S®RT-ZH03 high voltage passive probe

All parameters are valid when the probe is connected to an appropriate Rohde & Schwarz oscilloscope with an input impedance of 1 M $\Omega$ . See table on page 4 and Rohde & Schwarz oscilloscope operating manual for more details.

		R&S®RT-ZH03
<b>Step response</b>		
Rise time	system, 10 % to 90 %	1.4 ns (meas.)
<b>Frequency response</b>		
Bandwidth	system, -3 dB, starting at DC	> 250 MHz (meas.)
<b>Input impedance</b>		
DC input resistance	system	100 M $\Omega$
Input capacitance	system	6.5 pF (meas.)
<b>DC characteristics</b>		
Attenuation	system, automatically corrected on base unit display	100:1
Attenuation error	probe only, with ideal 1 M $\Omega$ load impedance	$\pm 2$ % (meas.)
Attenuation voltage coefficient		$\pm 0.0025$ %/V (meas.)
<b>Maximum rated input voltage</b>		
Continuous voltage	derated, see figure on page 7	850 V (RMS)
Transient overvoltage		$\pm 1200$ V
<b>Base unit</b>		
Input capacitance	must be compensated by probe's LF compensation	10 pF to 50 pF
Input coupling		1 M $\Omega$ AC/DC

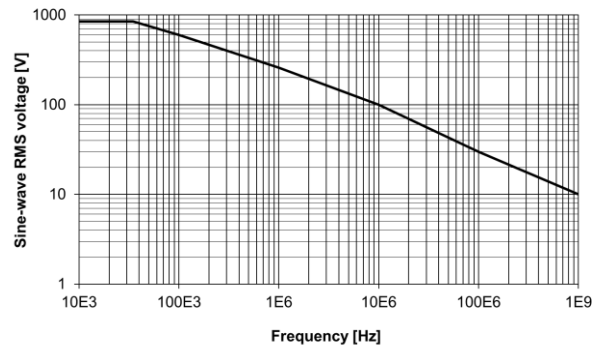

*R&S®RT-ZH03 maximum rated sine-wave root mean square voltage versus frequency*

## General data


<b>Temperature</b>		
Temperature loading	operating temperature range	0 °C to +40 °C
Climatic loading		80 % relative humidity without condensation
Altitude	operation	up to 2000 m
<b>Safety</b>		in line with Low Voltage Directive 2006/95/EC, IEC/EN 61010-31 (pollution degree 2)
<b>RoHS</b>		in line with EN50581
<b>Mechanical data</b>		
Dimensions	diameter of probe tip	approx. 5 mm (0.2 in)
	cable length	approx. 1.3 m (51 in)
Weight	probe only	approx. 55 g (0.12 lb)
<b>Probe interface</b>		
Connector		BNC




## R&S®RT-ZH10/-ZH11 high voltage passive probes

All parameters are valid when the probe is connected to an appropriate Rohde & Schwarz oscilloscope with an input impedance of 1 M $\Omega$ . See table on page 4 and Rohde & Schwarz oscilloscope operating manual for more details.


		R&S®RT-ZH10	R&S®RT-ZH11
<b>Step response</b>			
Rise time	system, 10 % to 90 %	900 ps (meas.)	
<b>Frequency response</b>			
Bandwidth	system, –3 dB, starting at DC	> 400 MHz	
<b>Input impedance</b>			
DC input resistance	system	50 MΩ ± 1 %	
Input capacitance	system	7.5 pF (meas.)	
<b>DC characteristics</b>			
Attenuation	system, automatically corrected on base unit display	100:1	1000:1
Attenuation error	probe only, with ideal 1 MΩ load impedance	±2 %	
Attenuation voltage coefficient		±0.0005 %/V (meas.)	
<b>Maximum rated input voltage</b>			
Continuous voltage	derated, see figures on page 10	1000 V (RMS), CAT II	
Transient overvoltage		±4000 V	
<b>Base unit</b>			
Input capacitance	must be compensated by probe's LF compensation	5 pF to 20 pF	
Input coupling		1 MΩ AC/DC	

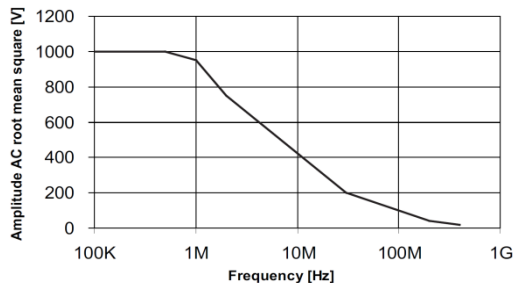


*R&S®RT-ZH10/-ZH11 maximum rated sine-wave root mean square voltage versus frequency, CAT I*

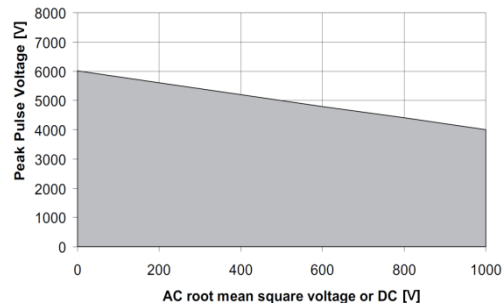

*R&S®RT-ZH10/-ZH11 maximum root mean square voltage versus peak pulse voltage, CAT I*

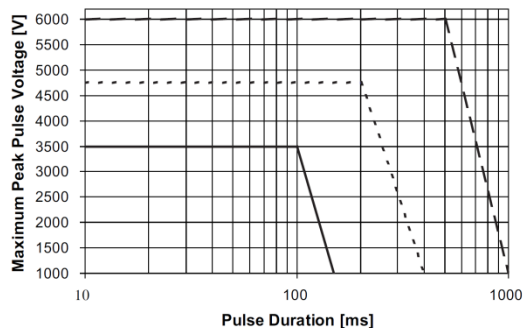

*R&S®RT-ZH10/-ZH11 maximum pulse derating, CAT I*

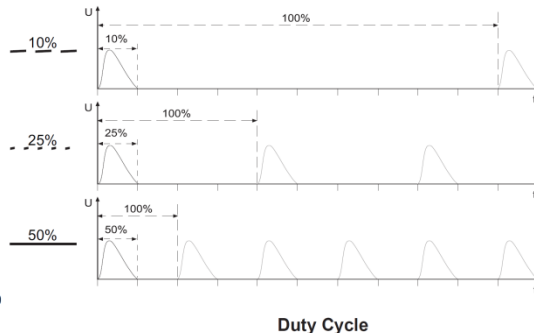

**General data**



<b>Temperature</b>		
Temperature loading	operating temperature range	0 °C to +50 °C
	storage temperature range	-40 °C to +70 °C
Climatic loading		80 % relative humidity for temperatures up to +31 °C, decreasing linearly to 40 % at +50 °C
Altitude	operation	up to 2000 m
	transport	up to 15000 m
<b>Safety</b>		in line with Low Voltage Directive 2006/95/EC, IEC/EN 61010-31 (pollution degree 2)
<b>RoHS</b>		in line with EN50581
<b>Mechanical data</b>		
Dimensions	diameter of probe tip	approx. 5 mm (0.2 in)
	cable length	approx. 2 m (79 in)
Weight	probe only	approx. 67 g (0.15 lb)
<b>Probe interface</b>		
Connector		BNC with readout

## R&S®RT-ZI10(C)/-ZI11 isolated probes

All parameters are valid when the probe is connected to an appropriate Rohde & Schwarz oscilloscope with an input impedance of 1 M $\Omega$ . The R&S RT-ZI10/-ZI11 must be used only with insulated oscilloscopes provided with touch-protected inputs. See table on page 4 and Rohde & Schwarz oscilloscope operating manual for more details.

		R&S®RT-ZI10	R&S®RT-ZI11
<b>Step response</b>			
Rise time	system, 10 % to 90 %	900 ps (meas.)	
<b>Frequency response</b>			
Bandwidth	system, −3 dB, starting at DC	> 500 MHz (meas.)	
<b>Input impedance</b>			
DC input resistance	system	10 MΩ ± 1 %	100 MΩ ± 1 %
Input capacitance	system	12 pF (meas.)	4.6 pF (meas.)
<b>DC characteristics</b>			
Attenuation	system	10:1	100:1
Attenuation error	system	±2 %	
Maximum rated input voltage	between probe tip and probe reference terminal derated, see figure on page 14	1000 V (RMS)	3540 V (RMS)
		1000 V (RMS), CAT III	
		600 V (RMS), CAT IV	
	between probe terminals and earth ground derated, refer to base unit manual	1000 V (RMS)	
<b>Base unit</b>			
Use with		R&S®RTH	
Input capacitance	must be compensated by probe's LF compensation	10 pF to 22 pF	10 pF to 25 pF
Input coupling		1 MΩ AC/DC	

		<b>R&amp;S®RT-ZI10C</b>
<b>Step response</b>		
Rise time	system, 10 % to 90 %	700 ps (meas.)
<b>Frequency response</b>		
Bandwidth	system, –3 dB, starting at DC	> 500 MHz (meas.)
<b>Input impedance</b>		
DC input resistance	system	10 M $\Omega$ $\pm$ 1 %
Input capacitance	system	11 pF (meas.)
<b>DC characteristics</b>		
Attenuation	system	10:1
Attenuation error	system	$\pm$ 2 %
Maximum rated input voltage	between probe tip and probe reference terminal derated, see figure on page 14	300 V (RMS), CAT III
	between probe terminals and earth ground derated, refer to base unit manual	300 V (RMS)
<b>Base unit</b>		
Use with		R&S®RTH
Input capacitance	must be compensated by probe's LF compensation	10 pF to 22 pF
Input coupling		1 M $\Omega$ AC/DC

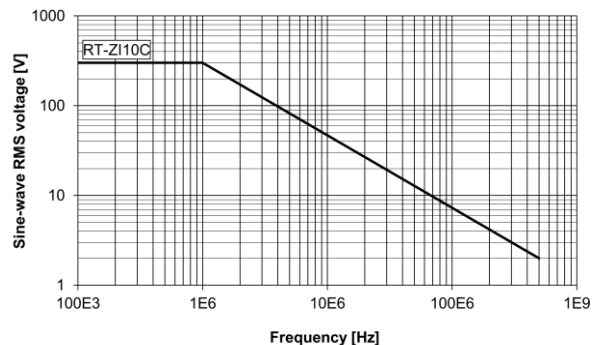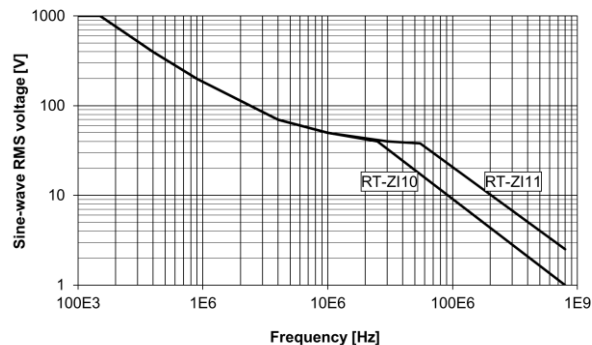

*R&S®RT-ZI10(C)/-ZI11 maximum rated sine-wave root mean square voltage between probe tip and probe reference terminal versus frequency (CAT III)*

**General data**


<b>Temperature</b>		
Temperature loading	operating temperature range	+5 °C to +40 °C
Climatic loading		80 % relative humidity for temperatures up to +31 °C, decreasing linearly to 40 % at +50 °C
Altitude	operation	up to 2000 m
<b>Safety</b>		in line with Low Voltage Directive 2006/95/EC, IEC/EN 61010-31 (pollution degree 2)
<b>RoHS</b>		in line with EN50581
<b>Mechanical data</b>		
Dimensions	diameter of probe tip	approx. 5 mm (0.2 in)
	diameter of reference terminal (R&S®RT-ZI10 and R&S®RT-ZI11 only)	approx. 2 mm (0.08 in)
	cable length	approx. 1.2 m (47 in)
Weight	probe only	approx. 75 g (0.17 lb)
<b>Probe interface</b>		
Connector		BNC, isolated

## R&S®RT-ZD002/-ZD003 high voltage differential probes

All parameters are valid when the probe is connected to an appropriate Rohde & Schwarz oscilloscope with an input impedance of 1 M $\Omega$ . See table on page 4 and Rohde & Schwarz oscilloscope operating manual for more details.

		R&S®RT-ZD002	R&S®RT-ZD003
<b>Step response</b>			
Rise time	10 % to 90 %	14 ns (meas.)	
<b>Frequency response</b>			
Bandwidth	–3 dB, starting at DC, calculated from 0.35/rise time	25 MHz	
Common mode rejection	DC to 100 Hz	86 dB (meas.)	80 dB (meas.)
	100 Hz to 20 kHz	66 dB (meas.)	60 dB (meas.)
<b>Input impedance</b>			
DC input resistance	differential (between signal sockets)	8 MΩ (meas.)	
	single-ended (each signal socket to ground)	4 MΩ (meas.)	
Input capacitance	differential (between signal sockets)	2.75 pF (meas.)	
	single-ended (each signal socket to ground)	5.5 pF (meas.)	
<b>DC characteristics</b>			
Attenuation	low/high attenuation	10:1, 100:1	20:1, 200:1
Attenuation error		±2 % (meas.)	±2 % (meas.)
Max. differential input	between signal sockets, low/high attenuation	±70 V, ±700 V	±140 V, ±1400 V
Operating voltage window	each signal socket to ground	±700 V	±1400 V
Zero error	referenced to probe output	±5 mV (meas.)	
Noise voltage	referenced to probe output	0.7 mV (RMS)	
<b>Maximum rated input voltage</b>			
Continuous voltage	derated, see figure, each signal socket to ground	1000 V (RMS), CAT III	
<b>Base unit</b>			
Input coupling		1 MΩ	



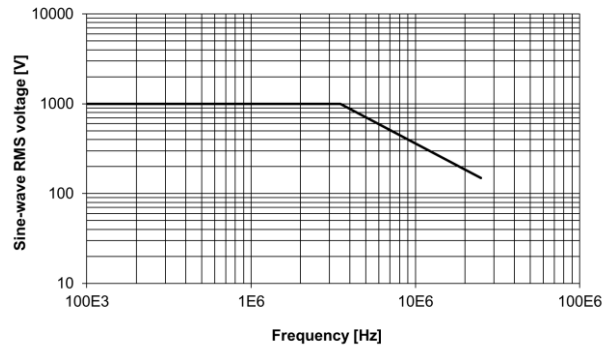

*Maximum rated sine-wave root mean square voltage versus frequency*

## General data


		R&S®RT-ZD002	R&S®RT-ZD003
<b>Temperature</b>			
Temperature loading	operating temperature range	-10 °C to +40 °C	
	storage temperature range, with battery removed	-30 °C to +70 °C	
Climatic loading		85 % relative humidity without condensation	
Altitude	operation	up to 2000 m	
<b>Safety</b>		in line with EN 61010-1	
<b>RoHS</b>		in line with EN 50581	
<b>EMC</b>		in line with EN 61326-1	
<b>Calibration interval</b>		2 years	
<b>Mechanical data</b>			
Dimensions	probe head (L × W × H)	approx. 170 mm × 63 mm × 21 mm (6.7 in × 2.5 in × 0.8 in)	
	length of probe cable	approx. 95 cm (37 in)	
	length of input leads	approx. 45 cm (18 in)	
Weight	probe only	approx. 400 g (0.88 lb)	
<b>Probe interface</b>			
Connector		BNC	
Input sockets		4 mm	
Supply voltage		4.5 V to 12 V, 360 mW	
Supply type		battery or USB adapter	
Battery type		4 times AA cells	

## R&S®RT-ZD01 high voltage differential probe

All parameters are valid when the probe is connected to an appropriate Rohde & Schwarz oscilloscope with an input impedance of 1 MΩ. See table on page 4 and Rohde & Schwarz oscilloscope operating manual for more details.

		R&S®RT-ZD01	
Attenuation setting		100:1	1000:1
Step response			
Rise time	10 % to 90 %	< 3.5 ns (meas.)	
Frequency response			
Bandwidth	starting at DC, calculated from 0.35/rise time	100 MHz	
Common mode rejection	DC to 100 Hz	80 dB (meas.)	
	100 Hz to 1 MHz	50 dB (meas.)	
Input impedance			
DC input resistance	differential (between signal sockets)	8 MΩ	
	single-ended (each signal socket to ground)	4 MΩ	
Input capacitance	differential (between signal sockets)	3.5 pF (meas.)	
	single-ended (each signal socket to ground)	7 pF (meas.)	
DC characteristics			
Attenuation error		±2 %	
Zero error	referenced to probe input	±0.5 V (meas.)	±5 V (meas.)
Max. differential input	between signal sockets	±140 V	±1400 V
Operating voltage window	each signal socket to ground	±1400 V	
Noise voltage	referenced to probe input	90 mV (RMS) (meas.)	0.9 V (RMS) (meas.)

Maximum rated input voltage		
Continuous voltage	derated, see figure, each signal socket to ground	1000 V (RMS), CAT III
Base unit		
Input coupling		1 M $\Omega$ AC/DC

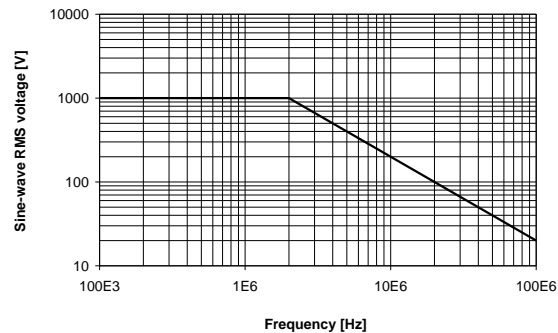

*Maximum rated sine-wave root mean square voltage versus frequency.*

## General data

<b>Temperature</b>		
Temperature loading	operating temperature range	0 °C to +40 °C
	storage temperature range	-30 °C to +70 °C
Climatic loading		85 % relative humidity
Altitude	operation	up to 2000 m
	transport	up to 4600 m
<b>EMC</b>		in line with EMC Directive 2004/108/EC, IEC/EN 61326-1, IEC/EN 61326-2-2
<b>Calibration interval</b>		2 years
<b>Safety</b>		in line with Low Voltage Directive 2006/95/EC, IEC/EN 61010-31 (pollution degree 2)
<b>RoHS</b>		in line with EN50581
<b>Mechanical data</b>		
Dimensions	probe head (L x W x H)	approx. 207 mm x 83 mm x 38 mm (8.1 in x 3.2 in x 1.5 in)
	length of input leads	approx. 30 cm (12 in)
	length of probe cable	approx. 90 cm (35 in)
Weight	probe only	approx. 500 g (1.1 lb)
<b>Probe interface</b>		
Connector		BNC
Input sockets		4 mm
Supply type		battery or USB adapter
Supply voltage		4.5 V to 12 V
Battery type		4 times AA cells

## R&S®RT-ZD02/-ZD08 high voltage differential probes

All parameters are valid when the probe is connected to an appropriate Rohde & Schwarz oscilloscope with an input impedance of 50  $\Omega$ . See table on page 4 and Rohde & Schwarz oscilloscope operating manual for more details.

		R&S®RT-ZD02	R&S®RT-ZD08
<b>Step response</b>			
Rise time	10 % to 90 %	1.75 ns (meas.)	437 ps (meas.)
<b>Frequency response</b>			
Bandwidth	–3 dB, starting at DC, calculated from 0.35/rise time	200 MHz	800 MHz
Common mode rejection	DC to 100 Hz	80 dB (meas.)	60 dB (meas.)
	100 Hz to 10 MHz	50 dB (meas.)	–
	100 Hz to 500 MHz	–	15 dB (meas.)
Noise voltage	referenced to probe input	2.6 mV (RMS) (meas.)	2.3 mV (RMS) (meas.)
<b>Input impedance</b>			
DC input resistance	differential (between signal sockets)	1 M $\Omega$ (meas.)	200 k $\Omega$ (meas.)
	single-ended (each signal socket to ground)	500 k $\Omega$ (meas.)	100 k $\Omega$ (meas.)
Input capacitance	differential (between signal sockets)	3.5 pF (meas.)	1 pF (meas.)
	single-ended (each signal socket to ground)	7 pF (meas.)	2 pF (meas.)
<b>DC characteristics</b>			
Max. differential input	between signal sockets	$\pm 20$ V	$\pm 15$ V
Operating voltage window	each signal socket to ground	$\pm 60$ V	$\pm 30$ V
Attenuation		10:1	10:1
Attenuation error	probe only, with ideal 50 $\Omega$ load impedance	$\pm 1$ % (meas.)	$\pm 2$ % (meas.)
Zero error	at probe output	$\pm 2$ mV (meas.)	$\pm 5$ mV (meas.)
Base unit input coupling		50 $\Omega$	
<b>Maximum rated input voltage</b>			
DC peak voltage	single-ended (each signal socket to ground)	$\pm 60$ V	$\pm 40$ V
AC peak voltage	single-ended (each signal socket to ground)	$\pm 60$ V	$\pm 40$ V

## General data

		R&S®RT-ZD02	R&S®RT-ZD08
<b>Temperature</b>			
Temperature loading	operating temperature range	+5 °C to +40 °C	
	storage temperature range, with battery removed	-20 °C to +70 °C	
Climatic loading		85 % relative humidity without condensation	
Altitude	operation	up to 3000 m	
	transport	up to 15,300 m	
<b>Safety</b>		in line with EN 61010-1	
<b>RoHS</b>		in line with EN50581	
<b>EMC</b>		in line with EN 61326-1	
<b>Calibration interval</b>		2 years	
<b>Mechanical data</b>			
Dimensions	probe head (L x W x H)	approx. 111 mm x 22 mm x 14 mm (4.3 in x 0.9 in x 0.6 in)	
	length of probe cable	approx. 1.2 m (47 in)	
	length of input leads	approx. 15 cm (6 in)	–
Weight	probe only	approx. 170 g (0.37 lb)	
<b>Probe interface</b>			
Connector		BNC	
Input sockets	diameter	4 mm (0.2 in)	0.635 mm (0.02 in)
	spacing	180 mm (7 in)	2.54 mm (0.1 in)
Supply voltage		4.5 V to 12 V	
Supply type		battery or USB adapter	
Battery type		9 V Alkaline battery	
Battery lifetime		7.5 h (meas.)	4.5 h (meas.)


## R&S®RT-ZHD07 high voltage differential probe

All parameters are valid when the probe is connected to an appropriate Rohde & Schwarz oscilloscope with an input impedance of 1 MΩ. See table on page 4 and Rohde & Schwarz oscilloscope operating manual for more details.

<b>Attenuation setting</b>		25:1	250:1
<b>Step response</b>			
Rise time	10 % to 90 %, both attenuations	< 2 ns	
<b>Frequency response</b>			
Bandwidth	starting at DC, calculated from 0.4/rise time	200 MHz	
Common mode rejection	DC to 60 Hz		
	+15 °C to +35 °C	> 80 dB	
	0 °C to +50 °C	> 75 dB	
	60 Hz to 1 kHz	70 dB (meas.)	65 dB (meas.)
	1 kHz to 1 MHz	55 dB (meas.)	55 dB (meas.)
	1 MHz to 50 MHz	35 dB (meas.)	20 dB (meas.)
<b>Input impedance</b>			
DC input resistance	differential (between signal sockets)	5 MΩ	
	single-ended (each signal socket to ground)	2.5 MΩ	
Input capacitance	differential (between signal sockets)	2.5 pF (meas.)	
	single-ended (each signal socket to ground)	5 pF (meas.)	
<b>DC characteristics</b>			
Attenuation error	after applying digital correction factors	±0.5 %	
Temperature drift, attenuation		±60 ppm/°C	
Zero error	after applying digital correction factors, referenced to probe input		
	+15 °C to +35 °C	±12.5 mV	±35 mV
	0 °C to +50 °C	±25 mV	±55 mV
Temperature drift, zero error	referenced to probe input	±0.75 mV/°C	±1.12 mV/°C
	referenced to probe output	±30 µV/°C	±4.5 µV/°C



Dynamic range			
Differential input	between signal sockets	±75 V	±750 V
Offset compensation range	in both attenuations	±1000 V	
Offset compensation error	offset compensation setting = 0 V	no additional error	
	offset compensation setting ≠ 0 V	±0.2 % of setting ±40 mV (meas.)	
Operating voltage window	each signal socket to ground	±750 V	
Noise voltage	referenced to probe input	12 mV (RMS) (meas.)	40 mV (RMS) (meas.)
Maximum rated input voltage			
Continuous voltage	derated, see figure, each signal socket to ground	300 V (RMS), CAT III	
		600 V (RMS), CAT II	
		600 V (RMS)	
Transient voltage	each signal socket to ground	±4500 V (peak)	
Base unit			
Input coupling		1 MΩ AC/DC	

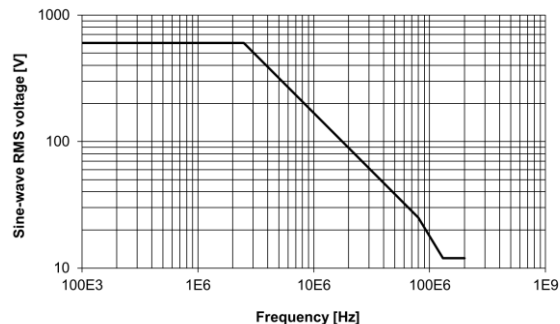

*Maximum rated sine-wave root mean square voltage versus frequency; each signal socket to ground*

## R&S®ProbeMeter

Specifications for measurement error apply only when offset compensation setting is 0 V. The R&S®ProbeMeter can be used to measure differential and common mode voltages.

Measurement error, differential mode and common mode	+15 °C to +35 °C 0 °C to +50 °C	±0.1 % of reading ±0.02 V ±0.2 % of reading ±0.04 V
Temperature drift		±60 ppm/°C of reading ±1 mV/°C
Common mode rejection, for differential measurement	+15 °C to +35 °C 0 °C to +50 °C	> 80 dB > 75 dB
50/60 Hz rejection		> 87 dB
Integration time		147 ms

**General data**

<b>Temperature</b>		
Temperature loading	operating temperature range	0 °C to +50 °C
	storage temperature range	-40 °C to +70 °C
Climatic loading		+25 °C/+40 °C cyclic at 95 % relative humidity without condensation, in line with IEC 60068-2-30
Altitude	operation	up to 3000 m
	transport	up to 4600 m
<b>Mechanical resistance</b>		
Vibration	sinusoidal	5 Hz to 150 Hz, max. 2 g at 55 Hz, 0.5 g from 55 Hz to 150 Hz, in line with EN 60068-2-6
	random	10 Hz to 500 Hz, acceleration 1.9 g (RMS), in line with EN 60068-2-64
Shock		40 g shock spectrum, in line with MIL-STD-810E
<b>EMC</b>		in line with EMC Directive 2014/30/EC, IEC/EN 61326-1 (table 2), IEC/EN 61326-2-1, CISPR 11/EN 55011(class B)
<b>Calibration interval</b>		2 years
<b>Safety</b>		in line with IEC/EN 61010-031
<b>RoHS</b>		in line with EN50581


<b>Mechanical data</b>		
Dimensions	probe amplifier box, without protector (W × H × L)	approx. 55 mm × 26 mm × 165 mm (2.17 in × 1.02 in × 6.5 in)
	cable length	approx. 1.3 m (52 in)
	overall length	approx. 1.6 m (63 in)
Weight	probe amplifier only	approx. 360 g (0.8 lb)
<b>Probe interface</b>		
Connector		Rohde & Schwarz probe interface
Input sockets		4 mm

## R&S®RT-ZHD15/-ZHD16 high voltage differential probe

All parameters are valid when the probe is connected to an appropriate Rohde & Schwarz oscilloscope with an input impedance of 1 MΩ. See table on page 4 and Rohde & Schwarz oscilloscope operating manual for more details.

Attenuation setting		50:1	500:1
Step response			
Rise time	10 % to 90 %, both attenuations		
	R&S®RT-ZHD15	< 4 ns	
	R&S®RT-ZHD16	< 2 ns	
Frequency response			
Bandwidth	starting at DC, calculated from 0.4/rise time		
	R&S®RT-ZHD15	100 MHz	
	R&S®RT-ZHD16	200 MHz	
Common mode rejection	DC to 60 Hz		
	+15 °C to +35 °C	> 80 dB	
	0 °C to +50 °C	> 75 dB	
	60 Hz to 1 kHz	70 dB (meas.)	65 dB (meas.)
	1 kHz to 1 MHz	55 dB (meas.)	55 dB (meas.)
	1 MHz to 50 MHz	35 dB (meas.)	20 dB (meas.)
Input impedance			
DC input resistance	differential (between signal sockets)	10 MΩ	
	single-ended (each signal socket to ground)	5 MΩ	
Input capacitance	differential (between signal sockets)	2 pF (meas.)	
	single-ended (each signal socket to ground)	4 pF (meas.)	

DC characteristics			
Attenuation error	after applying digital correction factors	±0.5 %	
Temperature drift, attenuation		±60 ppm/°C	
Zero error	after applying digital correction factors, referenced to probe input		
	+15 °C to +35°C	±25 mV	±65 mV
	0 °C to +50°C	±50 mV	±95 mV
Temperature drift, zero error	referenced to probe input	±1.5 mV/°C	±1.75 mV/°C
	referenced to probe output	±30 µV/°C	±3.5 µV/°C
Dynamic range			
Differential input	between signal sockets	±150 V	±1500 V
Offset compensation range	in both attenuations	±2000 V	
Offset compensation error	offset compensation setting = 0 V	no additional error	
	offset compensation setting ≠ 0 V	±0.2 % of setting ± 80 mV (meas.)	
Operating voltage window	each signal socket to ground	±1500 V	
Noise voltage	referenced to probe input, (RMS)		
	R&S®RT-ZHD15	20 mV (meas.)	70 mV (meas.)
	R&S®RT-ZHD16	25 mV (meas.)	80 mV (meas.)
Maximum rated input voltage			
Continuous voltage	derated, see figure, each signal socket to ground	1000 V (RMS), CAT III	
		1000 V (RMS)	
Transient voltage	each signal socket to ground	±6800 V (peak)	
Base unit			
Input coupling		1 MΩ AC/DC	

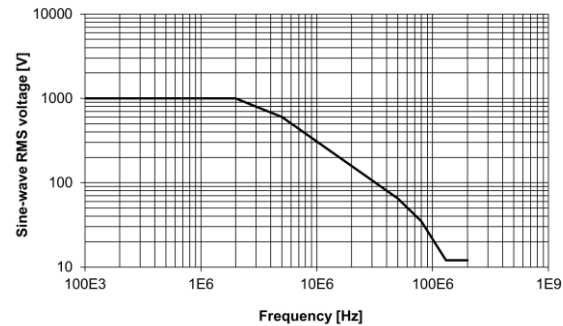

*Maximum rated sine-wave root mean square voltage versus frequency; each signal socket to ground*

## R&S®ProbeMeter

Specifications for measurement error apply only when offset compensation setting is 0 V. The R&S®ProbeMeter can be used to measure differential and common mode voltages.

Measurement error, differential mode and common mode	+15 °C to +35 °C	
	≤ 1000 V	±0.1 % of reading ±0.03 V
	> 1000 V	±0.1 % of reading ±0.03 V (meas.)
	0 °C to +50 °C	
	≤ 1000 V	±0.2 % of reading ±0.06 V
	> 1000 V	±0.2 % of reading ±0.06 V (meas.)
Temperature drift		±60 ppm/°C of reading ±1.5 mV/°C
Common mode rejection, for differential measurement	+15 °C to +35 °C	> 80 dB
	0 °C to +50 °C	> 75 dB
50/60 Hz rejection		> 87 dB
Integration time		147 ms

## General data

See page 27.




## R&S®RT-ZHD60 high voltage differential probe

All parameters are valid when the probe is connected to an appropriate Rohde & Schwarz oscilloscope with an input impedance of 1 M $\Omega$ . See table on page 4 and Rohde & Schwarz oscilloscope operating manual for more details.

Attenuation setting		100:1		1000:1			
Step response							
Rise time		10 % to 90 %, both attenuations		< 4 ns			
Frequency response							
Bandwidth		starting at DC, calculated from 0.4/rise time		100 MHz			
Common mode rejection		DC to 60 Hz					
		+15 °C to +35 °C		> 80 dB			
		0 °C to +50 °C		> 75 dB			
		60 Hz to 1 kHz		70 dB (meas.)		65 dB (meas.)	
		1 kHz to 1 MHz		55 dB (meas.)		55 dB (meas.)	
		1 MHz to 50 MHz		35 dB (meas.)		20 dB (meas.)	
Input impedance							
DC input resistance		differential (between signal sockets)		40 MΩ			
		single-ended (each signal socket to ground)		20 MΩ			
Input capacitance		differential (between signal sockets)		2 pF (meas.)			
		single-ended (each signal socket to ground)		4 pF (meas.)			
DC characteristics							
Attenuation error		after applying digital correction factors		±0.5 %			
Temperature drift, attenuation				±80 ppm/°C			
Zero error		after applying digital correction factors, referenced to probe input					
		+15 °C to +35°C		±70 mV		±150 mV	
		0 °C to +50°C		±150 mV		±230 mV	
Temperature drift, zero error		referenced to probe input		±5 mV/°C		±5.5 mV/°C	
		referenced to probe output		±50 μV/°C		±5.5 μV/°C	

Dynamic range			
Differential input	between signal sockets	±600 V	±6000 V
Offset compensation range	in both attenuations	±2000 V	
Offset compensation error	offset compensation setting = 0 V	no additional error	
	offset compensation setting ≠ 0 V	±0.2 % of setting ±100 mV (meas.)	
Operating voltage window	each signal socket to ground	±6000 V	
Noise voltage	referenced to probe input	70 mV (RMS) (meas.)	280 mV (RMS) (meas.)
Maximum rated input voltage			
Continuous voltage	derated, see figure, each signal socket to ground	1000 V (RMS), CAT III	
		1750 V (RMS)	
Transient voltage	each signal socket to ground	±6800 V (peak)	
Base unit			
Input coupling		1 MΩ AC/DC	

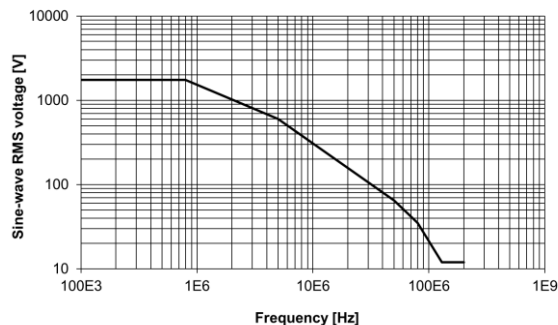

Maximum rated sine-wave root mean square voltage versus frequency; each signal socket to ground

## R&S®ProbeMeter

Specifications for measurement error apply only when offset compensation setting is 0 V. The R&S®ProbeMeter can be used to measure differential and common mode voltages.

Measurement error, differential mode and common mode	+15 °C to +35 °C	
	≤ 1000 V	±0.12 % of reading ±0.1 V
	> 1000 V	±0.12 % of reading ±0.1 V (meas.)
	0 °C to +50 °C	
	≤ 1000 V	±0.25 % of reading ±0.2 V
	> 1000 V	±0.25 % of reading ±0.2 V (meas.)
Temperature drift		±80 ppm/°C of reading ±4.5 mV/°C
Common mode rejection, for differential measurement	+15 °C to +35 °C	> 80 dB
	0 °C to +50 °C	> 75 dB
50/60 Hz rejection		> 87 dB
Integration time		147 ms

## General data

See page 27.

## R&S®RT-ZC02/-ZC03 current probes


All parameters are valid when the probe is connected to an appropriate Rohde & Schwarz oscilloscope with an input impedance of 1 M $\Omega$ . See table on page 4 and Rohde & Schwarz oscilloscope operating manual for more details.

		R&S®RT-ZC02	
Sensitivity setting		0.01 V/A	0.001 V/A
Step response			
Rise time	10 % to 90 %	20 µs (meas.)	
Frequency response			
Bandwidth	–3 dB, starting at DC	20 kHz (meas.)	
DC characteristics			
Dynamic range	derated, see figures on page 39	±200 A	±2000 A
Sensitivity error	+23 °C ±1 °C, ±1500 A	±1 % (meas.)	
	+23 °C ±1 °C, ±2000 A	±5 % (meas.)	
Temperature drift, sensitivity		±0.15 %/°C (meas.)	
Zero error	referenced to probe input after demagnetizing and zero adjustment	±100 mA (meas.)	±500 mA (meas.)
AC characteristics			
Maximum slew rate		±20 A/µs (meas.)	
Maximum rated input			
Maximum continuous current		1000 A (RMS)	
Maximum working voltage	for uninsulated conductors	300 V (RMS) CAT III	
Other			
Noise	with 20 MHz lowpass filter	30 mA (RMS) (meas.)	80 mA (RMS) (meas.)
Base unit			
Input coupling		1 MΩ	

		<b>R&amp;S®RT-ZC03</b>
<b>Step response</b>		
Rise time	10 % to 90 %	1 $\mu$ s (meas.)
<b>Frequency response</b>		
Bandwidth	–0.5 dB, starting at DC	100 kHz (meas.)
<b>DC characteristics</b>		
Dynamic range	derated, see figures on page 39	$\pm 30$ A
Sensitivity		0.1 V/A
Sensitivity error	+23 °C $\pm 1$ °C	$\pm 1$ % (meas.)
Temperature drift, sensitivity		$\pm 0.01$ %/°C (meas.)
Zero error	referenced to probe input after demagnetizing and zero adjustment	$\pm 2$ mA (meas.)
<b>AC characteristics</b>		
Maximum slew rate		$\pm 20$ A/ $\mu$ s (meas.)
<b>Maximum rated input</b>		
Maximum continuous current		20 A (RMS)
Maximum working voltage	for uninsulated conductors	300 V (RMS) CAT III
<b>Other</b>		
Noise	with 20 MHz lowpass filter	2 mA (RMS) (meas.)
<b>Base unit</b>		
Input coupling		1 M $\Omega$

**General data**

		R&S®RT-ZC02	R&S®RT-ZC03
Temperature			
Temperature loading	operating temperature range	0 °C to +50 °C	
	storage temperature range, with battery removed	-20 °C to +85 °C	
Climatic loading		80 % relative humidity for temperatures up to +31 °C, decreasing linearly to 40 % at +50 °C	
Altitude	operation	up to 2000 m	
Safety		in line with EN 61010-1 in line with EN 61010-2-032 (pollution degree 2)	
RoHS		in line with EN50581	
EMC		in line with EN 61326-2-2	
Calibration interval		2 years	
Mechanical data			
Dimensions	diameter of probe tip	approx. 32 mm (1.3 in)	approx. 25 mm (1.0 in)
	cable length	approx. 2.0 m (79 in)	
Weight	probe only	approx. 320 g (0.7 lb)	
Probe interface			
Connector		BNC	
Battery type		9 V Alkaline battery, PP3, MN 1604 or IEC6LR61	
Battery lifetime		50 h (meas.)	25 h (meas.)

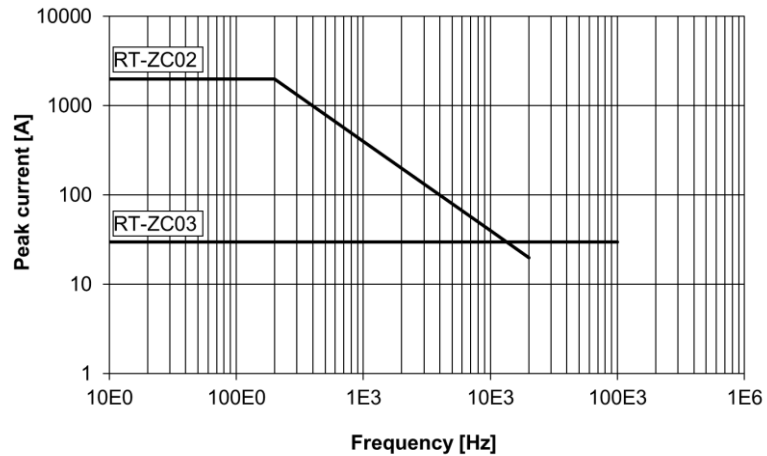

*Maximum rated peak input current versus frequency*

## R&S®RT-ZC05B/-ZC10(B)/-ZC15B/-ZC20(B)/-ZC30 current probes

All parameters are valid when the probe is connected to an appropriate Rohde & Schwarz oscilloscope with an input impedance of 1 MΩ. See table on page 4 and Rohde & Schwarz oscilloscope operating manual for more details.

		R&S®RT-ZC05B	R&S®RT-ZC10(B)
<b>Step response</b>			
Rise time	10 % to 90 %, calculated from bandwidth	175 ns	35 ns
Propagation delay		100 ns (meas.)	36 ns (meas.)
<b>Frequency response</b>			
Bandwidth	–3 dB, starting at DC	>2 MHz	>10 MHz
<b>Input impedance</b>		see figure on page 47	
<b>DC characteristics</b>			
Sensitivity		0.01 V/A	
Sensitivity error	+23 °C ±3 °C	±1 %	
Zero error	referenced to probe input after demagnetizing and zero adjustment	±500 mA (meas.)	±100 mA (meas.)
<b>AC characteristics</b>			
AC sensitivity error (sinusoidal, 45 Hz to 66 Hz)	+23 °C ±3 °C	±1 % ± 500 mA (RMS)	±1 % ± 100 mA (RMS)
	0 °C to +40 °C	±3 % ± 500 mA (RMS) (meas.)	±3 % ± 100 mA (RMS) (meas.)
Measurement due to external magnetic fields	400 A/m magnetic field, DC or 60 Hz, referenced to probe input	< 800 mA (RMS) (meas.)	< 150 mA (RMS) (meas.)
<b>Maximum rated input</b>			
Maximum continuous current	derated, see figures on page 47	500 A (RMS)	150 A (RMS)
Maximum transient current	peak	±700 A	±300 A
<b>Other</b>			
Noise	20 MHz measurement bandwidth, referenced to probe input	25 mA (RMS) (meas.)	




		R&S®RT-ZC15B	R&S®RT-ZC20(B)
<b>Step response</b>			
Rise time	10 % to 90 %, calculated from bandwidth	7 ns	3.5 ns
Propagation delay		16.5 ns (meas.)	14.8 ns (meas.)
<b>Frequency response</b>			
Bandwidth	–3 dB, starting at DC	>50 MHz	>100 MHz
<b>Input impedance</b>		see figure on page 47	
<b>DC characteristics</b>			
Sensitivity		0.1 V/A	
Sensitivity error	+23 °C ±3 °C	±1 %	
Zero error	referenced to probe input after demagnetizing and zero adjustment	±10 mA (meas.)	
<b>AC characteristics</b>			
AC sensitivity error (sinusoidal, 45 Hz to 66 Hz)	+23 °C ±3 °C	±1 % ± 10 mA (RMS)	
	0 °C to +40 °C	±3 % ± 10 mA (RMS) (meas.)	
Measurement due to external magnetic fields	400 A/m magnetic field, DC or 60 Hz, referenced to probe input	< 20 mA (RMS) (meas.)	< 5 mA (RMS) (meas.)
<b>Maximum rated input</b>			
Maximum continuous current	derated, see figures on page 47	30 A (RMS)	
Maximum transient current	peak	±50 A	
<b>Other</b>			
Noise	20 MHz measurement bandwidth, referenced to probe input	2.5 mA (RMS) (meas.)	


		R&S®RT-ZC30
<b>Step response</b>		
Rise time	10 % to 90 %, calculated from bandwidth	2.9 ns
<b>Frequency response</b>		
Bandwidth	–3 dB, starting at DC	>120 MHz
<b>Input impedance</b>		see figure on page 47
<b>DC characteristics</b>		
Sensitivity		1 V/A
Sensitivity error	+23 °C ±3 °C	±3 %
Zero error	referenced to probe input after demagnetizing and zero adjustment	±1 mA (meas.)
<b>AC characteristics</b>		
AC measurement error (sinusoidal, 45 Hz to 66 Hz)	+23 °C ±3 °C	±3 % ±1 mA (RMS)
	0 °C to +40 °C	±5 % ±1 mA (RMS) (meas.)
Measurement due to external magnetic fields	400 A/m magnetic field, DC or 60 Hz, referenced to probe input	< 5 mA (RMS) (meas.)
<b>Maximum rated input</b>		
Maximum continuous current	derated, see figures on page 47	5 A (RMS)
Maximum transient current	peak	±7.5 A
<b>Other</b>		
Noise	30 MHz measurement bandwidth, referenced to probe input	60 µA (RMS) (meas.)

**General data**


		R&S®RT-ZC05B/ R&S®RT-ZC10(B)	R&S®RT-ZC15B/ R&S®RT-ZC20(B)/ R&S®RT-ZC30
<b>Temperature</b>			
Temperature loading	operating temperature range	0 °C to +40 °C	
	storage temperature range	-10 °C to +50 °C	
Climatic loading		80 % relative humidity	
Altitude	operation	up to 2000 m	
<b>Safety</b>		in line with EN 61010-2-032 (type D sensor, insulated conductor only)	
<b>RoHS</b>		in line with EN50581	
<b>EMC</b>		in line with EN 61326-1, CISPR 11/EN 55011 (class B, table 2)	
<b>Calibration interval</b>		1 year	
<b>Mechanical data</b>			
Dimensions	max. conductor diameter	approx. 20 mm (0.79 in)	approx. 5 mm (0.2 in)
	cable length, probe	approx. 2 m (78.7 in)	approx. 1.5 m (59 in)
	cable length, power supply of R&S®RT-ZCxx	approx. 1 m (39.4 in)	approx. 1 m (39.4 in)
	probe head (W x H x L, approx.)	27 mm x 69 mm x 176 mm (1.06 in x 2.72 in x 6.93 in)	18 mm x 40 mm x 175 mm (0.71 in x 1.57 in x 6.89 in)
Weight	probe only	approx. 500 g (1.1 lb)	approx. 240 g (0.53 lb)
<b>Probe interface</b>			
Connector	R&S®RT-ZCxx	BNC	
	R&S®RT-ZCxxB	Rohde & Schwarz probe interface	
Supply voltage	R&S®RT-ZCxx	external power supply necessary (e.g. R&S®RT-ZA13) ±12 V ± 0.5 V (5.5 W)	
	R&S®RT-ZCxxB	power supply by Rohde & Schwarz probe interface	

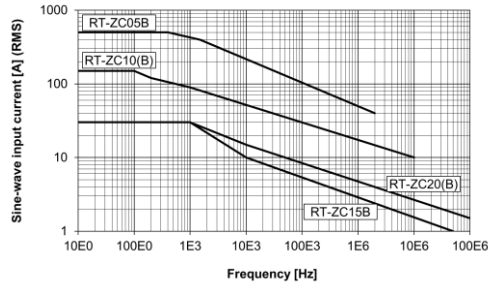


Maximum rated sine-wave root mean square input current versus frequency

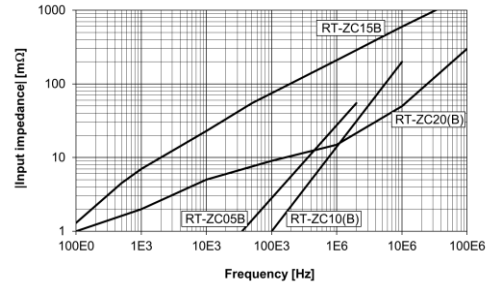

Input impedance (meas.)

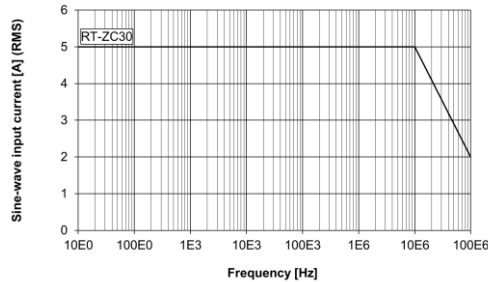

Maximum rated sine-wave root mean square input current versus frequency

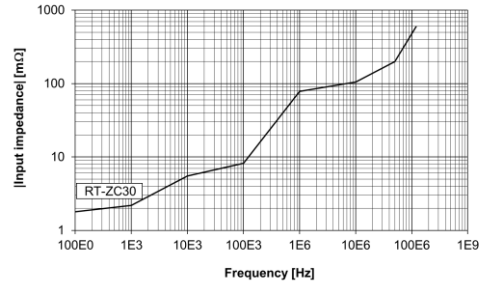

Input impedance (meas.)


## R&S®RT-ZC31 current probe

All parameters are valid when the probe is connected to an appropriate Rohde & Schwarz oscilloscope with an input impedance of 1 MΩ. See table on page 4 and Rohde & Schwarz oscilloscope operating manual for more details.


		<b>R&amp;S®RT-ZC31</b>		
<b>Sensitivity setting</b>		0.1 V/A	1 V/A	10 V/A
<b>Step response</b>				
Rise time	10 % to 90 %, calculated from bandwidth	2.9 ns		
Propagation delay		12 ns (meas.)	12 ns (meas.)	13 ns (meas.)
<b>Frequency response</b>				
Bandwidth	–3 dB, starting at DC	>120 MHz		
<b>Input impedance</b>		see figure on page 47		
<b>DC characteristics</b>				
Sensitivity error	+23 °C ±5 °C	±3 %, ±1 % (meas.)		
Zero error	referenced to probe input after demagnetizing and zero adjustment	±10 mA (meas.)	±1 mA (meas.)	±1 mA (meas.)
<b>AC characteristics</b>				
AC measurement error (sinusoidal, 45 Hz to 66 Hz)	+23 °C ±5 °C	±3 % ±10 mA (RMS)	±3 % ±1 mA (RMS)	±3 % ±1 mA (RMS)
	(meas.)	±1 % ±10 mA (RMS)	±1 % ±1 mA (RMS)	±1 % ±1 mA (RMS)
Measurement due to external magnetic fields	400 A/m magnetic field, DC or 60 Hz, referenced to probe input	< 5 mA (RMS) (meas.)		
<b>Maximum rated input</b>				
Maximum continuous current	derated, see figures on page 47	30 A (RMS)	5 A (RMS)	0.5 A (RMS)
Maximum transient current	peak, input for max. 2 s	±50 A	±7.5 A	±0.75 A
<b>Other</b>				
Noise	20 MHz measurement bandwidth, referenced to probe input			60 µA (RMS) (meas.)

## General data

		R&S®RT-ZC31
<b>Temperature</b>		
Temperature loading	operating temperature range	0 °C to +40 °C
	storage temperature range	−10 °C to +50 °C
Climatic loading		80 % relative humidity
Altitude	operation	up to 2000 m
<b>Safety</b>		in line with EN 61010-2-032 (type D sensor, insulated conductor only)
<b>RoHS</b>		in line with EN50581
<b>EMC</b>		in line with EN 61326-1, CISPR 11/EN 55011 (class B, table 2)
<b>Calibration interval</b>		1 year
<b>Mechanical data</b>		
Dimensions	max. conductor diameter	approx. 5 mm (0.2 in)
	cable length, probe cord	approx. 1.5 m (59.6 in)
	cable length, junction box to interface box	approx. 0.15 m (6.0 in)
	cable length, power cord	approx. 1 m (39.4 in)
	probe head (W × H × L)	approx. 18 mm × 26 mm × 155 mm (0.71 in × 1.02 in × 6.10 in)
	junction box (W × H × L)	approx. 45 mm × 25 mm × 120 mm (1.77 in × 0.98 in × 4.72 in)
	interface box (W × H × L)	approx. 29 mm × 40 mm × 83 mm (1.14 in × 1.57 in × 3.27 in)
Weight	probe only	approx. 370 g (0.82 lb)
<b>Probe interface</b>		
Connector		BNC
Supply voltage		external power supply necessary (e.g. R&S®RT-ZA13) ±12 V ± 0.5 V (7.8 W)

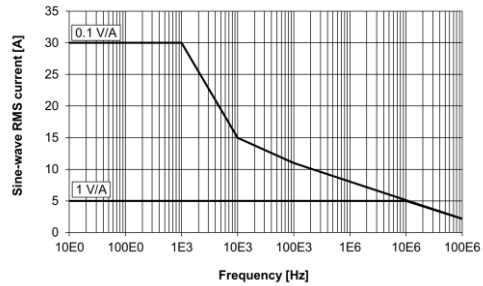

Maximum rated sine-wave root mean square input current versus frequency

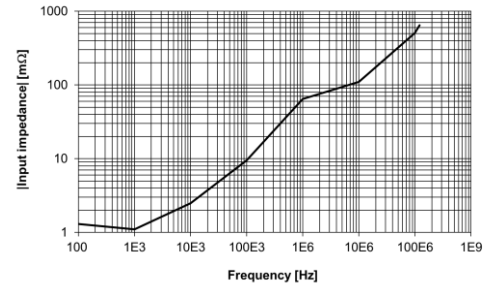

Input impedance (meas.)

## R&S®RT-ZA13 probe power supply

<b>Electrical data</b>		
Number of channels		4
Output voltage		$\pm 12 \text{ V} \pm 0.5 \text{ V}$
Maximum output current	sum total of all channels	2.5 A
Power requirements		100 V to 240 V, 50/60 Hz
Maximum rated input power		170 W

## General data

<b>Safety</b>		in line with EN 61010-1
<b>RoHS</b>		in line with EN50581
<b>EMC</b>		in line with EN 61326-1 (class B equipment), EN 61000-3-2, EN 61000-3-3
<b>Mechanical data</b>		
Dimensions	W × H × L	approx. 80 mm × 119 mm × 200 mm (3.1 in × 4.7 in × 7.9 in)
Weight		approx. 1.1 kg (2.4 lb)
Connector		LEMO FFA.OS.304.CLAC44Z



## Ordering information

Designation	Type	Order No.
<b>High voltage passive probes</b>		
250 MHz high voltage probe, passive, 100:1, 100 M $\Omega$ , 6.5 pF, 850 V (RMS) Incl. adjustment tool; coding clips (set) 2 x 4 colors; signal pin (2); sprung hook 5 mm; ground lead 14 cm; insulating cap; protective cap; operating manual	R&S®RT-ZH03	1333.0873.02
400 MHz high voltage probe, passive, 100:1, 50 M $\Omega$ , 7.5 pF, 1 kV (RMS) Incl. adjustment tool; BNC adapter 5.0-L; coding rings (set) 3 x 4 colors; flexible adapter 5.0-L; ground lead 22 cm (2); ground lead 22 cm to 4 mm banana plug; insulating cap 5.0-L; operating manual; protection cap 5.0-L; safety alligator clip (2); solid tip 0.8 mm (5); spring tip 0.8 mm (5); sprung hook 5.0-L (2)	R&S®RT-ZH10	1409.7720.02
400 MHz high voltage probe, passive, 1000:1, 50 M $\Omega$ , 7.5 pF, 1 kV (RMS) See R&S®RT-ZH10 for equipment included	R&S®RT-ZH11	1409.7737.02
500 MHz isolated probe, passive, 10:1, 10 M $\Omega$ , 12 pF, 1 kV (RMS) CAT III Incl. coding rings (set) 5 x 2 colors; ground lead 32 cm with safety alligator clip; sprung hook; ground pin; operating manual	R&S®RT-ZI10	1326.1761.02
500 MHz isolated probe, passive, 10:1, 10 M $\Omega$ , 11 pF, 300 V (RMS) CAT III Incl. coding rings (set) 5 x 2 colors; ground lead with safety alligator clip; sprung hook; ground pin; BNC adapter, operating manual	R&S®RT-ZI10C	1326.3106.02
500 MHz isolated probe, passive, 100:1, 100 M $\Omega$ , 4.6 pF, 1 kV (RMS) CAT III Incl. coding rings (set) 5 x 2 colors; ground lead 32 cm with safety alligator clip; sprung hook; ground pin; operating manual	R&S®RT-ZI11	1326.1810.02

Designation	Type	Order No.
<b>Differential probes</b>		
25 MHz differential probe, $\pm 700$ V, 1 kV (RMS) CAT III, BNC Incl. sprung hook 4 mm (red, black); safety alligator clip 4 mm (red, black); USB power cord; trimming tool; operating manual	R&S®RT-ZD002	1337.9700.02
25 MHz differential probe, $\pm 1.4$ kV, 1 kV (RMS) CAT III, BNC Incl. sprung hook 4 mm (red, black); safety alligator clip 4 mm (red, black); USB power cord; trimming tool; operating manual	R&S®RT-ZD003	1337.9800.02
100 MHz differential probe, $\pm 1.4$ kV, 1 kV (RMS) CAT III, BNC Incl. sprung hook 4 mm (2); USB power cord; carrying case; operating manual	R&S®RT-ZD01	1422.0703.02
200 MHz differential probe, $\pm 20$ V, BNC Incl. safety alligator clip 4 mm (2); sprung hook 4 mm (2); USB power cord; 9 V battery; carrying case; operating manual	R&S®RT-ZD02	1333.0821.02
800 MHz differential probe, $\pm 15$ V, BNC Incl. lead 11 cm (2); lead 7 cm (2); signal pin (6); dual pin (4); mini clip (2); micro clip (2); USB power cord; 9 V battery; carrying case; operating manual	R&S®RT-ZD08	1333.0838.02
200 MHz differential probe, $\pm 750$ V, 600 V (RMS) CAT II, Rohde & Schwarz probe interface Incl. R&S®RT-ZA24 accessory kit; R&S®RT-ZA22 test leads; R&S®RT-ZHD protector; carrying case; operating manual	R&S®RT-ZHD07	1800.2307.02
100 MHz differential probe, $\pm 1.5$ kV, 1 kV (RMS) CAT III, Rohde & Schwarz probe interface Incl. R&S®RT-ZA24 accessory kit; R&S®RT-ZA22 test leads; R&S®RT-ZHD protector; carrying case; operating manual	R&S®RT-ZHD15	1800.2107.02
200 MHz differential probe, $\pm 1.5$ kV, 1 kV (RMS) CAT III, Rohde & Schwarz probe interface Incl. R&S®RT-ZA24 accessory kit; R&S®RT-ZA22 test leads; R&S®RT-ZHD protector; carrying case; operating manual	R&S®RT-ZHD16	1800.2207.02
100 MHz differential probe, $\pm 6$ kV, 1 kV (RMS) CAT III, Rohde & Schwarz probe interface Incl. R&S®RT-ZA24 accessory kit; R&S®RT-ZA22 test leads; R&S®RT-ZHD protector; carrying case; operating manual	R&S®RT-ZHD60	1800.2007.02

Designation	Type	Order No.
<b>Current probes</b>		
20 kHz current probe, AC/DC, 0.01/0.001 V/A, 1000 A, 300 V (RMS) CAT III, BNC Incl. operating manual	R&S®RT-ZC02	1333.0850.02
100 kHz current probe, AC/DC, 0.1 V/A, 30 A, 300 V (RMS) CAT III, BNC Incl. operating manual	R&S®RT-ZC03	1333.0844.02
10 MHz current probe, AC/DC, 0.01 V/A, 150 A (RMS), BNC Incl. carrying case; operating manual	R&S®RT-ZC10	1409.7750K02
100 MHz current probe, AC/DC, 0.1 V/A, 30 A (RMS), BNC Incl. carrying case; operating manual	R&S®RT-ZC20	1409.7766K02
120 MHz current probe, AC/DC, 1 V/A, 5 A (RMS), BNC Incl. carrying case; operating manual	R&S®RT-ZC30	1409.7772K02
120 MHz current probe, AC/DC, 0.1 V/A / 1 V/A / 10 V/A, 30 A (RMS), BNC Incl. carrying case; operating manual	R&S®RT-ZC31	1801.4932K02
2 MHz current probe, AC/DC, 0.01 V/A, 500 A (RMS), Rohde & Schwarz probe interface Incl. carrying case; operating manual	R&S®RT-ZC05B	1409.8204.02
10 MHz current probe, AC/DC, 0.01 V/A, 150 A (RMS), Rohde & Schwarz probe interface Incl. carrying case; operating manual	R&S®RT-ZC10B	1409.8210.02
50 MHz current probe, AC/DC, 0.1 V/A, 30 A (RMS), Rohde & Schwarz probe interface Incl. carrying case; operating manual	R&S®RT-ZC15B	1409.8227.02
100 MHz current probe, AC/DC, 0.1 V/A, 30 A (RMS), Rohde & Schwarz probe interface Incl. carrying case; operating manual	R&S®RT-ZC20B	1409.8233.02

Designation	Type	Order No.
<b>Accessories and sets</b>		
Mini clips, contains: mini clip (10)	R&S®RT-ZA4	1416.0428.02
Micro clips, contains: micro clip (4)	R&S®RT-ZA5	1416.0434.02
Lead set, contains: lead 6 cm (2.4 in) (5); lead 15 cm (5.9 in) (5)	R&S®RT-ZA6	1416.0440.02
Probe box to N/USB adapter	R&S®RT-ZA9	1417.0909.02
SMA(f) to BNC(m) adapter	R&S®RT-ZA10	1416.0457.02
Adapter BNC to 4 mm dual banana	R&S®RT-ZA11	1333.0796.02
Probe power supply	R&S®RT-ZA13	1409.7789.02
Spare accessory set for R&S®RT-ZI10/11 isolated probes Contains: insulating sleeve (2), reference contact (2), reference leads with crocodile clip, color clips, sprung hook	R&S®RT-ZA20	1326.1978.02
Extended accessory set for R&S®RT-ZI10/11 isolated probes Contains: jaw clip, safety jaw clip, reference lead with 4 mm connector, reference lead with hook clip, 4 mm test probe, BNC connector, dual 4 mm to safety BNC adapter	R&S®RT-ZA21	1326.1984.02
Multimeter test leads, two leads (red/black), 1000 V CAT III	R&S®RT-ZA22	1326.0988.02
Accessory kit for R&S®RT-ZHD high-voltage differential probes Contains: safety alligator clip (red/black); pincer clip (red/black); test clip (red/black); spade terminal (red/black); lead 17 cm (red/black); lead 100 cm (red/black)	R&S®RT-ZA24	1800.2707.02
Probe positioner, 2 legged	R&S®RT-ZA29	1801.4803.02
Probe tip accessory set for R&S®RT-ZP03, R&S®RT-ZP05S, R&S®RT-ZH03 passive voltage probes Contains: ground lead; retractable hook; adjustment tool; protection cap; identification tags; IC insulating cap; solid probe tip (2); spring-loaded probe tip (2); ground clip; BNC adapter;	R&S®RT-ZA40	1338.0742.02
3D probe positioner	R&S®RT-ZAP	1326.3641.02
Power deskew fixture	R&S®RT-ZF20	1800.0004.02

<b>Service options</b>		
Extended warranty, one year	R&S®WE1	Please contact your local Rohde & Schwarz sales office.
Extended warranty, two years	R&S®WE2	
Extended warranty, three years	R&S®WE3	
Extended warranty, four years	R&S®WE4	
Extended warranty with calibration coverage, one year	R&S®CW1	
Extended warranty with calibration coverage, two years	R&S®CW2	
Extended warranty with calibration coverage, three years	R&S®CW3	
Extended warranty with calibration coverage, four years	R&S®CW4	
Extended warranty with accredited calibration coverage, one year	R&S®AW1	
Extended warranty with accredited calibration coverage, two years	R&S®AW2	
Extended warranty with accredited calibration coverage, three years	R&S®AW3	
Extended warranty with accredited calibration coverage, four years	R&S®AW4	

**Extended warranty with a term of one to four years (WE1 to WE4)**

Repairs carried out during the contract term are free of charge <sup>2</sup>. Necessary calibration and adjustments carried out during repairs are also covered.

**Extended warranty with calibration (CW1 to CW4)**

Enhance your extended warranty by adding calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated, inspected and maintained during the term of the contract. It includes all repairs <sup>2</sup> and calibration at the recommended intervals as well as any calibration carried out during repairs or option upgrades.

**Extended warranty with accredited calibration (AW1 to AW4)**

Enhance your extended warranty by adding accredited calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated under accreditation, inspected and maintained during the term of the contract. It includes all repairs <sup>2</sup> and accredited calibration at the recommended intervals as well as any accredited calibration carried out during repairs or option upgrades.

---

<sup>2</sup> Excluding defects caused by incorrect operation or handling and force majeure. Wear-and-tear parts are not included.



## Service that adds value

- ▶ Worldwide
- ▶ Local und personalized
- ▶ Customized and flexible
- ▶ Uncompromising quality
- ▶ Long-term dependability

## Rohde & Schwarz GmbH & Co. KG

[www.rohde-schwarz.com](http://www.rohde-schwarz.com)

## Rohde & Schwarz customer support

[www.rohde-schwarz.com/support](http://www.rohde-schwarz.com/support)



## Sustainable product design

- ▶ Environmental compatibility and eco-footprint
- ▶ Energy efficiency and low emissions
- ▶ Longevity and optimized total cost of ownership

Certified Quality Management

**ISO 9001**

Certified Environmental Management

**ISO 14001**

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG  
Trade names are trademarks of the owners  
PD 5214.2362.22 | Version 22.00 | September 2020 (sk)  
R&S®RT-Zxx High Voltage and Current Probes  
Data without tolerance limits is not binding | Subject to change  
© 2009 - 2020 Rohde & Schwarz GmbH & Co. KG | 81671 Munich, Germany

5214236222

5214.2362.22 22.00 PDF 1 en