

# Encapsulated Transformers

## 230V Primary




### Features:

- Robust construction.
- Wide range of secondary voltages available.

Designed and manufactured according to international safety standard EN61558 Multicomp encapsulated transformers are the result of long experience in the field of manufacturing high quality transformers.

Due to their construction and encapsulation these transformers provide excellent performance in aggressive environments where potential exists for changes in temperature and humidity.

- Single voltage and dual voltage secondary combinations.
- 0.7VA up to 35VA.

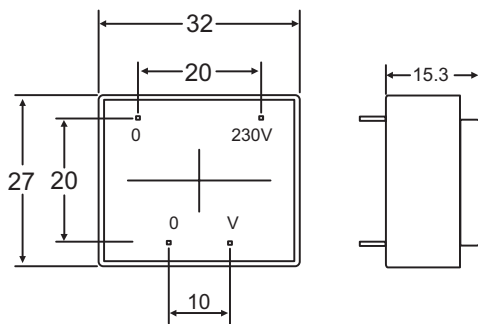

### Specifications 0.6VA Per Secondary Winding

Power Rating	Secondary	Part Number
0.6VA	0-6V @ 0.1A	15-4515CE
	0-9V @ 0.067A	15-4516CE
	0-12V @ 0.05A	15-4517CE
	0-15V @ 0.04A	15-4518CE
	0-18V @ 0.03A	15-4519CE
	0-21V @ 0.028A	15-4520CE




# Encapsulated Transformers

## 230V Primary




### Specifications 0.9VA - 1.8VA Per Secondary Winding

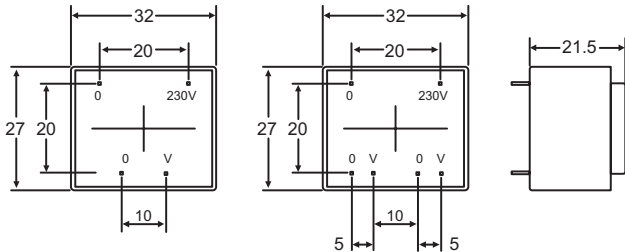

Power Rating	Secondary	Part Number
1.8VA	0-6V @ 0.3A	15-4521CE
	0-9V @ 0.2A	15-4523CE
	0-12V @ 0.15A	15-4525CE
	0-15V @ 0.12A	15-4527CE
	0-18V @ 0.1A	15-4529CE
	0-24V @ 0.16A	15-4530CE
0.9VA - 1.8VA per secondary winding	0-24V @ 0.15A	15-4522CE
	0-6V, 0-6V @ 0.1A	15-4524CE
	0-12V, 0-12V @ 0.075A	15-4526CE
	0-15V, 0-15V @ 0.06A	15-4528CE

### Specifications 1.15VA - 2.3VA Per Secondary Winding

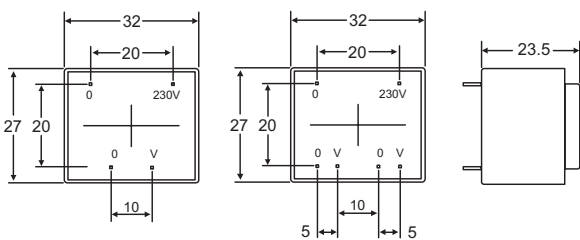

Power Rating	Secondary	Part Number
2.3VA	0-6V @ 0.38A	15-4531CE
	0-9V @ 0.25A	15-4533CE
	0-12V @ 0.19A	15-4535CE
	0-15V @ 0.15A	15-4537CE
	0-18V @ 0.12A	15-4539CE
	0-21V @ 0.1A	15-4540CE
	0-24V @ 0.09A	15-4541CE
1.15VA - 2.3VA per secondary winding	0-6V, 0-6V @ 0.19A	15-4532CE
	0-9V, 0-9V @ 0.12A	15-4534CE
	0-12V, 0-12V @ 0.09A	15-4536CE
	0-15V, 0-15V @ 0.07A	15-4538CE




# Encapsulated Transformers

## 230V Primary




### Specifications 1.3VA - 2.6VA Per Secondary Winding

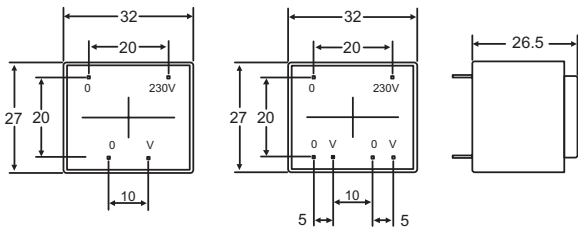

Power Rating	Secondary	Part Number
2.6VA	0-6V @ 0.43A	15-4542CE
	0-9V @ 0.28A	15-4544CE
	0-12V @ 0.21A	15-4546CE
	0-15V @ 0.17A	15-4548CE
	0-18V @ 0.14A	15-4550CE
	0-21V @ 0.12A	15-4551CE
	0-24V @ 0.10A	15-4552CE
1.3VA - 2.6VA per secondary winding	0-6V, 0-6V @ 0.21A	15-4543CE
	0-9V, 0-9V @ 0.14A	15-4545CE
	0-12V, 0-12V @ 0.10A	15-4547CE
	0-15V, 0-15V @ 0.08A	15-4549CE

### Specifications 1.5VA - 3VA Per Secondary Winding

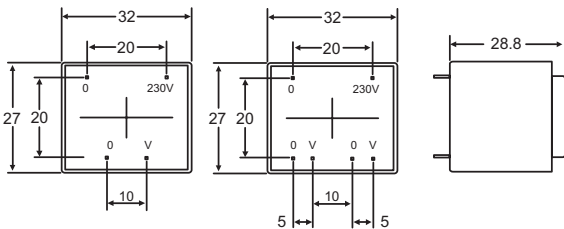

Power Rating	Secondary	Part Number
3VA	0-6V @ 0.5A	15-4553CE
	0-9V @ 0.33A	15-4555CE
	0-12V @ 0.25A	15-4557CE
	0-15V @ 0.2A	15-4559CE
	0-18V @ 0.16A	15-4561CE
	0-21V @ 0.14A	15-4562CE
	0-24V @ 0.125A	15-4563CE
1.5VA - 3VA per secondary winding	0-9V, 0-9V @ 0.16A	15-4556CE
	0-12V, 0-12V @ 0.12A	15-4558CE
	0-15V, 0-15V @ 0.1A	15-4560CE




# Encapsulated Transformers

## 230V Primary




### Specifications 1.6VA - 3.2VA Per Secondary Winding

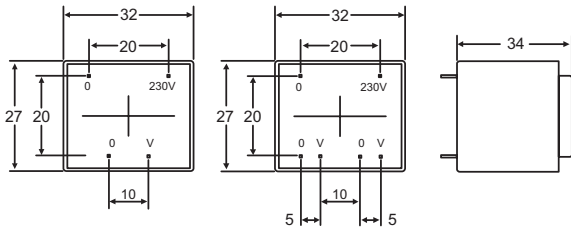

Power Rating	Secondary	Part Number
3.2VA	0-6V @ 0.53A	15-4564CE
	0-9V @ 0.35A	15-4566CE
	0-12V @ 0.26A	15-4568CE
	0-15V @ 0.21A	15-4570CE
	0-18V @ 0.17A	15-4572CE
	0-21V @ 0.15A	15-4573CE
	0-24V @ 0.13A	15-4574CE
1.6VA - 3.2VA per secondary winding	0-6V, 0-6V @ 0.26A	15-4565CE
	0-9V, 0-9V @ 0.17A	15-4567CE
	0-12V, 0-12V @ 0.13A	15-4569CE
	0-15V, 0-15V @ 0.10A	15-4571CE

### Specifications 2.5VA - 5VA Per Secondary Winding

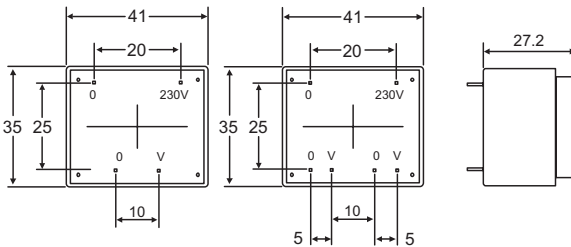

Power Rating	Secondary	Part Number
5VA	0-6V @ 0.83A	15-4575CE
	0-9V @ 0.55A	15-4577CE
	0-12V @ 0.41A	15-4579CE
	0-15V @ 0.33A	15-4581CE
	0-18V @ 0.27A	15-4583CE
	0-24V @ 0.20A	15-4584CE
2.5VA - 5VA per secondary winding	0-6V, 0-6V @ 0.41A	15-4576CE
	0-9V, 0-9V @ 0.27A	15-4578CE
	0-12V, 0-12V @ 0.20A	15-4580CE
	0-15V, 0-15V @ 0.16A	15-4582CE




# Encapsulated Transformers

## 230V Primary




### Specifications 4VA - 8VA Per Secondary Winding

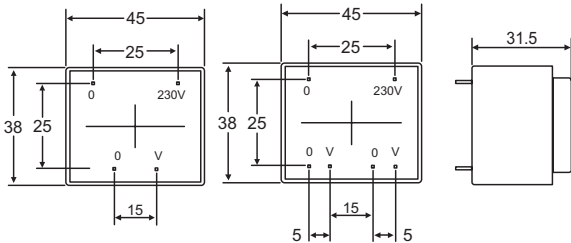


Power Rating	Secondary	Part Number
8VA	0-6V @ 1.33A	15-4585CE
	0-9V @ 0.88A	15-4587CE
	0-12V @ 0.66A	15-4589CE
	0-15V @ 0.53A	15-4591CE
	0-18V @ 0.44A	15-4593CE
	0-24V @ 0.33A	15-4594CE
4VA - 8VA per secondary winding	0-6V, 0-6V @ 0.66A	15-4586CE
	0-9V, 0-9V @ 0.44A	15-4588CE
	0-12V, 0-12V @ 0.66A	15-4590CE
	0-15V, 0-15V @ 0.26A	15-4592CE

### Specifications 5VA - 10VA Per Secondary Winding

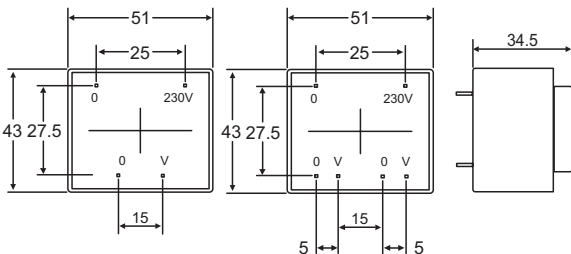

Power Rating	Secondary	Part Number
10VA	0-6V @ 1.66A	15-4595CE
	0-9V @ 1.11A	15-4597CE
	0-12V @ 0.83A	15-4599CE
	0-15V @ 0.66A	15-4601CE
	0-18V @ 0.55A	15-4603CE
	0-24V @ 0.41A	15-4604CE
5VA - 10VA per secondary winding	0-6V, 0-6V @ 0.83A	15-4596CE
	0-9V, 0-9V @ 0.55A	15-4598CE
	0-12V, 0-12V @ 0.41A	15-4600CE
	0-15V, 0-15V @ 0.33A	15-4602CE

### Specifications 8VA - 16VA Per Secondary Winding

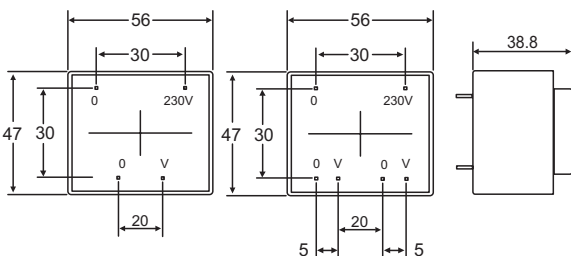

Power Rating	Secondary	Part Number
16VA	0-6V @ 2.66A	15-4605CE
	0-9V @ 1.77A	15-4607CE
	0-12V @ 1.33A	15-4609CE
	0-15V @ 1.06A	15-4611CE
	0-18V @ 0.88A	15-4613CE
	0-24V @ 0.66A	15-4614CE
8VA - 16VA per secondary winding	0-6V, 0-6V @ 1.33A	15-4606CE
	0-9V, 0-9V @ 0.88A	15-4608CE
	0-12V, 0-12V @ 0.66A	15-4610CE
	0-15V, 0-15V @ 0.53A	15-4612CE




# Encapsulated Transformers

## 230V Primary




### Specifications 14VA - 28VA Per Secondary Winding

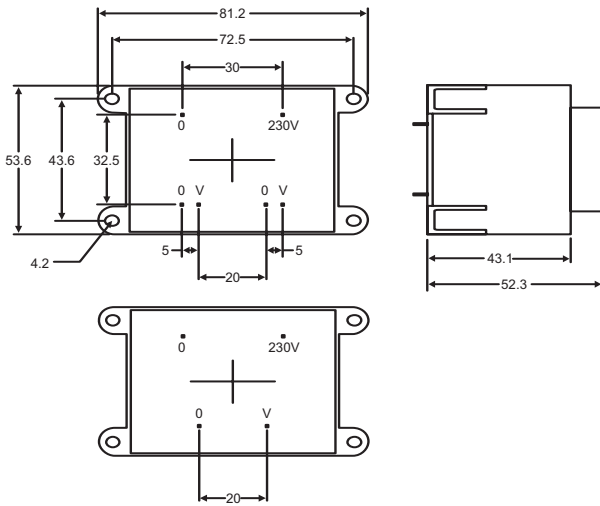

Power Rating	Secondary	Part Number
28VA	0-6V @ 4.66A	15-4615CE
	0-9V @ 3.11A	15-4617CE
	0-12V @ 2.33A	15-4619CE
	0-15V @ 1.86A	15-4621CE
	0-18V @ 1.55A	15-4623CE
	0-24V @ 1.16A	15-4624CE
14VA - 28VA per secondary winding	0-6V, 0-6V @ 2.33A	15-4616CE
	0-9V, 0-9V @ 1.55A	15-4618CE
	0-12V, 0-12V @ 1.16A	15-4620CE
	0-15V, 0-15V @ 0.93A	15-4622CE

### Specifications 17.5VA - 30VA Per Secondary Winding

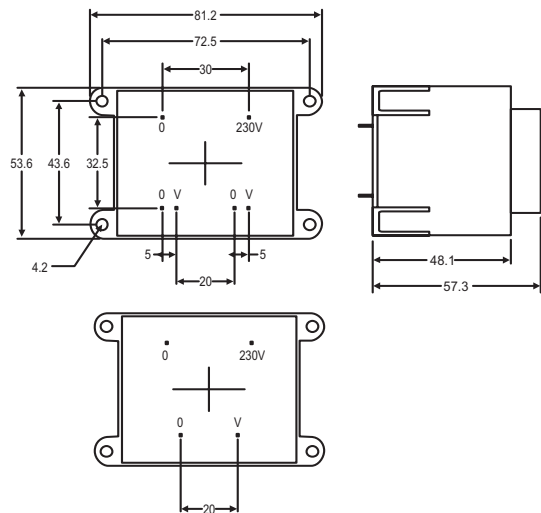

Power Rating	Secondary	Part Number
35VA	0-6V @ 5.83A	15-4625CE
	0-9V @ 3.88A	15-4627CE
	0-12V @ 2.91A	15-4629CE
	0-15V @ 2.33A	15-4631CE
	0-18V @ 1.94A	15-4633CE
	0-24V @ 1.45A	15-4634CE
17.5VA - 35VA per secondary winding	0-6V, 0-6V @ 2.91A	15-4626CE
	0-9V, 0-9V @ 1.94A	15-4628CE
	0-12V, 0-12V @ 1.45A	15-4630CE
	0-15V, 0-15V @ 1.16A	15-4632CE



# Encapsulated Transformers

## 230V Primary



### Notes:

### International Sales Offices:



**AUSTRALIA – Farnell InOne**  
Tel No: ++ 61 2 9645 8888  
Fax No: ++ 61 2 9644 7898



**FINLAND – Farnell InOne**  
Tel No: ++ 358 9 560 7780  
Fax No: ++ 358 9 345 5411



**NETHERLANDS – Farnell InOne**  
Tel No: ++ 31 30 241 7373  
Fax No: ++ 31 30 241 7333



**SWITZERLAND – Farnell InOne**  
Tel No: ++ 41 1 204 64 64  
Fax No: ++ 41 1 204 64 54



**AUSTRIA – Farnell InOne**  
Tel No: ++ 43 662 2180 680  
Fax No: ++ 43 662 2180 670



**FRANCE – Farnell InOne**  
Tel No: ++ 33 474 68 99 99  
Fax No: ++ 33 474 68 99 90



**NEW ZEALAND – Farnell InOne**  
Tel No: ++ 64 9 357 0646  
Fax No: ++ 64 9 357 0656



**UK – Farnell InOne**  
Tel No: ++ 44 8701 200 200  
Fax No: ++ 44 8701 200 201



**BELGIUM – Farnell InOne**  
Tel No: ++ 32 3 475 2810  
Fax No: ++ 32 3 227 3648



**GERMANY – Farnell InOne**  
Tel No: ++ 49 89 61 39 39 39  
Fax No: ++ 49 89 613 59 01



**NORWAY – Farnell InOne**  
Tel No: ++ 45 44 53 66 66  
Fax No: ++ 45 44 53 66 02



**UK – BuckHickman InOne**  
++ 44 8450 510 150  
++ 44 8450 510 130



**BRAZIL – Farnell-Newark InOne**  
Tel No: ++ 55 11 4066 9400  
Fax No: ++ 55 11 4066 9410



**HONG KONG – Farnell-Newark InOne**  
Tel No: ++ 852 2268 9888  
Fax No: ++ 852 2268 9899



**PORTUGAL – Farnell InOne**  
Tel No: ++ 34 93 475 8804  
Fax No: ++ 34 93 474 5288



**UK – CPC**  
++ 44 8701 202 530  
++ 44 8701 202 531



**CHINA – Farnell-Newark InOne**  
Tel No: ++86 10 6238 5152  
Fax No: ++86 10 6238 5022



**IRELAND – Farnell InOne**  
Tel No: ++ 353 1 830 9277  
Fax No: ++ 353 1 830 9016



**SINGAPORE – Farnell-Newark InOne**  
Tel No: ++ 65 6788 0200  
Fax No: ++ 65 6788 0300



**EXPORT – Farnell InOne**  
Tel No: ++ 44 8701 200 208  
Fax No: ++ 44 8701 200 209

For enquiries from all other markets



**DENMARK – Farnell InOne**  
Tel No: ++ 45 44 53 66 44  
Fax No: ++ 45 44 53 66 06



**ITALY – Farnell InOne**  
Tel No: ++ 39 02 93 995 200  
Fax No: ++ 39 02 93 995 300



**SPAIN – Farnell InOne**  
Tel No: ++ 34 93 475 8805  
Fax No: ++ 34 93 474 5107



**ESTONIA – Farnell InOne**  
Tel No: ++ 358 9 560 7780  
Fax No: ++ 358 9 345 5411



**MALAYSIA – Farnell-Newark InOne**  
Tel No: ++ 60 3 7873 8000  
Fax No: ++ 60 3 7873 7000



**SWEDEN – Farnell InOne**  
Tel No: ++ 46 8 730 50 00  
Fax No: ++ 46 8 83 52 62

<http://www.farnellinone.com>

<http://www.buckhickmaninone.com>

<http://www.cpc.co.uk>

**Disclaimer** This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2004.

