


Agilent U2300A Series USB Modular Multifunction Data Acquisition (DAQ)

Data Sheet

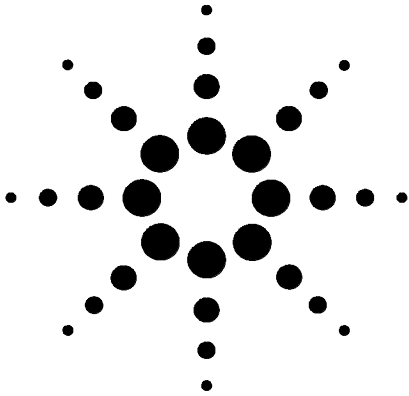

Features

- **Up to 3 MSa/s sampling rate for a single channel**
- **Functions as standalone or modular**
- **Easy to use – plug-and-play and hot-swappable with high speed USB 2.0**
- **Up to 384 channels when incorporated into Agilent Modular Instrument chassis (U2781A)**
- **FREE and easy to use bundled software for quick set up and data logging**
- **12-bit or 16-bit A/D resolution**
- **24-bit programmable digital input/output**
- **Self-calibration capability**
- **Compatible with wide range of Application Development Environments**
- **USBTMC 488.2 standards**

High performance device

Agilent U2300A series USB modular multifunction data acquisition (DAQ) is a high performance plug-and-play solution. It targets a wide range of applications in both industrial and scientific environments. The U2300A series DAQ devices provide functionality that is much easier to use and costs less. It helps you lower your cost of test and accelerates your test system integration and development.

The U2300A series DAQ devices comes with a dual play USB connectivity. The USB interface that is compliant with the USBTMC 488.2 standards works seamlessly with the Agilent Measurement Manager software and can be controlled remotely via industry standard SCPI commands. In addition, the U2300A series DAQ devices come with Agilent IO Libraries Suite 14.2 or higher. The IO Libraries Suite provides robust instrument control and works with the software development environment you choose. IVI-COM driver is also included to ensure an easy integration and compatibility with different programming environments.

The U2300A series DAQ consists of:

- **Basic multifunction DAQ (U2351A, U2352A, U2353A, U2354A)**
- **High density multifunction DAQ (U2355A, U2356A, U2331A)**

Optimized for test systems

Basic multifunction DAQ module consists of four models. They can sample up to 500 kSa/s with a resolution of 16 bits. Whereas, the high density multifunction DAQ module can sample up to 3 MSa/s for single channel and 1 MSa/s for multi channels. This makes it ideal when dealing with high density analog input/output signals, especially with different input ranges and sampling requirements.

The U2300 series DAQ also features a 24-bit programmable I/O lines and 2 independent 31 bits general purpose digital counter. In addition to that, this series of DAQ is able to perform analog and digital functions at full speed. It has a resolution of 12 or 16 bits, with no missing codes. It is also equipped with self-calibration capability. This enables the device to re-adjust its offset within the specified accuracy and ranges.

Modules provide flexible system stimulus and control

Polling and continuous mode - The U2300A series DAQ provides two modes, which are the polling and continuous modes.

Trigger sources - None (intermediate trigger), analog/external digital trigger, SSI/star trigger and master/slave trigger sources. You can configure all these trigger sources for A/D and D/A operations. Master/slave trigger and SSI/Start Trigger are recommended when used with the Agilent U2781A modular instrument chassis.

Predefined function generator - Sine-wave, square-wave, triangle wave, sawtooth and noise waveforms.

Burst mode - Incorporated to simulate simultaneous analog input.

Arbitrary waveform - Arbitrary waveform generation through user's input.

Remote access and control

The built-in user interface provides remote access and control of the U2300 series DAQ instruments via the Agilent Measurement Manager software and SCPI commands. Using the software, you can:

- View and modify instrument setup
- Send trigger signals to instrument
- Open, close, or monitor I/O channels
- Send SCPI commands via Agilent IO Libraries 14.2 Suite or higher.


Works with your choice of software

The Agilent U2300A series USB modular multifunction DAQ works with your choice of software so you can save time and this preserves your software and hardware investments. Program directly with SCPI, or use the IVI-COM software driver that provide compatibility with the most popular development environments and tools as listed below:

- Agilent VEE, Agilent T&M Toolkit
- Microsoft Visual Studio.NET, C/C++ and Visual Basic 6
- LabVIEW
- MATLAB

For more information, please visit www.agilent.com/find/DAQ.

Figure 1 The Agilent Measurement Manager software user interface

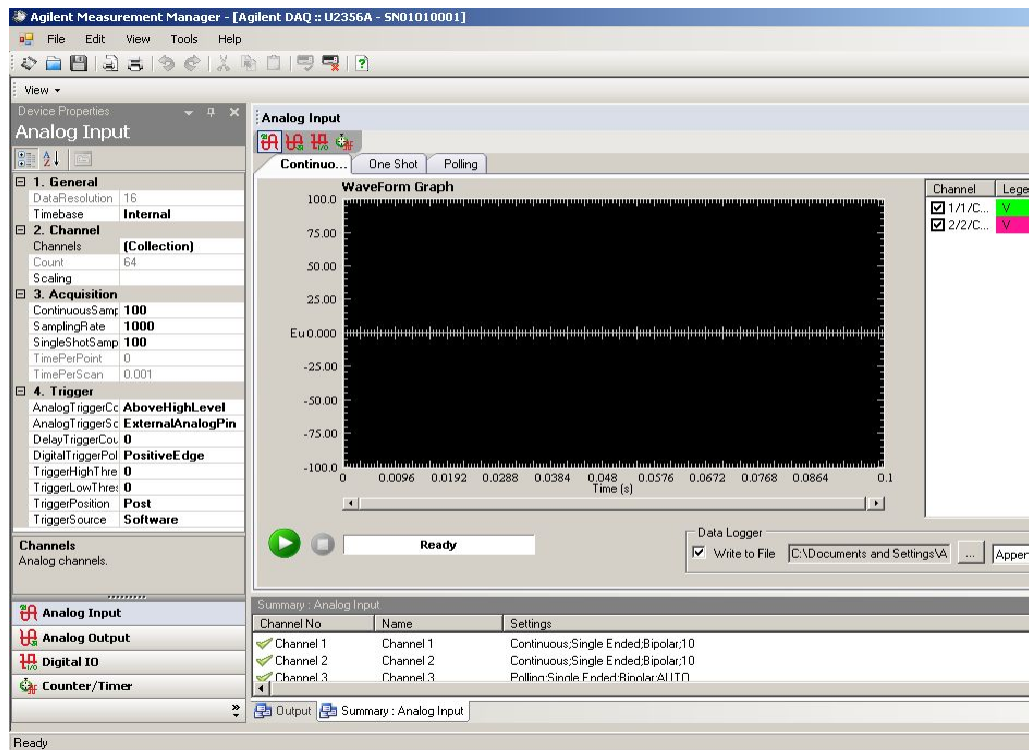

ELECTRICAL SPECIFICATIONS

Basic Multifunction USB DAQ

Model Number	U2351A	U2352A	U2353A	U2354A
Analog Input				
Resolution	16 bits, no missing codes			
Number of channels	16 SE/8 DI (software selectable/ch)			
Maximum sampling rate	250 kSa/s		500 kSa/s	
Scan list memory	Up to 100 selectable channel entries			
Programmable bipolar input range	$\pm 10\text{ V}$, $\pm 5\text{ V}$, $\pm 2.5\text{ V}$, $\pm 1.25\text{ V}$			
Programmable unipolar input range	0 to 10 V, 0 to 5 V, 0 to 2.5 V, 0 to 1.25 V			
Input coupling	DC			
Input impedance	1 G Ω / 100 pF			
Operational common mode voltage range	$\pm 7.5\text{ V}$ maximum			
Overvoltage protection	Power on: Continuous $\pm 30\text{ V}$, Power off: Continuous $\pm 15\text{ V}$			
Trigger sources	External analog/digital trigger, SSI/Star Trigger ^[1]			
Trigger modes	Pre-trigger, delay-trigger, post-trigger and middle-trigger			
FIFO buffer size	Up to 8 MSa			
Analog Output				
Resolution	16 bits	N/A	16 bits	N/A
Number of channels	2	N/A	2	N/A
Maximum update rate	1 MSa/s	N/A	1 MSa/s	N/A
Output ranges	0 to 10 V, $\pm 10\text{ V}$, 0 to AO_EXT_REF, $\pm\text{AO_EXT_REF}$ ^[2]	N/A	0 to 10 V, $\pm 10\text{ V}$, 0 to AO_EXT_REF, $\pm\text{AO_EXT_REF}$ ^[2]	N/A
Output coupling	DC	N/A	DC	
Output impedance	0.1 Ω Typical	N/A	0.1 Ω Typical	N/A
Stability	Any passive load up to 1500 pF	N/A	Any passive load up to 1500 pF	N/A
Power on state	0 V steady state	N/A	0 V steady state	N/A
Trigger sources	External analog/digital trigger, SSI/Star Trigger ^[1]	N/A	External analog/digital trigger, SSI/Star Trigger ^[1]	N/A
Trigger modes	Post-trigger and delay-trigger	N/A	Post-trigger and delay-trigger	N/A
FIFO buffer size	1 channel: Maximum 8 MSa 2 channels: Maximum 4 MSa/ch	N/A	1 channel: 8 MSa 2 channels: Maximum 4 MSa/ch	N/A
Function generation mode	Sine-wave, square-wave, triangle, sawtooth and noise waveform	N/A	Sine-wave, square-wave, triangle, sawtooth and noise waveform	N/A
Digital I/O				
Number of channels	24-bit programmable input/output			
Compatibility	TTL			
Input voltage	$V_{IL} = 0.7\text{ V max}$, $I_{IL} = 10\ \mu\text{A max}$ $V_{IH} = 2.0\text{ V min}$, $I_{IH} = 10\ \mu\text{A max}$			
Input voltage range	-0.5 V to +5.5 V			
Output voltage	$V_{OL} = 0.45\text{ V max}$, $I_{OL} = 8\text{ mA max}$ $V_{OH} = 2.4\text{ V min}$, $I_{OH} = 400\ \mu\text{A max}$			

General Purpose Digital Counter (GPC)	
Maximum count	(2 ³¹ -1) bits
Number of channels	2 independent up/down counter
Compatibility	TTL
Clock source	Internal or external
Base clock available	48 MHz
Maximum clock source frequency	12 MHz
Input frequency range	0.1 Hz to 6 MHz at 50% duty cycle
Pulse width measurement range	0.167 μ s to 178.956 s
Analog trigger	
Trigger source	All analog input channels, External analog trigger (EXTA_TRIG)
Trigger level	\pm Full Scale for internal; \pm 10 V for external
Trigger conditions	Above high, below low and window (software selectable)
Trigger level resolution	8 bits
Bandwidth	400 kHz
Input Impedance for EXTA_TRIG	20 k Ω
Coupling	DC
Overvoltage Protection	Continuous for \pm 35 Vmaximum
Digital Trigger	
Compatibility	TTL/CMOS
Response	Rising or falling edge
Pulse width	20 ns minimum
Calibration ^[3]	
On board reference voltage	5 V
Temperature drift	\pm 2 ppm/ $^{\circ}$ C
Stability	\pm 6 ppm/1000 hrs
General	
Remote interface	USB 2.0 High Speed
Device class	USBTMC Class Device
Programmable interface	Standard Commands for Programmable Instruments (SCPI) and IVI-COM

[1] System Scynchronous Interface (SSI) and Star Trigger commands are used when the modular device is incorporated into the chassis.

[2] Maximum external reference voltage for analog output channels (AO_EXT_REF) is \pm 10 V.

[3] 20 minutes warm-up time is recommended.

High Density Multifunction USB DAQ

Model Number	U2355A	U2356A	U2331A
Analog Input			
Resolution	16 bits, no missing codes		12 bits, no missing codes
Number of channels	64 SE/32 DI (software selectable/ch)		
Maximum sampling rate	250 kSa/s	500 kSa/s	3 MSa/s (single channel) 1 MSa/s (multi channels)
Scan list memory	Up to 100 selectable channel entries		
Programmable bipolar input range	$\pm 10\text{ V}$, $\pm 5\text{ V}$, $\pm 2.5\text{ V}$, $\pm 1.25\text{ V}$		$\pm 10\text{ V}$, $\pm 5\text{ V}$, $\pm 2.5\text{ V}$, $\pm 1.25\text{ V}$, $\pm 1\text{ V}$, $\pm 0.5\text{ V}$, $\pm 0.25\text{ V}$, $\pm 0.2\text{ V}$, $\pm 0.05\text{ V}$
Programmable unipolar input range	0 to 10 V, 0 to 5 V, 0 to 2.5 V, 0 to 1.25 V		0 to 10 V, 0 to 5 V, 0 to 4 V, 0 to 2.5 V, 0 to 2 V, 0 to 1 V, 0 to 0.5 V, 0 to 0.4 V, 0 to 0.1V
Input coupling	DC		
Input impedance	1 G Ω / 100 pF		
Operational common mode voltage range	$\pm 7.5\text{ V}$ maximum		
Overvoltage protection	Power on: Continuous $\pm 30\text{ V}$; Power off: Continuous $\pm 15\text{ V}$		
Trigger sources	External analog/digital trigger, SSI/Star Trigger ⁽¹⁾		
Trigger modes	Pre-trigger, delay-trigger, post-trigger and middle-trigger		
FIFO buffer size	Up to 8 MSa		
Analog Output			
Resolution	12 bits		
Number of channels	2		
Maximum update rate	1 MSa/s		
Output ranges	0 to 10 V, $\pm 10\text{ V}$, 0 to AO_EXT_REF, \pm AO_EXT_REF ⁽²⁾		
Output coupling	DC		
Output impedance	0.1 Ω Typical		
Stability	Any passive load up to 1500 pF		
Power on state	0 V steady state		
Trigger sources	External analog/digital trigger, SSI/Star Trigger ⁽¹⁾		
Trigger modes	Post-trigger and delay-trigger		
FIFO buffer size	1 channel: Maximum 8 MSa 2 channels: Maximum 4 MSa/ch		
Function generation mode	Sine-wave, square-wave, triangle, sawtooth and noise waveform		
Digital I/O			
Number of channels	24-bit programmable input/output		
Compatibility	TTL		
Input voltage	$V_{IL} = 0.7\text{ V}$ max, $I_{IL} = 10\ \mu\text{A}$ max $V_{IH} = 2.0\text{ V}$ min, $I_{IH} = 10\ \mu\text{A}$ max		
Input voltage range	-0.5 V to +5.5 V		
Output voltage	$V_{OL} = 0.45\text{ V}$ max, $I_{OL} = 8\text{ mA}$ max $V_{OH} = 2.4\text{ V}$ min, $I_{OH} = 400\ \mu\text{A}$ max		
General Purpose Digital Counter (GPC)			
Maximum count	$(2^{31}-1)$ bits		
Number of channels	2 independent up/down counter		
Compatibility	TTL		
Clock source	Internal or external		
Base clock available	48 MHz		
Maximum clock source frequency	12 MHz		
Input frequency range	0.1 Hz to 6 MHz at 50% duty cycle		
Pulse width measurement range	0.167 μs to 178.956 s		

Analog trigger	
Trigger source	All analog input channels, External analog trigger (EXTA_TRIG)
Trigger level	±Full Scale for internal; ±10 V for external
Trigger conditions	Above high, below low and window (software selectable)
Trigger level resolution	8 bits
Bandwidth	400 kHz
Input Impedance for EXTA_TRIG	20 kΩ
Coupling	DC
Overvoltage Protection	Continuous for ±35 V maximum
Digital Trigger	
Compatibility	TTL/CMOS
Response	Rising or falling edge
Pulse width	20 ns minimum
Calibration^[3]	
On board reference	5 V
Temperature drift	±2 ppm/°C
Stability	±6 ppm/1000 hrs
General	
Remote interface	USB 2.0 High Speed
Device class	USBTMC Class Device
Programmable interface	Standard Commands for Programmable Instruments(SCPI) and IVI-COM

[1] System Synchronous Interface (SSI) and Star Trigger commands are used when the modular device is incorporated into the chassis.

[2] Maximum external reference voltage for analog output channels (AO_EXT_REF) is ±10 V.

[3] 20 minutes warm-up time is recommended.

ELECTRICAL MEASUREMENT SPECIFICATIONS

Basic Multifunction USB DAQ

Analog Input Measurement ⁽¹⁾				
Model Number	U2351A/U2352A		U2353A/U2354A	
Function	23 °C ± 5 °C	0 °C to 18 °C 28 °C to 45 °C	23 °C ± 5 °C	0 °C to 18 °C 28 °C to 45 °C
Offset Error	±1 mV	±5 mV	±1 mV	±5 mV
Gain Error	±2 mV	±5 mV	±2 mV	±5 mV
-3dB small signal bandwidth	760 kHz		1.5 MHz	
1% THD large signal bandwidth	300 kHz		300 kHz	
System noise	1 mVrms	2 mVrms	1 mVrms	2.5 mVrms
CMRR	62 dB		62 dB	
Spurious-free dynamic range (SFDR)	88 dB		82 dB	
Signal-to-noise and distortion ratio (SINAD)	80 dB		78 dB	
Total harmonic distortion (THD)	-90 dB		-88 dB	
Signal-to-noise ration (SNR)	80 dB		78 dB	
Effective number of bits (ENOB)	13		12.6	

Analog Output Measurement ⁽¹⁾		
Model Number	U2351A/U2353A	
Function	23 °C ± 5 °C	0 °C to 18 °C 28 °C to 45 °C
Offset Error	±1 mV	±4 mV
Gain Error	±4 mV	±5 mV
Slew rate	19 V/μs	
Rise time	0.7 μs	0.8 μs
Fall time	0.7 μs	0.8 μs
Settling time to 1% output error	4 μs	
Driving capability	5 mA	
Glitch energy	5 ns-V (typical), 80 ns-V (maximum)	

High Density Multifunction USB DAQ

Analog Input Measurement ⁽¹⁾						
Model Number	U2355A		U2356A		U2331A	
Function	23 °C ± 5 °C	0 °C to 18 °C 28 °C to 45 °C	23 °C ± 5 °C	0 °C to 18 °C 28 °C to 45 °C	23 °C ± 5 °C	0 °C to 18 °C 28 °C to 45 °C
Offset Error	±1 mV	±2 mV	±1 mV	±2 mV	±2 mV	±3 mV
Gain Error	±2 mV	±3 mV	±2 mV	±6 mV	±6 mV	±7.5 mV
-3dB small signal bandwidth	760 kHz		1.3 MHz		1.2 MHz	
1% THD large signal bandwidth	400 kHz		400 kHz		N/A	
System noise	1 mVrms	2 mVrms	1 mVrms	4 mVrms	3 mVrms	5 mVrms
CMRR	64 dB		61 dB		62 dB	
Spurious-free dynamic range (SFDR)	88 dB		86 dB		71 dB	
Signal-to-noise and distortion ratio (SINAD)	80 dB		78 dB		72 dB	
Total harmonic distortion (THD)	-90 dB		-90 dB		-76 dB	
Signal-to-noise ration (SNR)	80 dB		78 dB		72 dB	
Effective number of bits (ENOB)	13		12.6		11.6	

Analog Output Measurement ^[1]				
Model Number	U2355A/U2356A		U2331A	
Function	23 °C ± 5 °C	0 °C to 18 °C 28 °C to 45 °C	23 °C ± 5 °C	0 °C to 18 °C 28 °C to 45 °C
Offset Error	±1 mV	±4 mV	±1.5 mV	±3 mV
Gain Error	±4 mV	±5 mV	±4 mV	±5 mV
Slew rate	19 V/μs		19 V/μs	
Rise time	0.7 μs	0.8 μs	0.7 μs	0.8 μs
Fall time	0.7 μs	0.8 μs	0.7 μs	0.8 μs
Settling time to 1% output error	4 μs		4 μs	
Driving capability	5 mA		5 mA	
Glitch energy	5 ns-V(Typical), 80 ns-V (Maximum)		5 ns-V(Typical), 80 ns-V (Maximum)	

[1] Specifications are for 20 minutes of warm-up time, calibration temperature at 23 °C and input range of ±10 V.

TEST CONDITIONS

Dynamic Range Test	Model Number	Test Conditions ^[2]
SFDR, THD, SINAD, SNR, ENOB	U2351A	Sampling rate: 250 kSa/s
	U2352A	Fundamental frequency: 2.4109 kHz
	U2355A	Number of points: 8192
		Fundamental input voltage: FSR –1 dB FS
	U2353A	Sampling rate: 500 kSa/s
	U2354A	Fundamental frequency: 4.974 kHz
	U2356A	Number of points: 16384
		Fundamental input voltage: FSR –1 dB FS
	U2331A	Sampling rate: 3 MSa/s
	Fundamental frequency: 29.892 kHz	
	Number of points: 65536	
	Fundamental input voltage: FSR –1 dB FS	

Dynamic Range Test	Model Number	Test Conditions ^[2]
<ul style="list-style-type: none"> –3dB small signal bandwidth 1% THD large signal bandwidth 	U2351A	Sampling rate: 250 kSa/s
	U2352A	Input voltage:
	U2355A	<ul style="list-style-type: none"> –3dB small signal bandwidth 10% FSR 1% THD large signal bandwidth FSR –1 dB FS
	U2353A	Sampling rate: 500 kSa/s
	U2354A	Input voltage:
	U2356A	<ul style="list-style-type: none"> –3 dB small signal bandwidth 10% FSR 1% THD large signal bandwidth FSR –1 dB FS
	U2331A	Sampling rate: 3 MSa/s
		Input voltage:
		<ul style="list-style-type: none"> –3 dB small signal bandwidth 10% FSR 1% THD large signal bandwidth FSR –1 dB FS

[2] DUT setting at ±10 V bipolar.

GENERAL SPECIFICATIONS

REMOTE INTERFACE

- USB 2.0 High Speed
- USBTMC Class Device

POWER CONSUMPTION

- +12 VDC, 550 mA maximum

OPERATING ENVIRONMENT

- Operating temperature from 0 °C to +55 °C
- Relative humidity at 15% to 85% RH (non-condensing)
- Altitude up to 4600 meters

STORAGE COMPLIANCE

- 20 °C to +70 °C

SAFETY COMPLIANCE

Certified with:

- IEC 61010-1:2001/EN 61010-1:2001 (2nd Edition)
- USA: UL61010-1: 2004
- Canada: CSA C22.2 No.61010-1:2004

EMC COMPLIANCE

Certified with:

- IEC/EN 61326-1 1998
- CISPR 11: 1990/EN55011:1991, Group 1, Class A
- CANADA: ICES-001: 1998
- Australia/New Zealand: AS/NZS 2064.1

SHOCK and VIBRATION

- Tested to IEC/EN 60068-2

IO CONNECTOR

- 68-pin female VHDCI Type

DIMENSION (WxDxH)

- 120 mm x 182.40 mm x 44 mm (with plastic casing)
- 105 mm x 174.54 mm x 25 mm (without plastic casing)

WEIGHT

- 565 g (with plastic casing)
- 400 g (without plastic casing)

WARRANTY

- One year

SOFTWARE REQUIREMENTS

Agilent connectivity software included

Agilent IO Libraries Suite 14.2

Minimum system requirements (IO libraries and drivers)

PC hardware	500 MHz Pentium III or higher, 256 MB RAM,
Operating System	40 GB hard disk space, CD-ROM drive Windows 2000 and above

Computer Interface

USB 2.0 high Speed

Software driver support for programming languages

Software driver : IVI-COM

Compatible with programming environments:

- Agilent VEE, Agilent T&M Toolkit
- Microsoft Visual Studio.NET, C/C++
- Visual Basic 6
- LabVIEW
- MATLAB

PRODUCT OVERVIEW


FRONT VIEW



REAR VIEW



TOP VIEW

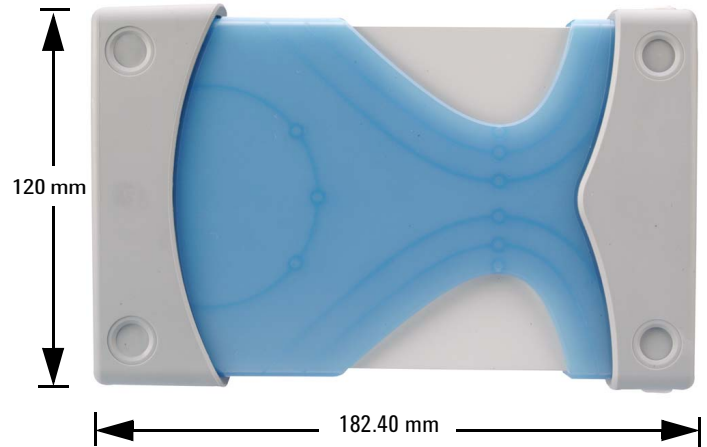

Standard Shipped Components:

- USB Interface Cable
- L-Mount Kit (used with modular instrument chassis)
- Quick Start Guide
- Certificate of Calibration (CoC)
- Product Reference CD-ROM
- Agilent IO Libraries Suite 14.2 CD-ROM

Optional Accessories:

- U2901A - Terminal Board with SCSI-II 68 pin connector with 1 meter cable
- U2902A - Terminal Board with SCSI-II 68 pin connector with 2 meter cable
- U2781A 6-slot USB Modular Instrument Chassis

Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you receive your new Agilent equipment, we can help verify that it works properly and help with initial product operation.

Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.



Agilent Direct

www.agilent.com/find/agilentdirect

Quickly choose and use your test equipment solutions with confidence.

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Phone or Fax

United States:

(tel) 800 829 4444

(fax) 800 829 4433

Canada:

(tel) 877 894 4414

(fax) 800 746 4866

China:

(tel) 800 810 0189

(fax) 800 820 2816

Europe:

(tel) 31 20 547 2111

Japan:

(tel) (81) 426 56 7832

(fax) (81) 426 56 7840

Korea:

(tel) (080) 769 0800

(fax) (080) 769 0900

Latin America:

(tel) (305) 269 7500

Taiwan:

(tel) 0800 047 866

(fax) 0800 286 331

Other Asia Pacific Countries:

(tel) (65) 6375 8100

(fax) (65) 6755 0042

Email: tm_ap@agilent.com

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2006

Printed in USA, 29 September, 2006

5989-5626EN