

# RS-232 (DB9) Link Tester



## Description

72-9265 is RS-232 link tester. 72-9265 can test the signal of PC to RS-232 Printer or RS-232 Terminate. It is standard DB-9 Male to DB-9 Female link tester. 72-9265 use 9 pcs LED to show the test result.


## Features

- No power required and test RS-232 interface
- RS-232 Female / Male Changer (extend function)
- Support RS-232 on line Simple test. Support plug and play
- Appeared with 2 colours LED, easy to check data transfer and receiver

## RS-232 / DB-9 / LED Pin assignment (full pin test)

| RS-232 Signal Name                         | DB 9 Female | DB 9 Male   | LED |
|--|-------------|-------------|-----|
| FG (Frame Ground)*                         | Metal case* | Metal case* |     |
| CD (Carrier Detect)                        | 1           | 1           | DCD |
| RD (Receive Data)                          | 2           | 2           | RXD |
| TD (Transmit Data)                         | 3           | 3           | TXD |
| DTR (Data Terminal Ready)                  | 4           | 4           | DTR |
| SG (Signal Ground)                         | 5           | 5           | GND |
| DSR (Data Set Ready)                       | 6           | 6           | SDR |
| RTS (Request To Send)                      | 7           | 7           | RTS |
| CTS (Clear To Send)                        | 8           | 8           | CTS |
| RI (Ring Indicator)                        | 9           | 9           | RI  |
| Single / TTL out 1 - LED appear Green (V-) |             |             |     |
| Single / TTL out 0 - LED appear Red (V+)   |             |             |     |

## Diagram Connection

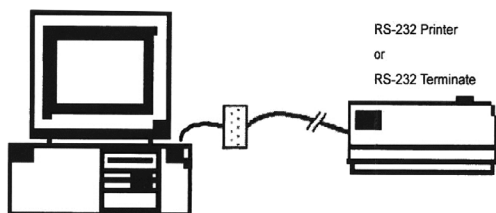

## Part Number Table

| Description                            | Part Number |
|--|-------------|
| Cable Tester, RS232/DB9 In Line Signal | 72-9265     |

**Important Notice :** This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. TENMA is the registered trademark of Premier Farnell Limited 2019.

Newark.com/exclusive-brands  
 Farnell.com/exclusive-brands  
 Element14.com/exclusive-brands

