

# MOS FET Relays

# G3VM-21LR

**World's Smallest SSOP Package MOS FET Relay\*  
with Low Output Capacitance and ON Resistance  
(C<sub>X</sub>R = 5pF•Ω) in a 20-V Load Voltage Model**

- Output capacitance of 1 pF (typical) allows high frequency applications.
- RoHS Compliant.

\*Information correct as of May, 2007, according to data obtained by OMRON.



**Note:** The actual product is marked differently from the image shown here.

## ■ Application Examples

- Semiconductor inspection tools
- Measurement devices and Data loggers
- Broadband systems


## ■ List of Models

Contact form	Terminals	Load voltage (peak value)	Model	Number per tape
SPST-NO	Surface-mounting terminals	20 VAC	G3VM-21LR	---
			G3VM-21LR(TR)	1,500
			G3VM-21LR(TR05)	500
			G3VM-21LR(TR10)	1,000

## ■ Dimensions

**Note:** All units are in millimeters unless otherwise indicated.

**G3VM-21LR**

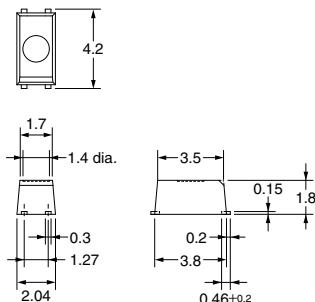


**Note:** A tolerance of ±0.1 mm applies to all dimensions unless otherwise specified.

**Note:** The actual product is marked differently from the image shown here.

Weight: 0.03 g


## ■ Terminal Arrangement/Internal Connections (Top View)

**G3VM-21LR**



## ■ Actual Mounting Pad Dimensions (Recommended Value, Top View)

**G3VM-21LR**



## ■ Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )


Item	Symbol	Rating	Unit	Measurement conditions
Input	LED forward current	$I_F$	50	mA
	Repetitive peak LED forward current	$I_{FP}$	1	A
	LED forward current reduction rate	$\Delta I_F/\text{ }^\circ\text{C}$	-0.5	mA/ $^\circ\text{C}$
	LED reverse voltage	$V_R$	5	V
	Connection temperature	$T_j$	125	$^\circ\text{C}$
Output	Load voltage (AC peak/DC)	$V_{OFF}$	20	V
	Continuous load current	$I_O$	160	mA
	ON current reduction rate	$\Delta I_{ON}/\text{ }^\circ\text{C}$	-1.6	mA/ $^\circ\text{C}$
	Connection temperature	$T_j$	125	$^\circ\text{C}$
Dielectric strength between input and output (See note 1.)	$V_{I-O}$	1,500	$V_{rms}$	AC for 1 min
Operating temperature	$T_a$	-20 to +85	$^\circ\text{C}$	With no icing or condensation
Storage temperature	$T_{stg}$	-40 to +125	$^\circ\text{C}$	With no icing or condensation
Soldering temperature (10 s)	---	260	$^\circ\text{C}$	10 s

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

## ■ Electrical Characteristics ( $T_a = 25^\circ\text{C}$ )

Item	Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions
Input	LED forward voltage	$V_F$	1.0	1.15	1.3	V $I_F = 10 \text{ mA}$
	Reverse current	$I_R$	---	---	10	$\mu\text{A}$ $V_R = 5 \text{ V}$
	Capacity between terminals	$C_T$	---	15	---	pF $V = 0, f = 1 \text{ MHz}$
	Trigger LED forward current	$I_{FT}$	---	---	4	mA $I_O = 100 \text{ mA}$
Output	Maximum resistance with output ON	$R_{ON}$	---	5	8	$\Omega$ $I_F = 5 \text{ mA}, I_O = 160 \text{ mA}, t = 10 \text{ ms}$
	Current leakage when the relay is open	$I_{LEAK}$	---	0.2	1.0	nA $V_{OFF} = 20 \text{ V}, T_a = 50^\circ\text{C}$
	Capacity between terminals	$C_{OFF}$	---	1.0	2.5	pF $V = 0, f = 100 \text{ MHz}, t < 1 \text{ s}$
Capacity between I/O terminals	$C_{I-O}$	---	0.8	---	pF	$f = 1 \text{ MHz}, V_s = 0 \text{ V}$
Insulation resistance	$R_{I-O}$	1,000	---	---	M $\Omega$	$V_{I-O} = 500 \text{ VDC}, \text{RoH} \leq 60\%$
Turn-ON time	$t_{ON}$	---	0.06	0.5	ms	$I_F = 10 \text{ mA}, R_L = 200 \Omega, V_{DD} = 20 \text{ V}$ (See note 2.)
Turn-OFF time	$t_{OFF}$	---	0.12	0.5	ms	

Note: 2. Turn-ON and Turn-OFF Times










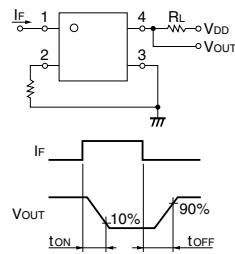


## ■ Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.

Item	Symbol	Minimum	Typical	Maximum	Unit
Load voltage (AC peak/DC)	$V_{DD}$	---	---	20	V
Operating LED forward current	$I_F$	7	---	30	mA
Continuous load current (AC peak/DC)	$I_O$	---	---	160	mA
Operating temperature	$T_a$	25	---	60	$^\circ\text{C}$

## ■ Engineering Data

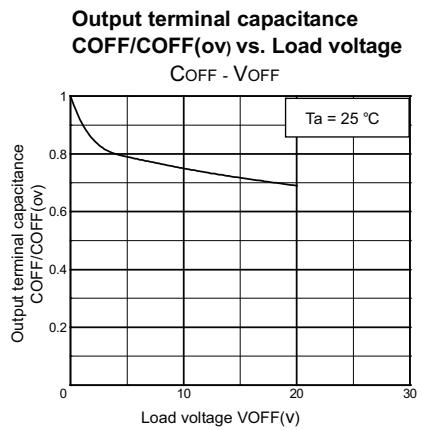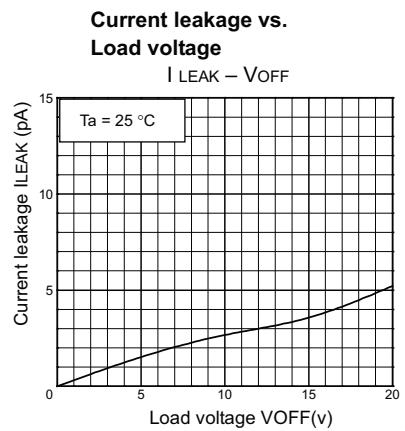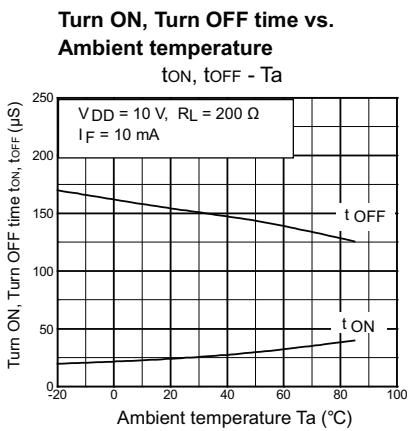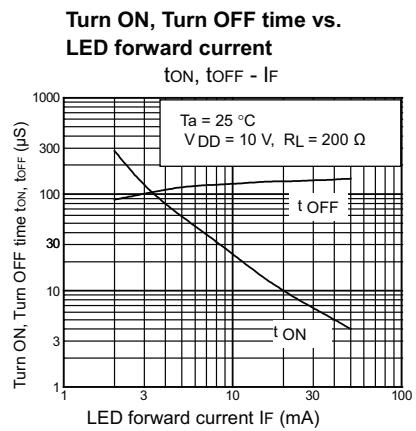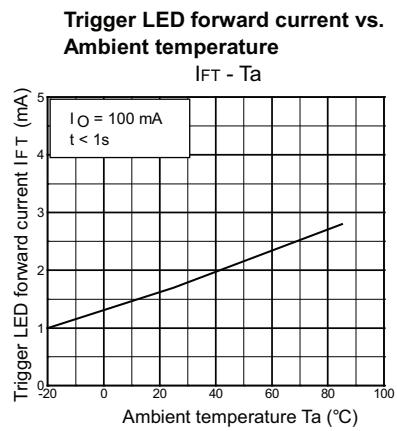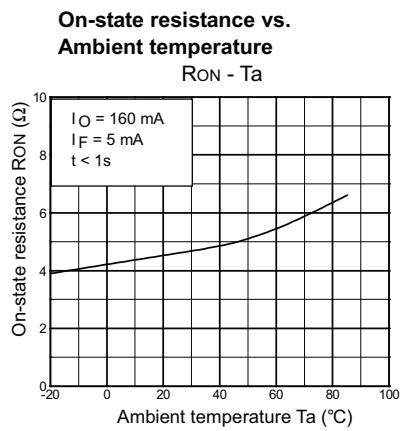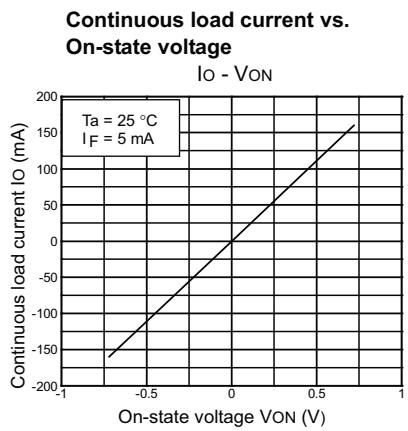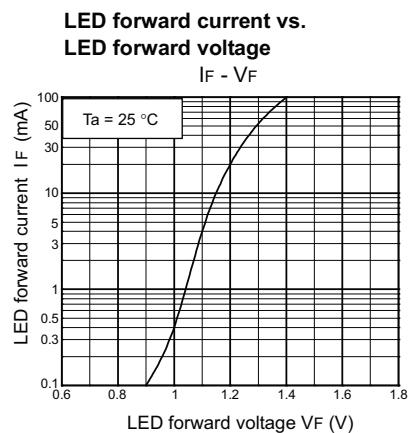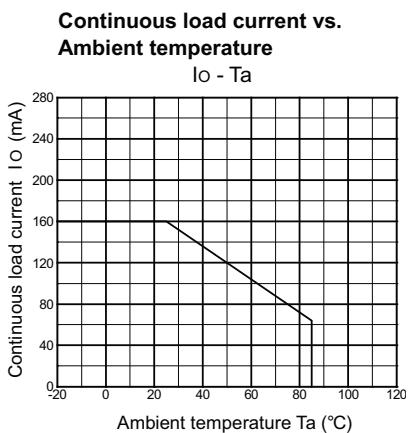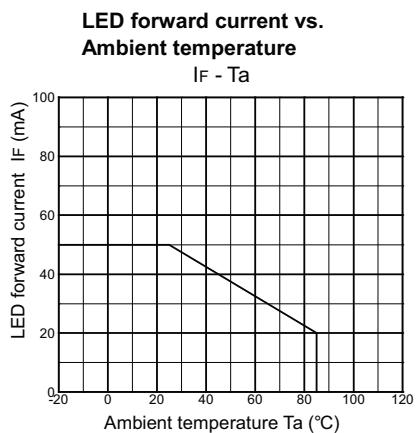

All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at [http://www.components.omron.com/components/web/webfiles.nsf/sales\\_terms.html](http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html)

**ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.**

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.



**OMRON ELECTRONIC  
COMPONENTS LLC**  
55 E. Commerce Drive, Suite B  
Schaumburg, IL 60173

**847-882-2288**

Cat. No. X302-E-1

12/10

Specifications subject to change without notice

**OMRON ON-LINE**

Global - <http://www.omron.com>  
USA - <http://www.components.omron.com>

Printed in USA

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Omron](#):

[G3VM-21LR\(TR\)](#) [G3VM-21LR\(TR05\)](#) [G3VM-21LR\(TR10\)](#)