


Transformers

Chassis Mounting

multicompPRO

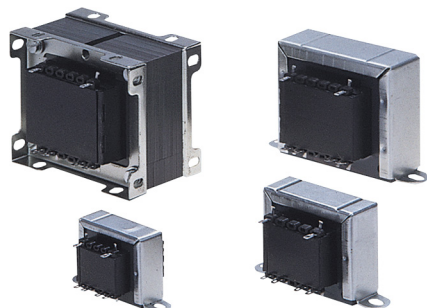


Features:


- Single 230V primary winding
- Double section imperial bobbin
- 6 to 200VA power, 50/60Hz
- Temperature class B (130°C)
- Dielectric strength 3,750VRMS
- Manufactured and tested in accordance with EN60950 and EN61558

Specifications:

Max. Winding Temperature : 55°C
 Overall Insulation Rating : >50MΩ (at 500V, 20°C)
 Flash Test (isolation test) : Primary/Secondary/Lamination 2.4KVRMS
 Winding Wire : Polyurethane coated IEC317 Grade 1
 Tape : 3M No 56 or 3M No 1350Y Thermosetting
 Core : 400/50
 Finish : Ultimeg 3.72 Clear

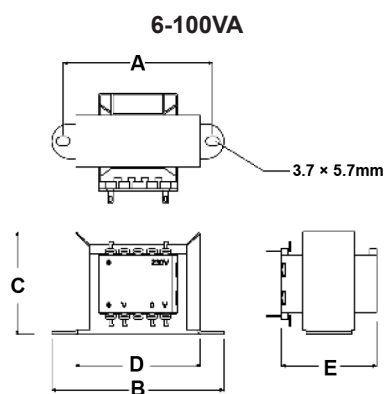

6-50 VA L-Clamps

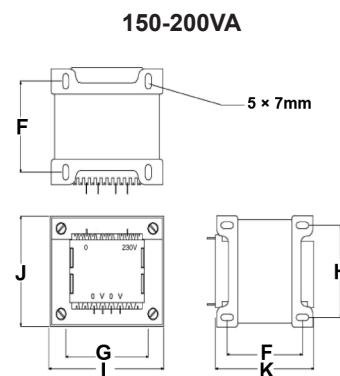

75 - 200VA Universal end frames

VA Rating	Reg % 2	A ±1	B ±1	C ±1	D ±1	E ±1	Weight
6	24	55	68	37	45	36	170g
12	16	74	90	50	60	45	390g
20	12	74	90	50	60	52	530g
50	9	94	106	65	79	58	985g

VA Rating	Reg % 2	F ±1	H ±1	I ±1	J ±1	K ±1	Weight
100	10	45	57	89	75	65	1,550g
150	9	62	63	88	74	78	2,100g
200	8	68	72	102	85	85	2,750g

Dimensions : Millimetres

Newark.com/multicomp-pro
 Farnell.com/multicomp-pro
 sg.element14.com/b/multicomp-pro

multicompPRO

Transformers

Chassis Mounting

multicompPRO

Single Primary

Part Number	VA	Output V AC
CTFCS6-5	6	5
CTFCS6-6		6
CTFCS6-9		9
CTFCS6-12		12
CTFCS6-15		15
CTFCS6-18		18
CTFCS6-20		20
CTFCS6-24		24
CTFCS12-6	12	6
CTFCS12-9		9
CTFCS12-12		12
CTFCS12-20		20
CTFCS12-24		24

Part Number	VA	Output V AC
CTFCS20-6	20	6
CTFCS20-9		9
CTFCS20-12		12
CTFCS20-15		15
CTFCS20-18		18
CTFCS20-20		20
CTFCS20-24		24
CTFCS50-6	50	6
CTFCS50-12		12
CTFCS50-15		15
CTFCS50-18		18
CTFCS50-24		24

Part Number	VA	Output V AC
CTFCS100-9U	100	9
CTFCS100-12U		12
CTFCS100-18U		18
CTFCS100-24U		24
CTFCS100-50U		50
CTFCS150-12U	150	12
CTFCS150-18U		18
CTFCS150-24U		24
CTFCS200-9U	200	9
CTFCS200-18U		18
CTFCS200-24U		24
CTFCS200-50U		50

Part Number Table

Description	Part Number
Transformer, 6VA, 2 × 5V	CTFCS6-5
Transformer, 6VA, 2 × 6V	CTFCS6-6
Transformer, 6VA, 2 × 9V	CTFCS6-9
Transformer, 6VA, 2 × 12V	CTFCS6-12
Transformer, 6VA, 2 × 15V	CTFCS6-15
Transformer, 6VA, 2 × 18V	CTFCS6-18
Transformer, 6VA, 2 × 20V	CTFCS6-20
Transformer, 6VA, 2 × 24V	CTFCS6-24
Transformer, 12VA, 2 × 6V	CTFCS12-6
Transformer, 12VA, 2 × 9V	CTFCS12-9
Transformer, 12VA, 2 × 12V	CTFCS12-12
Transformer, 12VA, 2 × 20V	CTFCS12-20
Transformer, 12VA, 2 × 24V	CTFCS12-24
Transformer, 20VA, 2 × 6V	CTFCS20-6
Transformer, 20VA, 2 × 9V	CTFCS20-9
Transformer, 20VA, 2 × 12V	CTFCS20-12
Transformer, 20VA, 2 × 15V	CTFCS20-15
Transformer, 20VA, 2 × 18V	CTFCS20-18
Transformer, 20VA, 2 × 20V	CTFCS20-20

Description	Part Number
Transformer, 20VA, 2 × 24V	CTFCS20-24
Transformer, 50VA, 2 × 6V	CTFCS50-6
Transformer, 50VA, 2 × 12V	CTFCS50-12
Transformer, 50VA, 2 × 15V	CTFCS50-15
Transformer, 50VA, 2 × 18V	CTFCS50-18
Transformer, 50VA, 2 × 24V	CTFCS50-24
Transformer, 100VA, 2 × 9V	CTFCS100-9U
Transformer, 100VA, 2 × 12V	CTFCS100-12U
Transformer, 100VA, 2 × 18V	CTFCS100-18U
Transformer, 100VA, 2 × 24V	CTFCS100-24U
Transformer, 100VA, 2 × 50V	CTFCS100-50U
Transformer, 150VA, 2 × 12V	CTFCS150-12U
Transformer, 150VA, 2 × 18V	CTFCS150-18U
Transformer, 150VA, 2 × 24V	CTFCS150-24U
Transformer, 200VA, 2 × 9V	CTFCS200-9U
Transformer, 200VA, 2 × 18V	CTFCS200-18U
Transformer, 200VA, 2 × 24V	CTFCS200-24U
Transformer, 200VA, 2 × 50V	CTFCS200-50U

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicompPRO