



FEATURES


- Low-profile surface mount design
- Inductance range from 90nH to 155nH
- Rated current up to 80A
- Halogen free
- Custom inductance values available
- RoHS compliant

PRODUCT OVERVIEW

The 3000D series are a range of high-current, surface-mount inductors, suited to a variety of applications. The products are designed for noise suppression in high-frequency, high-current switching power supplies, DC-DC converters, DC-AC inverters and VRMs.

The 3000D series is rated to MSL 1, and is compatible with a peak reflow solder temperature of 245°C as per J-STD-020.

PIN CONNECTIONS (TOP VIEW)



SELECTION GUIDE

Order Code	Inductance (100kHz, 0.1V)	I_{DC}^3	I_{SAT} (Typ.) ⁴		DC Resistance
	1&2, 2&3	1&3	1&2, 2&3		1&2, 2&3
	±10%	Typ.	25°C	125°C	±5%
	nH	A	A	A	mΩ
30900DC	90	40	80	65	0.28
30111DC	105	40	72	59	0.28
30131DC	125	40	60	49	0.28
30161DC	155 ±15%	40	46	38	0.28

ABSOLUTE MAXIMUM RATINGS


Operating temperature range	-40°C to +125°C
Storage temperature range	-40°C to +125°C

SOLDERING INFORMATION¹

Peak reflow solder temperature	245°C
Pin finish	Pure tin
Moisture sensitivity level ²	1


Mechanical Dimensions

Mechanical Dimensions

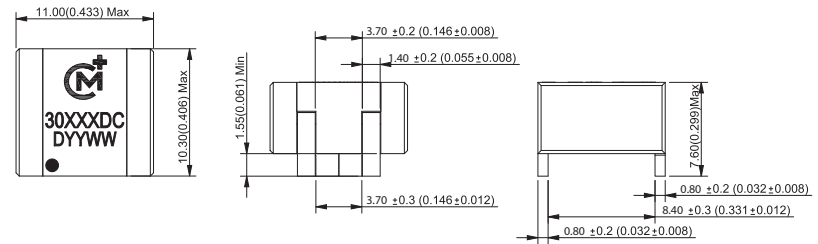

Weight Typ. = 2.9g

Recommended Pad Layout

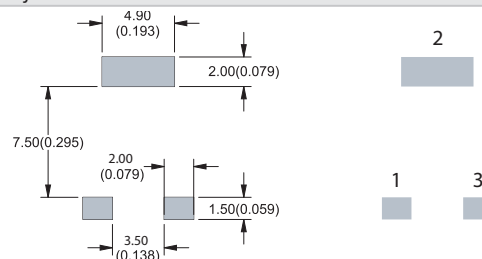

Unless otherwise stated, all dimensions in mm (inches)

Specifications typical at $T_A = 25^\circ\text{C}$

1 For further information, please visit www.murata-ps.com/rohs

2 Representative samples of the product were subjected to the conditioning described in IPC/JEDEC J-STD-020 and passed electrical testing, package coplanarity and visual inspection which revealed no external cracks or changes in package body flatness.

3 I_{DC} is when its temperature reaches 50°C above ambient. Care must be taken to ensure the component temperature does not exceed the absolute maximum rating.

4 I_{SAT} is the value at which the inductance falls to 80% of its nominal value.




For full details go to
www.murata-ps.com/rohs

ENVIRONMENTAL VALIDATION TESTING





The following tests have been conducted on this product series, as part of our design verification process. The datasheet characteristics specify user operating conditions for this series, please contact Murata if further information about the tests is required.

Test	Standard	Condition
Temperature Cycling	MIL-STD-883 Method 1010, Condition B	10 cycles. -55°C to +125°C. The dwell time shall not be less than 10min.
Humidity bias	JEDEC JESD22-A101	85°C ± 2°C, 85% ± 5% R.H. for >1000 hours
High Temperature Storage life	JEDEC JESD22-A103, Condition A	125°C +10/-0°C for ≥1000 hours
Vibration	MIL-STD-883 Method 2007, Condition A	20G for 5 minutes with 4 repetitions, the entire frequency (20 to 2000 Hz and return to 20Hz) shall be traversed in not less than 4 minutes. This cycle shall be performed 4 times in each of the orientations X, Y, and Z (total of 12 times)
Shock	Based on MIL-STD-883 Method 2002, Condition A	5 pulses 50G peak, 1ms, x, y, z axes bi-directional
Solderability	EIA/IPC/ECA J-STD-002 Test S1	Parts are pre-conditioned in a steam ager for 8 hours at a temperature of 93°C, within 72 hours they are dipped in flux for 10 seconds. Followed by reflow at 245°C ±5°C (96SC tin/silver/copper)
Solvent cleaning	Resistance to cleaning agents	Solvent – Novec 71IPA & Topklean EL-20A. Pulsed ultrasonic immersion 45°C- 65°C
Moisture sensitivity level (MSL 1)	Based on IPC/JEDEC J-STD-020	Bake samples at 125 +5/-0°C for 24 hours minimum before conditioning in the temperature/humidity chamber for 168 hours at 85°C/85%RH and Pb Free JEDEC Max profile conditioning. Subjected to 3 cycles with electrical testing, co-planarity inspection before and after.

TEMPERATURE Vs CURRENT

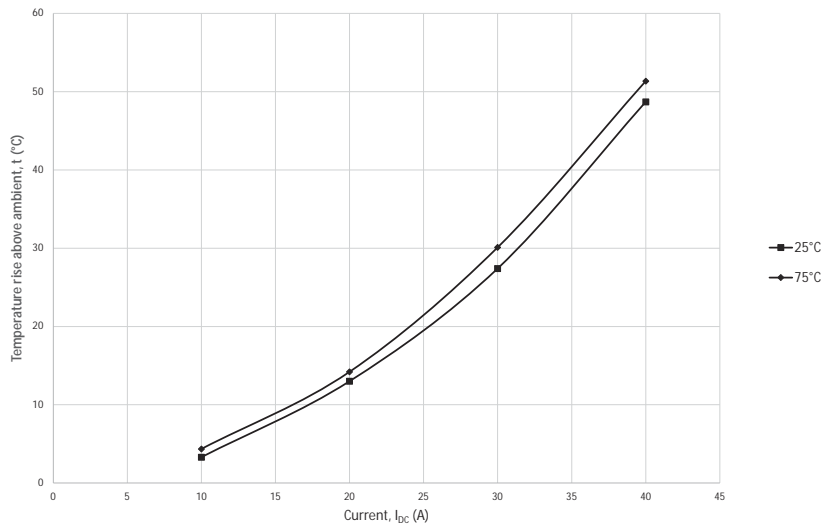


INDUCTANCE Vs CURRENT

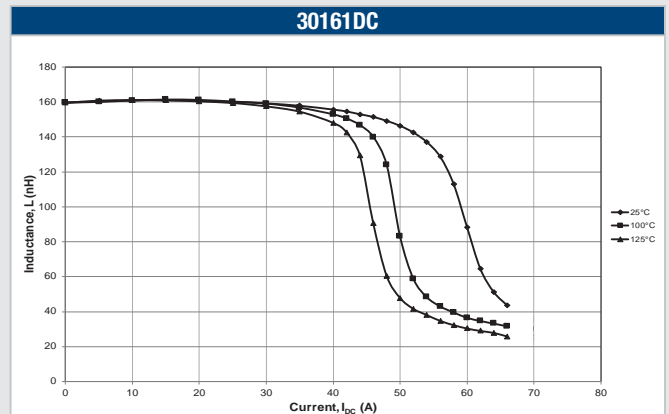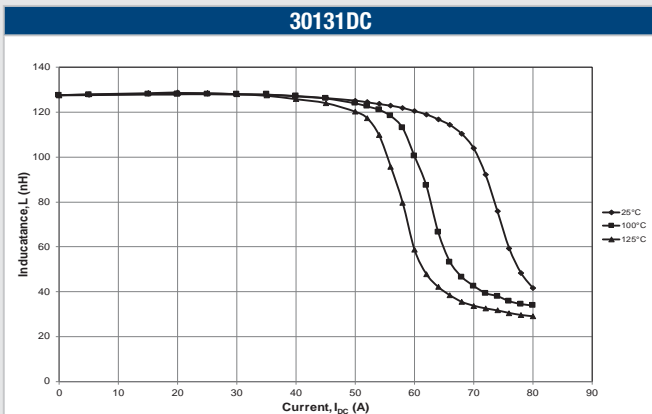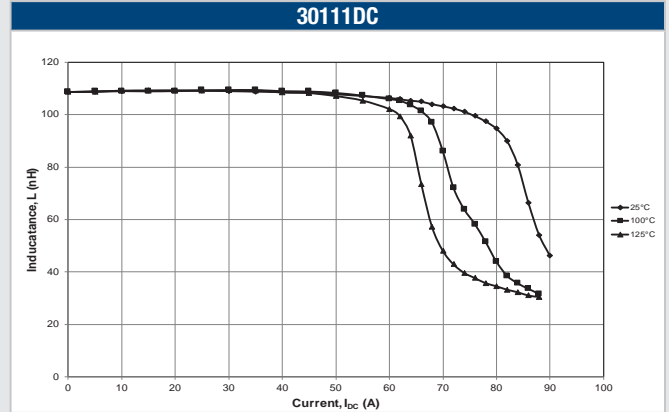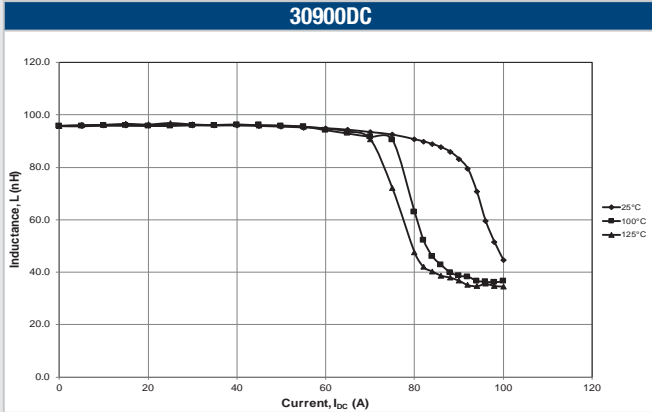


PACKAGE SPECIFICATIONS

Reel Dimensions

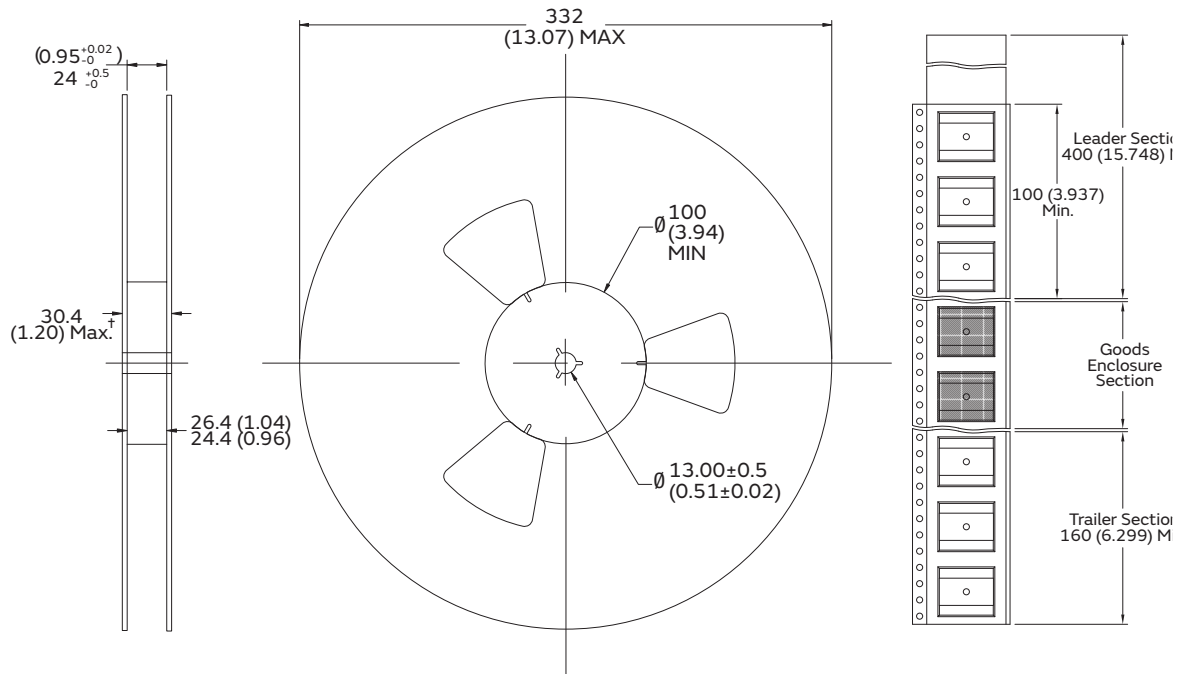

Reel Dimensions

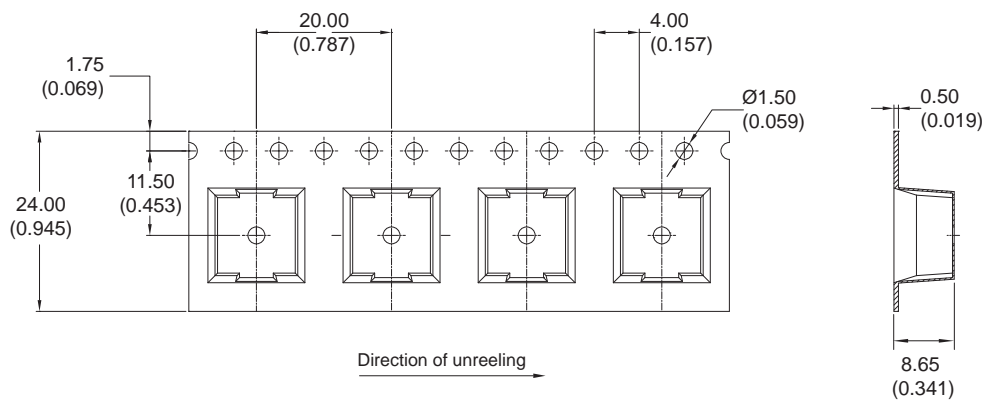

Reel quantity: 300

DISCLAIMER

Unless otherwise stated in the datasheet, all products are designed for standard commercial and industrial applications and NOT for safety-critical and/or life-critical applications.

Particularly for safety-critical and/or life-critical applications, i.e. applications that may directly endanger or cause the loss of life, inflict bodily harm and/or loss or severe damage to equipment/property, and severely harm the environment, a prior explicit written approval from Murata is strictly required. Any use of Murata standard products for any safety-critical, life-critical or any related applications without any prior explicit written approval from Murata shall be deemed unauthorised use.

These applications include but are not limited to:

- Aircraft equipment
- Aerospace equipment
- Undersea equipment
- Power plant control equipment
- Medical equipment
- Transportation equipment (automobiles, trains, ships, etc.)
- Traffic signal equipment
- Disaster prevention / crime prevention equipment
- Data Processing equipment

Murata makes no express or implied warranty, representation, or guarantee of suitability, fitness for any particular use/purpose and/or compatibility with any application or device of the buyer, nor does Murata assume any liability whatsoever arising out of unauthorised use of any Murata product for the application of the buyer. The suitability, fitness for any particular use/purpose and/or compatibility of Murata product with any application or device of the buyer remain to be the responsibility and liability of the buyer.

Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards that anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm, and take appropriate remedial actions. Buyer will fully indemnify and hold Murata, its affiliated companies, and its representatives harmless against any damages arising out of unauthorised use of any Murata products in any safety-critical and/or life-critical applications.

Remark: Murata in this section refers to Murata Manufacturing Company and its affiliated companies worldwide including, but not limited to, Murata Power Solutions.



This product is subject to the following [operating requirements](https://www.murata.com/en-eu/products/power/requirements) and the [Life and Safety Critical Application Sales Policy](https://www.murata.com/en-eu/products/power/requirements):

Refer to: <https://www.murata.com/en-eu/products/power/requirements>

Murata Power Solutions (Milton Keynes) Ltd. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.
© 2021 Murata Power Solutions (Milton Keynes) Ltd.