



Data

Electrical data

Ratings per IEC/EN

Rated current	18 A
---------------	------

Ex information

Rated current (Ex e II)	13.5 A
-------------------------	--------

Physical data

Width	14 mm / 0.551 inches
Height	2.5 mm / 0.098 inches
Jumper assignment	1-3

Material Data

Note (material data)

Subject to changes. Please also observe the further product documentation!



Information on material specifications can be found here

Color	light gray
Fire load	0.01 MJ
Weight	1.1 g

Commercial data

Product Group	16 (Rail Mounted Terminal Blocks with CCC)
eCl@ss 10.0	27-14-11-40
eCl@ss 9.0	27-14-11-40
ETIM 8.0	EC000489
ETIM 7.0	EC000489
PU (SPU)	200 (25) pcs
Packaging type	box
Country of origin	DE
GTIN	4044918508575
Customs tariff number	85366990990

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads**Documentation****Bid Text**

870-433 X81 - Datei	19 Feb 2019	xml 2.6 kB	Download
870-433 doc - Datei	4 Jan 2018	doc 24.1 kB	Download

Additional Information

		pdf 2.2 MB	Download
--	--	---------------	----------

CAD/CAE-Data**CAD data**

2D/3D Models 870-433

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

[URL](#) [Download](#)

CAE data

ZUKEN Portal 870-433

[URL](#) [Download](#)

WSCAD Universe 870-433

[URL](#) [Download](#)

EPLAN Data Portal 870-433

[URL](#) [Download](#)

Environmental Product Compliance

Compliance Search


Environmental Product Compliance 870-433

[URL](#) [Download](#)

Jumper; from 1 to 3; insulated; light gray

Installation Notes

Commoning

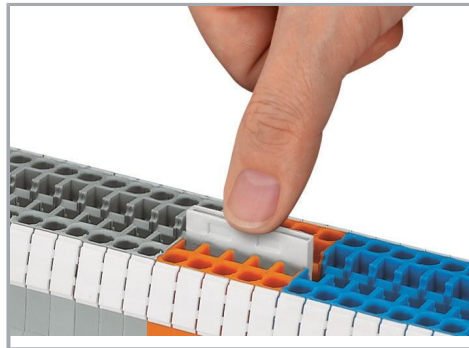

Commoning with push-in type jumper bars:

Two parallel jumper slots are accommodated in one terminal block.

Push jumper bars down firmly until fully inserted. When using multipole bars, push alternately on the right and then left side until installed.

Push-in type jumper bars 1 – 3 – 5 – 7 or
1 – – 4 – – 7

upon request

Subject to changes. Please also observe the further product documentation!