
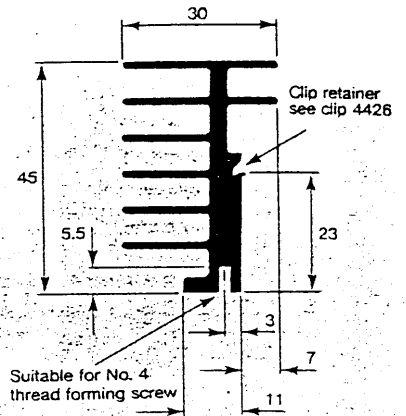


# KM Powersink

New heatsink using minimum board area features threaded slot for board assembly and a clip retaining feature to enable clip 4426 to be used for TO220 assembly.




Finish: Black anodised.  
Custom lengths available to order.

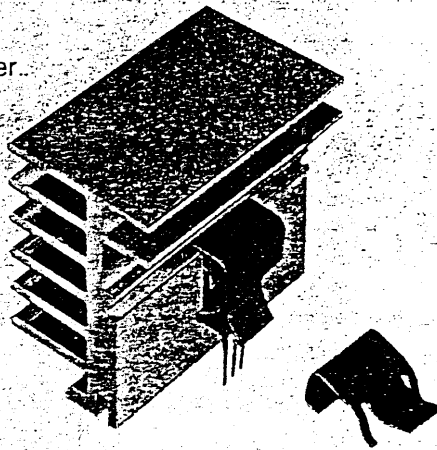

Pattern No.	Length mm	Thermal Rating $\Theta = ^\circ\text{C/W}$
KM50-1	50	5.0
KM75-1	75	3.7
KM100-1	100	2.9
KM150-1	150	2.2

# MP Powersink




Finish: Black anodised.  
Custom lengths available to order.

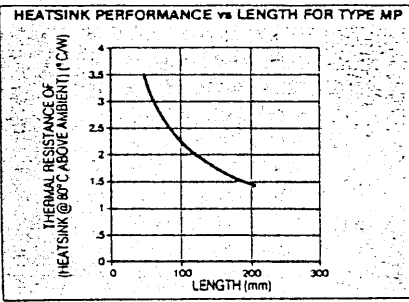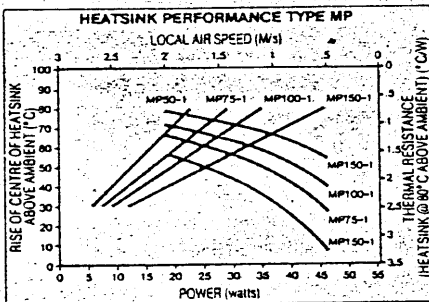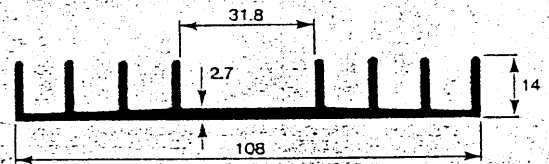

Pattern No.	Length mm	Thermal Rating $\Theta = ^\circ\text{C/W}$
MP50-1	50	3.5
MP75-1	75	2.7
MP100-1	100	2.3
MP150-1	150	1.7

# MQ Powersink

Finish: Black anodised.  
Custom lengths available to order.

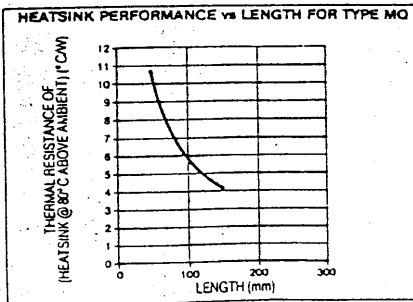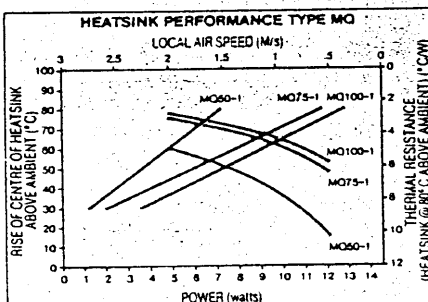

Pattern No.	Length mm	Thermal Rating $\Theta = ^\circ\text{C/W}$
MQ50-1	50	11.0
MQ75-1	75	7.5
MQ100-1	100	6.2