

# H3-faston module



Part number	02 54 903 1301
Specification	H3-faston module
HARTING eCatalogue	https://harting.com/02549031301

Image is for illustration purposes only. Please refer to product description.

#### Identification

Category	Connectors
Series	har-modular <sup>®</sup>
Identification	H3 module
Element	Cable connector
Specification	Female connector
Description of the contact	Straight

#### Version

Width of the module	10.16 mm
Termination method	Faston
Connection type	PCB to cable
Number of contacts	3

### Technical characteristics

Rated current	15 A
Clearance distance	4 mm in the module 4 mm to module edge 5.5 mm to touchable surface
Creepage distance	4 mm in the module 4 mm to module edge 6.4 mm to touchable surface
Insulation resistance	>10 <sup>11</sup> Ω
Limiting temperature	-55 +125 °C
Mating cycles	≥500



#### Technical characteristics

Degree of protection acc. to IEC 60529	IP20
Test voltage U <sub>r.m.s.</sub>	1.55 kV (contact-contact) 2.21 kV (Contact - accessible surfaces of cable connector) acc. to IEC 61984
Isolation group	I (600 ≤ CTI)
Hot plugging	No

#### Material properties

Material (insert)	Polyamide (PA)
Colour (insert)	Black
Material (contacts)	Copper alloy
Surface (contacts)	Silver plated
Material flammability class acc. to UL 94	V-0
RoHS	compliant
ELV status	compliant
China RoHS	е
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Not contained
California Proposition 65 substances	Not contained

## Specifications and approvals


Railway classification	F1/I2 acc. to NFF 16-101/102
------------------------	------------------------------

#### Commercial data

Packaging size	20
Net weight	8.99 g
Country of origin	Romania
European customs tariff number	85366990
GTIN	5713140427723
eCl@ss	27460201 PCB connector (board connector)



#### Mating conditions

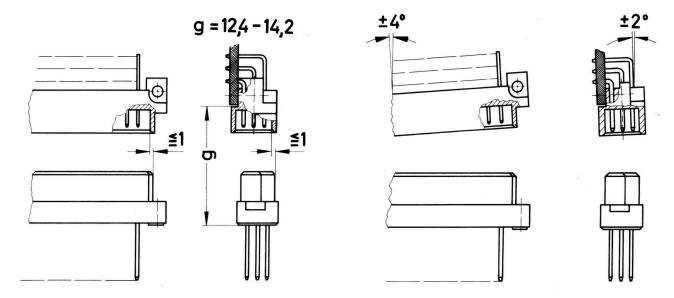

To ensure reliable connections and prevent unnecessary damage, please refer to the application data diagrams. These recommendations are set out in IEC 60603-2.

The connectors should not be coupled and decoupled under electrical load.