
PXle-6366 and USB-6366 Specifications

2025-08-22



Contents

PXIe-6366 and USB-6366 Specifications	3
---	---

PXIe-6366 and USB-6366 Specifications

PXIe-6366 and USB-6366 Specifications

The following specifications are typical at 25 °C, unless otherwise noted. For more information about the PXIe-6366 and USB-6366, refer to the ***X Series User Manual*** available from ni.com/manuals.

Device Pinouts

Figure 1. NI PXIe-6366 Pinout

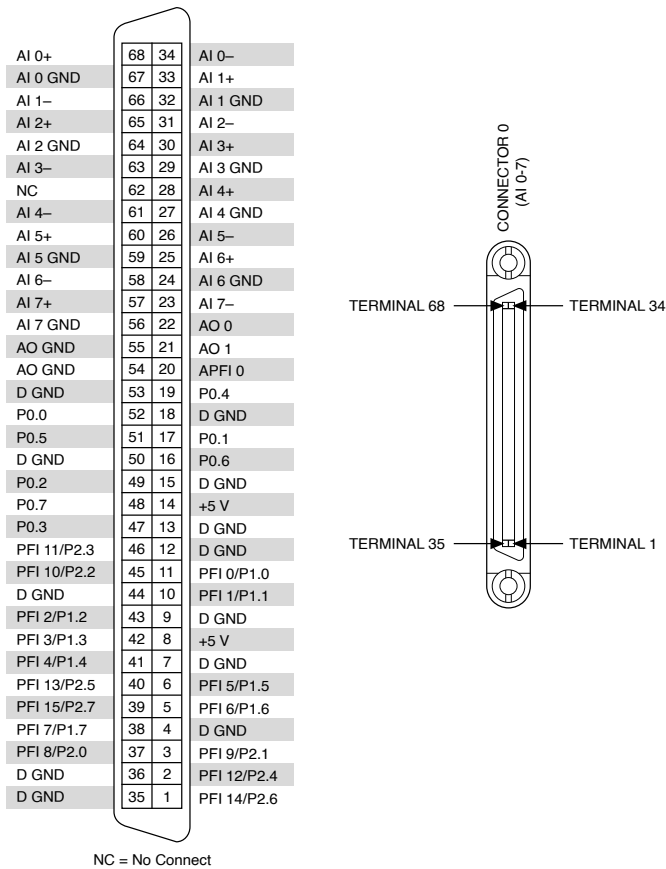


Figure 2. NI USB-6366 Mass Termination Pinout

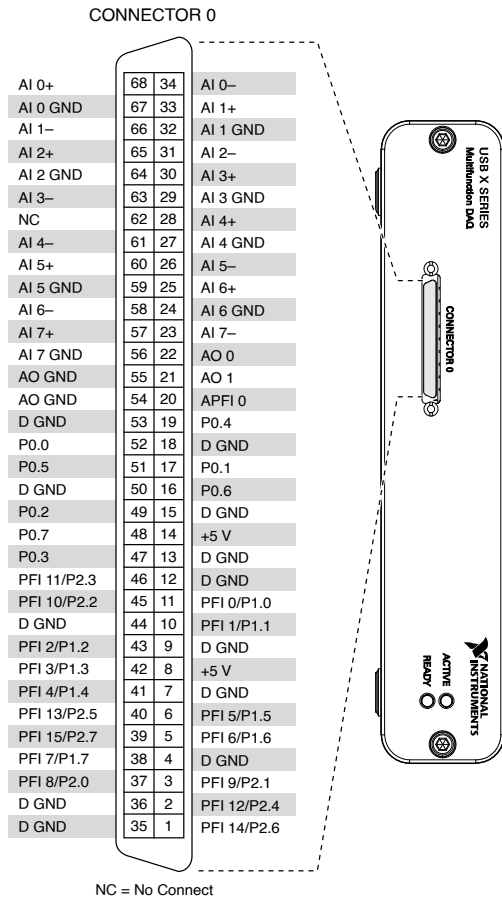


Figure 3. NI USB-6366 Screw Terminal Pinout


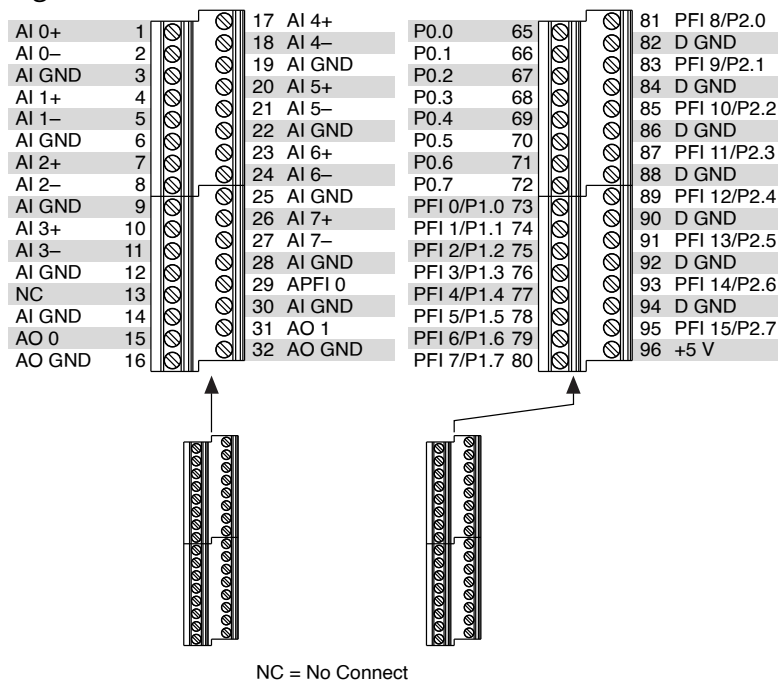


Figure 4. NI USB-6366 BNC Front Panel and Pinout

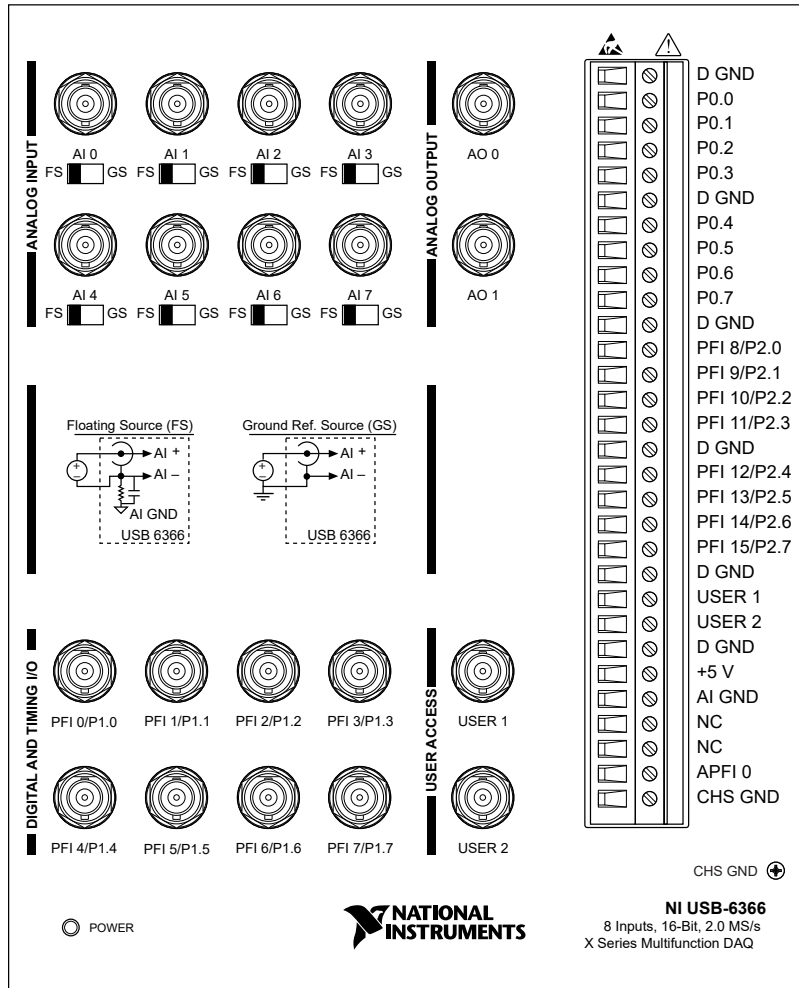

Analog Input

Number of channels	8 differential
ADC resolution	16 bits
DNL	No missing codes guaranteed
INL	Refer to the AI Absolute Accuracy section.
Sample rate	

Single channel maximum	2.00 MS/s
Minimum	No minimum

Timing resolution	10 ns
Timing accuracy	50 ppm of sample rate
Input coupling	DC
Input range	± 1 V, ± 2 V, ± 5 V, ± 10 V

Maximum working voltage for all analog inputs	
Positive input (AI+)	± 11 V for all ranges, Measurement Category I
Negative input (AI-)	± 11 V for all ranges, Measurement Category I



Caution Do not use for measurements within Categories II, III, and IV.

CMRR (at 60 Hz)	75 dB
Bandwidth	1 MHz

THD		-80 dBFS
Input impedance		
Device on		
AI+ to AI GND	>100 GΩ in parallel with 100 pF	
AI- to AI GND	>100 GΩ in parallel with 100 pF	
Device off		
AI+ to AI GND	2 kΩ	
AI- to AI GND	2 kΩ	

Input bias current		± 10 pA
Crosstalk (at 100 kHz)		
Adjacent channels		-80 dB
Non-adjacent channels		-100 dB
Input FIFO size		
PXIe	8,182 samples shared among channels used	
USB (32 MS)	32 MS shared among channels used	

USB (64 MS)	64 MS shared among channels used
Data transfers	
PXIe	DMA (scatter-gather), programmed I/O
USB	USB Signal Stream, programmed I/O
Overvoltage protection for all analog input channels	
Device on	$\pm 36\text{ V}$
Device off	$\pm 15\text{ V}$
Input current during overvoltage conditions	
Input current during overvoltage conditions	$\pm 20\text{ mA max/AI pin}$

Analog Triggers

Number of triggers	1
Source	AI <0..7>, APFI 0
Functions	Start Trigger, Reference Trigger, Pause Trigger, Sample Clock, Sample Clock Timebase
Source level	

AI <0..7>	±Full scale
APFI 0	±10 V

Resolution	16 bits
Modes	Analog edge triggering, analog edge triggering with hysteresis, and analog window triggering
Bandwidth (-3 dB)	
AI <0..7>	3.4 MHz
APFI 0	3.9 MHz

Accuracy	±1% of range
----------	--------------

APFI 0 characteristics	
Input impedance	10 kΩ
Coupling	DC
Protection, power on	±30 V

Protection, power off	± 15 V
-----------------------	------------

AI Absolute Accuracy

Table 2. AI Absolute Accuracy

Nominal Range Positive Full Scale	Nominal Range Negative Full Scale	Residual Gain Error (ppm of Reading)	Offset Tempco (ppm of Range/ $^{\circ}$ C)	Random Noise, σ (μ Vrms)	Absolute Accuracy at Full Scale (μ V)
10	-10	114	35	252	2,688
5	-5	120	36	134	1,379
2	-2	120	42	71	564
1	-1	138	50	61	313



Note For more information about absolute accuracy at full scale, refer to the [AI Absolute Accuracy Example](#) section.

Gain tempco	8 ppm/ $^{\circ}$ C
Reference tempco	5 ppm/ $^{\circ}$ C
Residual offset error	15 ppm of range
INL error	46 ppm of range



Note Accuracies listed are valid for up to two years from the device external calibration.

AI Absolute Accuracy Equation

$$\text{AbsoluteAccuracy} = \text{Reading} \cdot (\text{GainError}) + \text{Range} \cdot (\text{OffsetError}) + \text{NoiseUncertainty}$$

- $\text{GainError} = \text{ResidualGainError} + \text{GainTempco} \cdot (\text{TempChangeFromLastInternalCal}) + \text{ReferenceTempco} \cdot (\text{TempChangeFromLastExternalCal})$
- $\text{OffsetError} = \text{ResidualOffsetError} + \text{OffsetTempco} \cdot (\text{TempChangeFromLastInternalCal}) + \text{INLError}$
- $\text{NoiseUncertainty} = \frac{\text{Random Noise} \cdot 3}{\sqrt{10,000}}$
for a coverage factor of 3 σ and averaging 10,000 points.

AI Absolute Accuracy Example

Absolute accuracy at full scale on the analog input channels is determined using the following assumptions:

- $\text{TempChangeFromLastExternalCal} = 10^\circ\text{C}$
- $\text{TempChangeFromLastInternalCal} = 1^\circ\text{C}$
- $\text{number_of_readings} = 10,000$
- $\text{CoverageFactor} = 3\sigma$

For example, on the 10 V range, the absolute accuracy at full scale is as follows:

- $\text{GainError} = 114 \text{ ppm} + 8 \text{ ppm} \cdot 1 + 5 \text{ ppm} \cdot 10 = 172 \text{ ppm}$
- $\text{OffsetError} = 15 \text{ ppm} + 35 \text{ ppm} \cdot 1 + 46 \text{ ppm} = 96 \text{ ppm}$
- $\text{Noise Uncertainty} = \frac{252 \mu\text{V} \cdot 3}{\sqrt{10,000}} = 7.6 \mu\text{V}$
- $\text{AbsoluteAccuracy} = 10 \text{ V} \cdot (\text{GainError}) + 10 \text{ V} \cdot (\text{OffsetError}) + \text{NoiseUncertainty} = 2688 \mu\text{V}$

Analog Output

Number of channels	2
DAC resolution	16 bits
DNL	± 1 LSB, max
Monotonicity	16 bit guaranteed
Accuracy	Refer to the AO Absolute Accuracy section.
Maximum update rate (simultaneous)	
1 channel	3.3 MS/s
2 channels	3.3 MS/s
Minimum update rate	No minimum
Timing accuracy	50 ppm of sample rate
Timing resolution	10 ns
Output range	± 10 V, ± 5 V, $\pm$ external reference on APFI 0

Output coupling	DC
Output impedance	0.4 Ω
Output current drive	± 5 mA
Overdrive protection	± 25 V
Overdrive current	10 mA
Power-on state	± 5 mV
Power on/off glitch	
PXIe	1.5 V peak for 200 ms
USB	1.5 V peak for 200 ms, typical behavior ¹

Output FIFO size	8,191 samples shared among channels used
Data transfers	
PXIe	DMA (scatter-gather), programmed I/O
USB	USB Signal Stream, programmed I/O

1. Time period may be longer due to host system USB performance. Time period will be longer during firmware updates.

AO waveform modes	Non-periodic waveform, periodic waveform regeneration mode from onboard FIFO, periodic waveform regeneration from host buffer including dynamic update
Settling time, full-scale step, 15 ppm (1 LSB)	2 μ s
Slew rate	20 V/ μ s
Glitch energy at midscale transition, ± 10 V range	6 nV $\cdot$ s


External Reference

APFI 0 characteristics	
Input impedance	10 k Ω
Coupling	DC
Protection, device on	± 30 V
Protection, device off	± 15 V
Range	± 11 V

Slew rate

 $\pm 20 \text{ V}/\mu\text{s}$

Figure 5. Analog Output External Reference Bandwidth

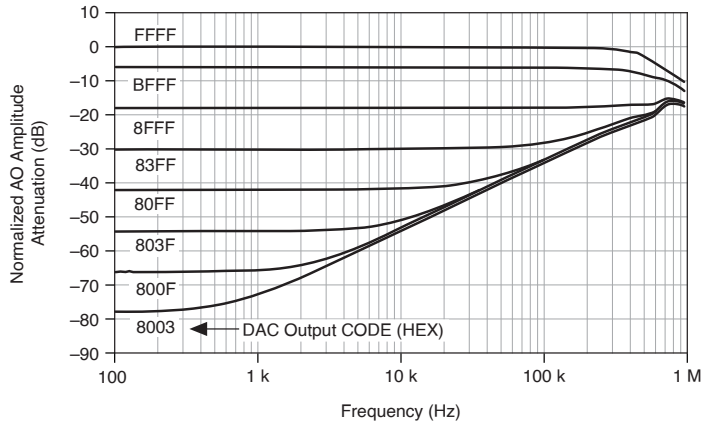

AO Absolute Accuracy

Absolute accuracy at full-scale numbers is valid immediately following self calibration and assumes the device is operating within 10 °C of the last external calibration.

Table 3. AO Absolute Accuracy

Nominal Range Positive Full Scale	Nominal Range Negative Full Scale	Residual Gain Error (ppm of Reading)	Gain Tempco (ppm/°C)	Reference Tempco (ppm/°C)	Residual Offset Error (ppm of Range)	Offset Tempco (ppm of Range/°C)	INL Error (ppm of Range)	Absolute Accuracy at Full Scale (μV)
10	-10	129	17	5	65	1	64	3,256
5	-5	135	8	5	65	1	64	1,616



Note Accuracies listed are valid for up to two years from the device external calibration.

AO Absolute Accuracy Equation

$$\text{AbsoluteAccuracy} = \text{OutputValue} \cdot (\text{GainError}) + \text{Range} \cdot (\text{OffsetError})$$

- ***GainError*** = ***ResidualGainError*** + ***GainTempco*** ·
(***TempChangeFromLastInternalCal***) + ***ReferenceTempco*** ·
(***TempChangeFromLastExternalCal***)
- ***OffsetError*** = ***ResidualOffsetError*** + ***OffsetTempco*** ·
(***TempChangeFromLastInternalCal***) + ***INLError***

Digital I/O/PFI

Static Characteristics

Number of channels	24 total, 8 (P0.<0..7>), 16 (PFI <0..7>/P1, PFI <8..15>/P2)
Ground reference	D GND
Direction control	Each terminal individually programmable as input or output
Pull-down resistor	50 kΩ typical, 20 kΩ minimum
Input voltage protection	±20 V on up to two pins



Caution Stresses beyond those listed under the ***Input voltage protection*** specification may cause permanent damage to the device.

Waveform Characteristics (Port 0 Only)

Terminals used	Port 0 (P0.<0..7>)
Port/sample size	Up to 8 bits

Waveform generation (DO) FIFO		2,047 samples
Waveform acquisition (DI) FIFO		255 samples
DI Sample Clock frequency		
PXIe	0 to 10 MHz, system and bus activity dependent	
USB	0 to 1 MHz, system and bus activity dependent	
DO Sample Clock frequency		
PXIe		
Regenerate from FIFO	0 to 10 MHz	
Streaming from memory	0 to 10 MHz, system and bus activity dependent	
USB		
Regenerate from FIFO	0 to 10 MHz	
Streaming from memory	0 to 1 MHz, system and bus activity dependent	
Data transfers		
PXIe	DMA (scatter-gather), programmed I/O	
USB	USB Signal Stream, programmed I/O	

Digital line filter settings	160 ns, 10.24 μ s, 5.12 ms, disable
------------------------------	---

PFI/Port 1/Port 2 Functionality

Functionality	Static digital input, static digital output, timing input, timing output
Timing output sources	Many AI, AO, counter, DI, DO timing signals
Debounce filter settings	90 ns, 5.12 μ s, 2.56 ms, custom interval, disable; programmable high and low transitions; selectable per input

Recommended Operating Conditions

Input high voltage (V_{IH})	
Minimum	2.2 V
Maximum	5.25 V
Input low voltage (V_{IL})	
Minimum	0 V
Maximum	0.8 V
Output high current (I_{OH})	
P0.<0..7>	-24 mA maximum

PFI <0..15>/P1/P2	-16 mA maximum
Output low current (I_{OL})	
P0.<0..7>	24 mA maximum
PFI <0..15>/P1/P2	16 mA maximum

Digital I/O Characteristics

Positive-going threshold (V_{T+})	2.2 V maximum
Negative-going threshold (V_{T-})	0.8 V minimum
Delta VT hysteresis ($V_{T+} - V_{T-}$)	0.2 V minimum
I_{IL} input low current ($V_{IN} = 0$ V)	-10 μ A maximum
I_{IH} input high current ($V_{IN} = 5$ V)	250 μ A maximum

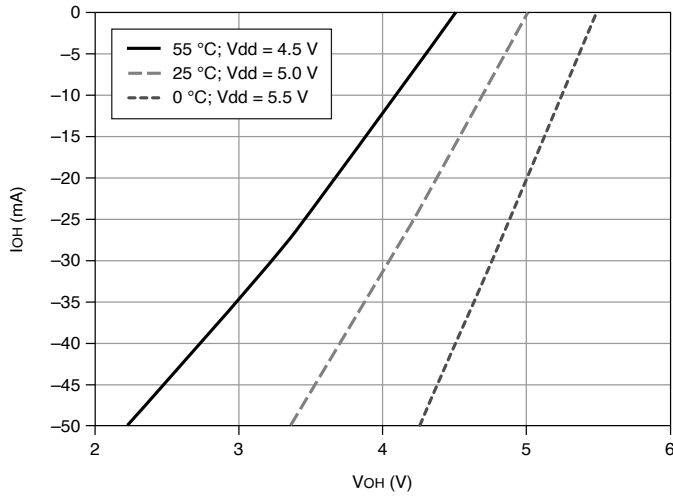
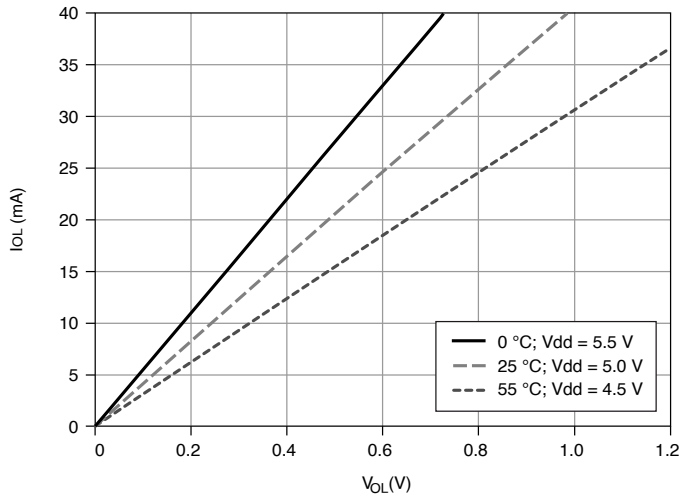
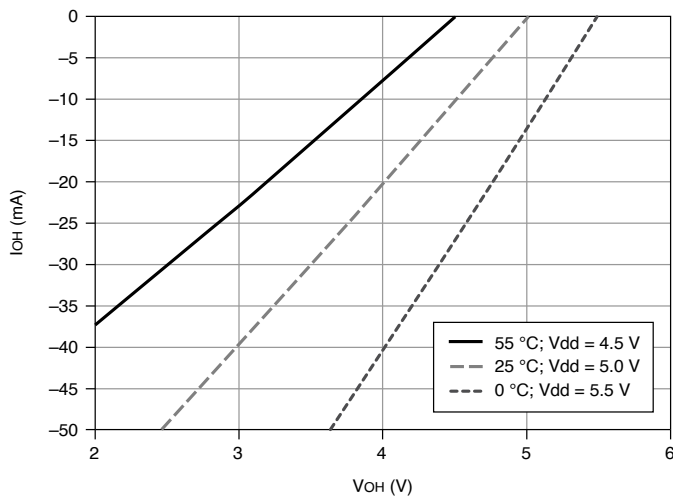
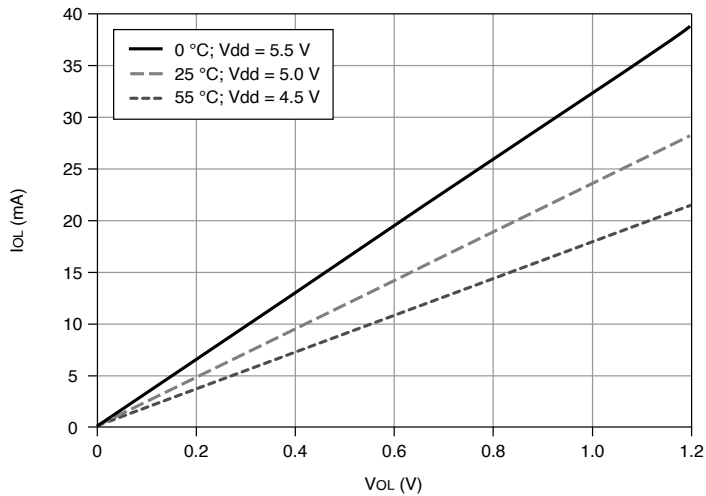
Figure 6. P0.<0..7>: I_{OH} versus V_{OH} Figure 7. P0.<0..7>: I_{OL} versus V_{OL} Figure 8. PFI <0..15>/P1/P2: I_{OH} versus V_{OH} 

Figure 9. PFI <0..15>/P1/P2: I_{OL} versus V_{OL} 

General-Purpose Counters

Number of counter/timers	4
Resolution	32 bits
Counter measurements	Edge counting, pulse, pulse width, semi-period, period, two-edge separation
Position measurements	X1, X2, X4 quadrature encoding with Channel Z reloading; two-pulse encoding
Output applications	Pulse, pulse train with dynamic updates, frequency division, equivalent time sampling
Internal base clocks	100 MHz, 20 MHz, 100 kHz
External base clock frequency	

PXIe	0 MHz to 25 MHz; 0 MHz to 100 MHz on PXIe_DSTAR<A,B>
USB	0 MHz to 25 MHz

Base clock accuracy	50 ppm
Inputs	Gate, Source, HW_Arm, Aux, A, B, Z, Up_Down, Sample Clock

Routing options for inputs

PXIe	Any PFI, PXIe_DSTAR<A,B>, PXI_TRIG, PXI_STAR, analog trigger, many internal signals
USB	Any PFI, analog trigger, many internal signals

FIFO	127 samples per counter
------	-------------------------

Data transfers

PXIe	Dedicated scatter-gather DMA controller for each counter/timer, programmed I/O
USB	USB Signal Stream, programmed I/O

Frequency Generator

Number of channels	1
Base clocks	20 MHz, 10 MHz, 100 kHz
Divisors	1 to 16
Base clock accuracy	50 ppm

Output can be available on any PFI terminal.

Phase-Locked Loop (PLL)

Number of PLLs	1
----------------	---

Table 4. Reference Clock Locking Frequencies

Reference Signal	PXI Express Locking Input Frequency (MHz)	USB Locking Input Frequency (MHz)
PXIe_DSTAR<A,B>	10, 20, 100	—
PXI_STAR	10, 20	—
PXIe_CLK100	100	—
PXI_TRIG <0..7>	10, 20	—
PFI <0..15>	10, 20	10

Output of PLL	100 MHz Timebase; other signals derived from 100 MHz Timebase including 20 MHz and 100 kHz Timebases
---------------	--

External Digital Triggers

Source	
PXIe	Any PFI, PXIe_DSTAR<A,B>, PXI_TRIG, PXI_STAR
USB	Any PFI

Polarity	Software-selectable for most signals
Analog input function	Start Trigger, Reference Trigger, Pause Trigger, Sample Clock, Sample Clock Timebase
Analog output function	Start Trigger, Pause Trigger, Sample Clock, Sample Clock Timebase
Counter/timer functions	Gate, Source, HW_Arm, Aux, A, B, Z, Up_Down, Sample Clock
Digital waveform generation (DO) function	Start Trigger, Pause Trigger, Sample Clock, Sample Clock Timebase
Digital waveform acquisition (DI) function	Start Trigger, Reference Trigger, Pause Trigger, Sample Clock, Sample Clock Timebase

Device-to-Device Trigger Bus

Input source

PXIe	PXI_TRIG <0..7>, PXI_STAR, PXIe_DSTAR<A,B>
USB	None
Output destination	
PXIe	PXI_TRIG <0..7>, PXIe_DSTARC
USB	None

Output selections	10 MHz Clock, frequency generator output, many internal signals
Debounce filter settings	90 ns, 5.12 μ s, 2.56 ms, custom interval, disable; programmable high and low transitions; selectable per input

Bus Interface

PXIe	
Form factor	x1 PXI Express peripheral module, specification rev 1.0 compliant
Slot compatibility	x1 and x4 PXI Express or PXI Express hybrid slots
DMA channels	8, can be used for analog input, analog output, digital input, digital output, counter/timer 0, counter/timer 1, counter/timer 2, counter/timer 3

All PXIe devices may be installed in PXI Express slots or PXI Express hybrid slots.

USB	
USB compatibility	USB 2.0 Hi-Speed or full-speed ²
USB Signal Stream	8, can be used for analog input, analog output, digital input, digital output, counter/timer 0, counter/timer 1, counter/timer 2, counter/timer 3

Power Requirements



Caution The protection provided by the device can be impaired if the device is used in a manner not described in the ***X Series User Manual***.

PXIe	
+3.3 V	4.75 W
+12 V	15.6 W
USB	
Power supply requirements	11 to 30 VDC, 30 W, 2 positions 3.5 mm pitch pluggable screw terminal with screw locks similar to Phoenix Contact MC 1,5/2-STF-3,5 BK
Power input mating connector	Phoenix Contact MC 1,5/2-GF-3,5 BK or equivalent

- Operating on a full-speed bus results in lower performance and you might not be able to achieve maximum sampling/update rates.



Caution The USB device must be powered with an NI offered AC adapter or a National Electric Code (NEC) Class 2 DC source that meets the power requirements for the device and has the appropriate safety certification marks for country of use.

Current Limits



Note Exceeding the current limits may cause unpredictable device behavior.

PXIe, +5 V terminal (connector 0)	1 A max ^{3[3]}
USB, +5 V terminal	1 A max ^[3]

Physical Characteristics

PXIe printed circuit board dimensions	Standard 3U PXI
USB enclosure dimensions (includes connectors)	
Mass termination	18.5 × 17.3 × 3.6 cm (7.3 × 6.8 × 1.4 in.)
Screw terminal	26.4 × 17.3 × 3.6 cm (10.4 × 6.8 × 1.4 in.)
BNC	20.3 × 18.5 × 6.8 cm (8.0 × 7.3 × 2.7 in.)
Weight	
PXI	168 g (5.9 oz)

- Has a self-resetting fuse that opens when current exceeds this specification.

USB Mass Termination		967 g (2 lb 2.1 oz)
USB Screw Terminal		1.428 kg (3 lb 2.3 oz)
USB BNC		1.536 kg (3 lb 6.2 oz)
I/O connector		
PXIe	1 68-pin VHDCI	
USB Mass Termination	1 68-pin VHDCI	
USB Screw Terminal	64 screw terminals	
USB BNC	20 BNCs and 30 screw terminals	

Table 5. PXIe and USB Mass Termination Mating Connectors

Manufacturer, Part Number	Description
MOLEX 71430-0011	68-Pos Right Angle Single Stack PCB-Mount VHDCI (Receptacle)
MOLEX 74337-0016	68-Pos Right Angle Dual Stack PCB-Mount VHDCI (Receptacle)
MOLEX 71425-3001	68-Pos Offset IDC Cable Connector (Plug) (SHC68-*)

USB screw terminal/BNC screw terminal wiring	16-24 AWG
--	-----------

Calibration

Recommended warm-up time	15 minutes
Calibration interval	2 years

Maximum Working Voltage

Maximum working voltage refers to the signal voltage plus the common-mode voltage.

Channel to earth	11 V, Measurement Category I
------------------	------------------------------



Caution Do not use for measurements within Categories II, III, or IV.

Shock and Vibration

Operational shock	30 g peak, half-sine, 11 ms pulse (Tested in accordance with IEC 60068-2-27. Test profile developed in accordance with MIL-PRF-28800F.)
Random vibration	
Operating	5 to 500 Hz, 0.3 grms
Nonoperating	5 to 500 Hz, 2.4 grms (Tested in accordance with IEC 60068-2-64. Nonoperating test profile exceeds the

	requirements of MIL-PRF-28800F, Class 3.)
--	---

Environmental

Operating temperature	
PXIe	0 to 55 °C
USB	0 to 45 °C

Storage temperature	-40 to 70 °C
Operating humidity	10 to 90% RH, noncondensing
Storage humidity	5 to 95% RH, noncondensing
Pollution Degree	2
Maximum altitude	2,000 m

Indoor use only.

Safety Compliance Standards

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1

- UL 61010-1, CSA C22.2 No. 61010-1



Note For safety certifications, refer to the product label or the [Product Certifications and Declarations](#) section.

EMC Standards

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- AS/NZS CISPR 11: Group 1, Class A emissions
- ICES-001: Class A emissions



Note Group 1 equipment is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.



Note In Europe, Australia, New Zealand, and Canada (per CISPR 11) Class A equipment is intended for use in non-residential locations.

CE Compliance

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)

Product Certifications and Declarations

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for NI products, visit ni.com/product-certifications, search by model number, and click the appropriate

link.

Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the ***Engineering a Healthy Planet*** web page at ni.com/environment. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

EU and UK Customers

-  **Waste Electrical and Electronic Equipment (WEEE)**—At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit ni.com/environment/weee.

电子信息产品污染控制管理办法（中国RoHS）

-  **中国RoHS**—NI符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于NI中国RoHS合规性信息，请登录 ni.com/environment/rohs_china。(For information about China RoHS compliance, go to ni.com/environment/rohs_china.)