

Universal Battery Charger

POWER SOLVE


www.powersolve.co.uk

PSCH30

NiMH/NiCd Smart Charger

Features

- Universal 90-264VAC Input
- IEC320 C8 2 pin AC Input Connector
- Auto detect output can charge 8 to 15 NiMH or NiCd cells in series
- Switch Selectable Charge Current
- Automatic cut off when batteries fully charged
- Over Temperature Protection
- EMC to EN55022 'B', CISPR22 'B' & FCC 'B'
- Compact Desk Top Plastic Enclosure
- Optional DC Output Connectors

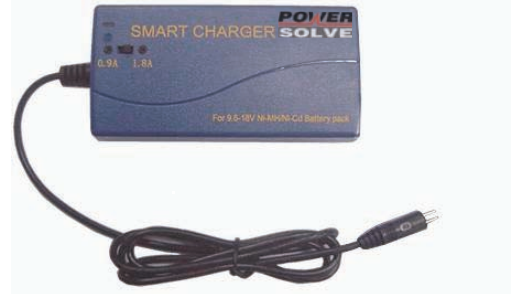

Electrical Specification

INPUT

Input Voltage	90-264VAC 2A max
Input Frequency	47-63Hz
Safety Ground Leakage Current	<0.5mA

OUTPUT

Output Voltage	Varies to charge 9.6V to 18V DC battery pack
Charging Current	500mA to 1.8A (output can be switched to charge at 0.9A or 1.8A)
LED Charge Status Indicator	LED flashes Red then Green twice after power on then switches off in standby LED is Red when charging and turns Green when battery fully charged. LED will flash on and off RED for error status
Over Voltage Protection	Sense level 24V, OVP at 27V max
Short Circuit Protection	Short circuit with auto recovery
Reverse Polarity Protection	Reverse polarity of battery on output will not damage charger
Over Temperature Protection	When battery temperature is above 55°C the charger will immediately turn to trickle-off charge and green LED will turn on
Efficiency	75% minimum at full load and 115VAC input

ENVIRONMENTAL

Operating Temperature	0 to 40°C, ambient
Storage Temperature	-40°C to +70°C
Relative Humidity	20-85% max operating


SAFETY & EMC

Safety	UL/cUL1310 Class 2, EN60335-2-29:2004, EN60335-1, CE
EMI/EMC	CISPR22 'B', FCC Part 15 'B', EN55022 'B'

MECHANICAL

UL94V-1 plastic enclosure, dimensions 120 x 60 x 38mm, output cable 1.2 metre

Charge Curve

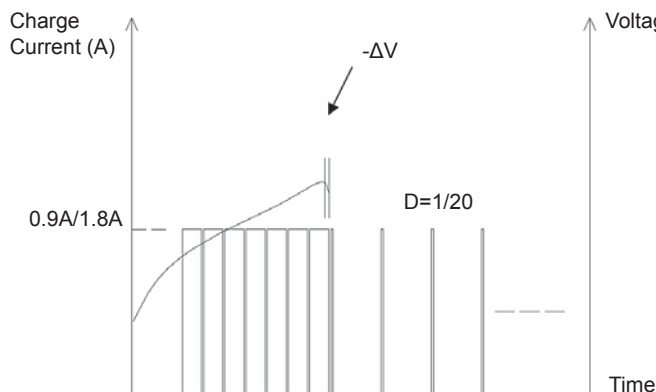

This charger can charge between 8 and 15 NiMH or NiCd cells connected in series and will detect and provide the correct output voltage and current to suit. End charge is by $-\Delta V$ (about 5mV for each cell) detection, after $-\Delta V$. It will turn to trickle-off charge, its charger current is fast charging current of 1/20.