



# 8TA Connector




## How to order

Basic series		8TA	0	08	35	P	N
Shell style	0: Oval flange receptacle (for front or rear mounting) 1: In-line receptacle 6: Plug 7: Jam nut receptacle						
Shell size	08						
Layout	35 (6 contacts size 22D)						
Type of contact	P: Pin contacts S: Socket contacts						
Orientation	N: Red / A: Yellow / D: Green						

## Protective cap

Basic series		8TA	8	08
Shell style	8: Plug protective cap 9: Receptacle protective cap			
Shell size	08			

## Range presentation

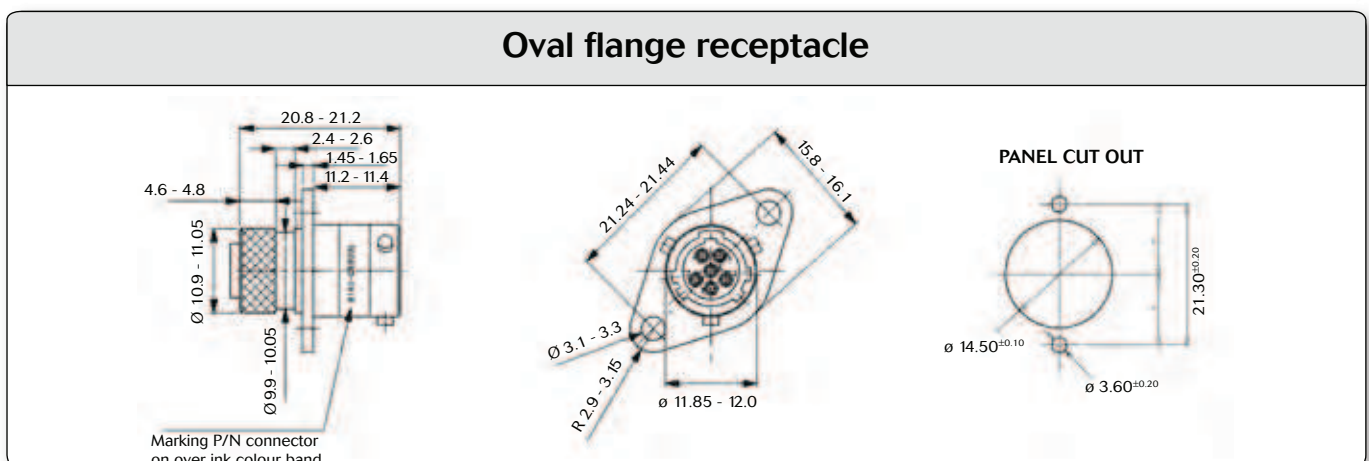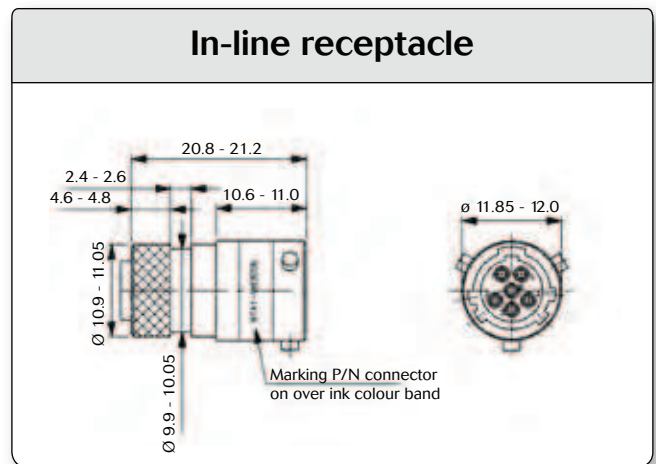
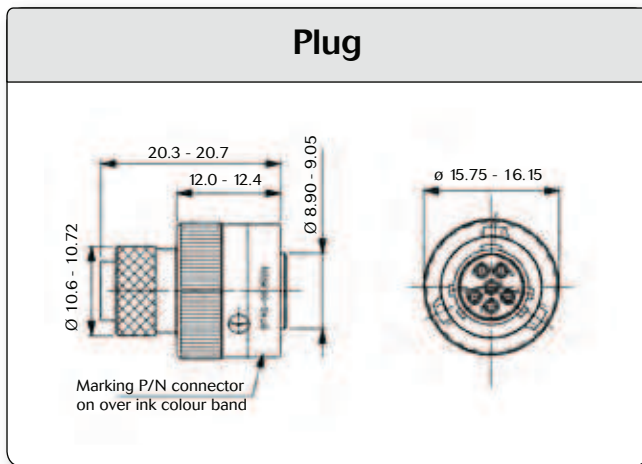


Note : all dimensions are in mm



# 8TA Connector


## Jam nut receptacle

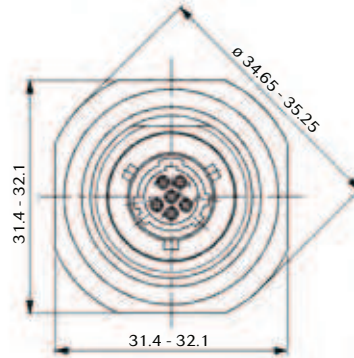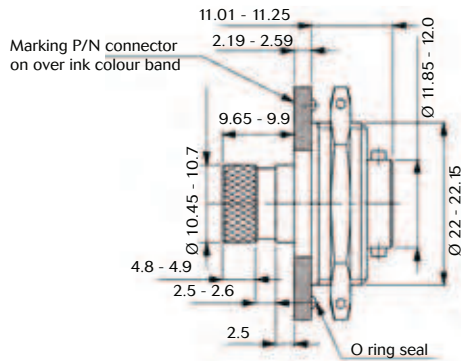

### PANEL CUT OUT





## Grounded receptacle

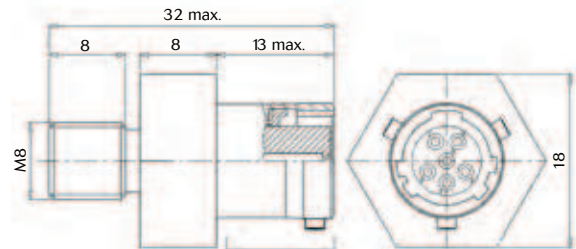

Connecting interface compliant with 8TA0

Please consult us for more information

## Orientation

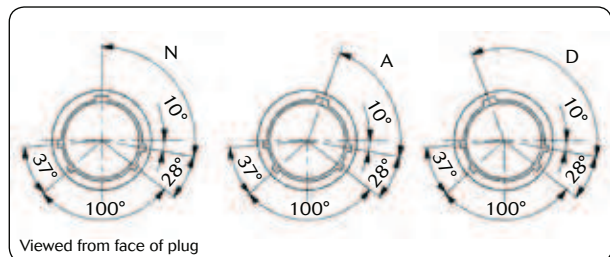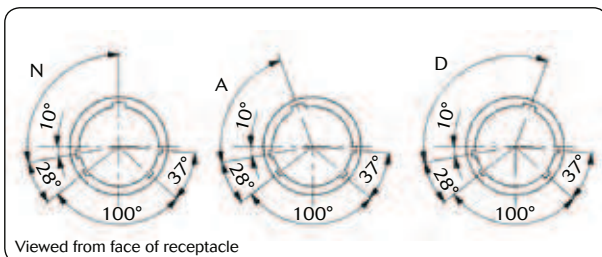

Key positions	Alpha 1	Colour band
N	100°	Red
A	82°	Yellow
D	118°	Green