


## 8714 CV Max. 650 mA

### CHARGERS FOR LEAD ACID BATTERIES

- Konstantspenningslader for blybatterier
  - Maks. ladestrøm 650 mA
  - Egnet for lading av mindre forseglede blybatterier, f.eks. 2,5-6 Ah
  - Lineær
  - Termosikring i transformator, termisk beskyttelse i regulator, polvendings- og kortslutningssikker
  - Plugg-inn enhet
  - Lysdiode indikerer lading
  - Kan leveres med medisinsk godkjenning (EN 60601) på forespørsel
  - Utskiftbare DC plugger
- *Constant voltage charger for lead acid batteries*
  - *Max. charge current 650 mA*
  - *Suitable for charging of small, sealed lead acid batteries, e.g. 2,5-6 Ah*
  - *Linear*
  - *Thermal fuse in transformer, thermal protection in regulator, protected against reversed polarity and short circuit proof*
  - *Plug-in unit*
  - *LED indicates charging*
  - *Available with medical approved (EN 60601) upon request*
  - *Exchangeable DC plugs*

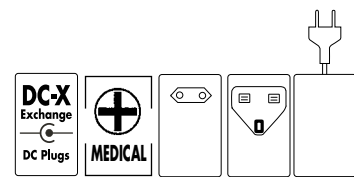

#### Tekniske data

Inngangsspenning:  
Ladespenning:  
Ladestrøm:  
Strømtrekk fra batteri ved frakoblet nett:  
Temperaturområde:  
Strømbegrensning:  
Isolasjonsklasse:  
Elektrisk sikkerhetsstandard:  
EMC standarder

- Emisjon:
- Immunitet:

Utgangsterminaler

- Sek. ledning med/uten plugg:

Mål uten plugg (LxBxH):  
Vekt:

#### Technical specifications

*Input voltage:* 230 VAC +6/-10%, 50/60Hz  
*Charging voltage:* 14,9 VDC \*  
*Charge current:* Max. 650 mA  
*Leakage current from battery when mains switched off:* < 0,1 mA  
*Temperature range:* -10°C - +40°C  
*Current limiting:* 650 mA  
*Insulation class:* II  
*Electrical safety standard:* EN 60065, EN 60950  
*EMC standards*

- *Emission:* EN 61000-6-3
- *Immunity:* EN 61000-6-1

*Output terminals*

- *Cord with/without plug:* Tilbehør / Accessories


*Dimensions without plug (LxWxH):* 100 x 51 x 63 mm  
*Weight:* 450 g

\* Enheten er innvendig justerbar og ved vedlikeholdslading bør spenningen justeres ned til 13,6-13,9 V. Det er vanligvis anbefalt å lade 12 V blybatterier med 14,6-15 V ved daglig bruk. Skulle det være usikkerhet m.h.t. et bestemt batteri, anbefaler vi at man kontakter batteriproducent eller leverandør. Kan på bestilling leveres med andre utgangsspenninger.

\* *The unit is internally adjustable and at float charge the voltage should be adjusted to 13,6-13,9 V. In cycle use it's normally recommended to charge 12 V batteries with 14,6-15 V. If there should be any doubt about the charging condition for a particular battery, contact the battery manufacturer or supplier for more information.*

*Can on request be delivered with other output voltages.*

#### Ladekaraktistikk Charging characteristics

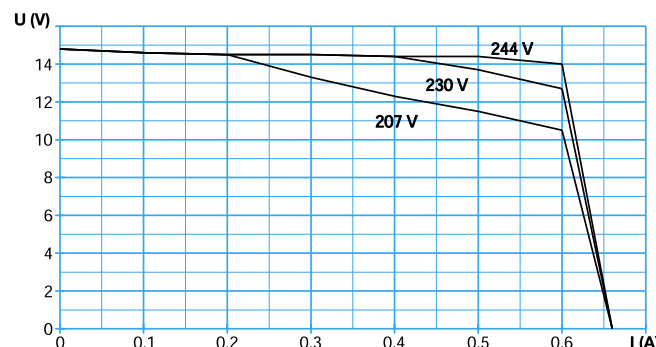

23052006

www.mascot.no  
sales@mascot.no  
Phone:  
Fax:

**Main Office**  
PO Box 177  
N-1601 FREDRIKSTAD  
NORWAY  
+47 69 36 43 00  
+47 69 36 43 01

**Mascot UK**  
Box 2090, Salisbury  
Wiltshire SP2 2BH  
UK  
+44 1722 504 853  
+44 845 299 1210

**Mascot DE-AT-CH-BENELUX**  
Hirschbergstr. 28/7  
D-74838 LIMBACH  
GERMANY  
+49 6287 95140  
+49 6287 95141

Tettninger Str. 52  
D-88239 WANGEN  
GERMANY  
+49 7528 95 16 77  
+49 7528 95 16 78

**Mascot France**  
38 rue Leo Lagrange  
94270 Le Kremlin Bicêtre  
FRANCE  
+33 1 46 58 71 85  
+33 1 46 58 71 85