



# AMPROBE®

ACD-30P & ACD-31P


1000A Clamp-on Power Meters



*These instruments combine the standard features of professional clamp-on meters, with full Power analyzing capabilities! Measure: Active (W), Reactive (VAR) and Apparent (VA) Powers along with dual display Power Factor readout. Increase measuring efficiency with an optional PC interface kit.*

- TRMS sensing
- Back light display (ACD-31P)
- AutoVA - Auto Selection of AC Volts, DC Volts or AC Amps
- Measurements:
  - AC/DC Voltage up to 600V, AC Current up to 1000A, Resistance, Frequency
  - Active (W), Reactive (VAR) & Apparent (VA) Power with dual-display Power Factor readout
  - Temperature (ACD-31P)
- Optional PC interface capability
- Audible continuity
- Auto power off
- Automatic polarity
- Low battery indication
- Peak hold
- Data hold
- Large, easy to read LCD display
- Accommodates conductors up to 1.77" (45mm) in diameter
- Carrying case, test leads, batteries (installed), thermocouple (ACD-31P), and manual included
- Voltage overload protection for all functions up to 600V AC/DC
- Safety CAT III 600V

FEATURES	ACD-30P	ACD-31P	BASIC ACCURACY
TRMS Measurement	Yes		
AC Current	40.0 / 400.0 / 1000 A		+/- (1.0% Rdg + 5 LSD) @ 50 and 60Hz
DC Voltage	600.0V		+/- (0.5% Rdg + 5 LSD)
AC Voltage	600.0V		+/- (0.5% Rdg + 5 LSD) @ 50 / 60 Hz
Resistance	999.9 Ohms		+/- (1.0% Rdg + 6 LSD)
Frequency	5.00Hz to 500.0Hz		+/- (0.5% Rdg + 4 LSD)
Active Power (W)	0 to 600.0 kW		+/- (2.0% Rdg + 6 LSD) @ Harmonics Fund to 10th & PF > 0.7
Reactive Power (VAR)	0 to 600.0 kVAR		+/- (2.0% Rdg + 6 LSD) @ Harmonics Fund to 10th & PF > 0.7
Apparent Power (VA)	0 to 600.0 kVA		+/- (2.0% Rdg + 6 LSD) @ Harmonics Fund to 10th
Power Factor	0.10 to 0.99		+/- 3 LSD @ Harmonics Fund to 21th
Temperature		-58 F to 572 F (-50 C to 300 C)	+/- (2.0% Rdg + 6F) +/- (2.0 % Rdg + 3C)

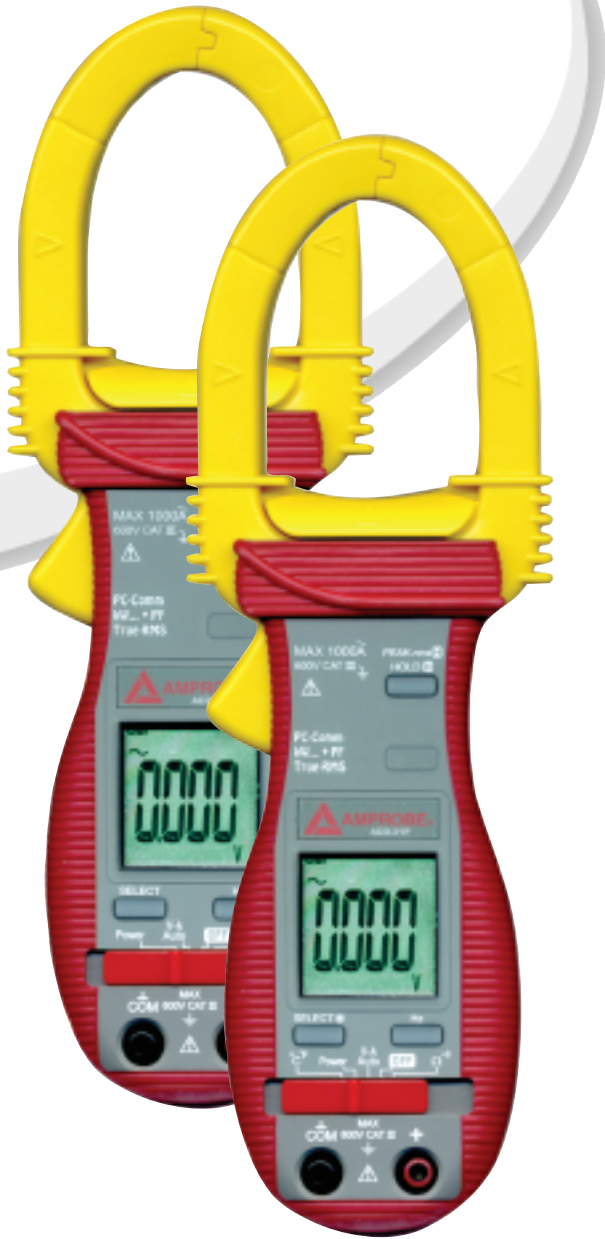

*These instruments combine the standard features of professional clamp-on meters, with full Power analyzing capabilities! Measure: Active (W), Reactive (VAR) and Apparent (VA) Powers along with dual display Power Factor readout. Increase measuring efficiency with an optional PC interface kit.*

OPTIONAL ACCESSORIES	PART NUMBER
PC Interface kit (PC connection cable with software)	RS-232 KIT2
Line splitter (Energizer)	A47L
5000A Clamp-on Current Transformer (50 to 1)	CT50-1
3000A Clamp-on Current Transformer (50 to 1)	CT50-2
Dual input Thermocouple adapter with two thermocouples -50°F to 600°F	DKTA-620 and two of TPK-56
Alligator Clips (For test leads)	VRC-320

REPLACEMENT PARTS	PART NUMBER
<i>(supplied with product)</i>	
Test leads with set of alligator clips (alligator clips are not supplied with product)	MTL-90B
Thermocouple	TPK-59
Carrying case	SV-U
Instruction Manual	<a href="http://www.AMPROBE.com">www.AMPROBE.com</a>

**Update Rate:**

**Power function:** 1 per second nominal Voltage, ACA clamp-on, Ohm, Hz & Temperature functions: 4 per second nominal  
**Polarity:** Automatic  
**Low Battery:** Below approx. 2.4V  
**Operating Temperature:** 0°C to 40°C  
**Relative Humidity:** Maximum relative humidity 80% for temperature up to 31°C decreasing linearly to 50% relative humidity at 40°C  
**Altitude:** Operating below 2000m  
**Storage Temperature:** -20°C to 60°C, < 80% R.H. (with battery removed)  
**Temperature Coefficient:** nominal 0.15 x (specified accuracy)/ °C @ (0°C -18°C or 28°C -40°C), or otherwise specified  
**Sensing:** True RMS sensing for all models  
**Safety:** Meets IEC61010-2-032 (1994), EN61010-2-032(1995), UL3111-2-032(1999).  
**Measurement Category:** III 600 Volts ac & dc

**Transient protection:** 6.5kV (1.2/50µs surge) for all models

**Pollution degree:** 2

**E.M.C.:** Meets EN61326(1997, 1998/A1), EN61000-4-2(1995), and EN61000-4-3(1996) an RF field of 3V/m:

Total Accuracy = Specified Accuracy + 45 digits performance above 3V/m is not specified

**Overload Protections:** ACA Clamp-on jaws: AC 1000A rms continuous + & COM terminals (all functions): 600VDC/VAC RMS  
 Power Supply : standard 1.5V AAA Size (NEDA 24A or IEC LR03) battery X 2

**Power Consumption:** Voltage, ACA, Hz & Power functions: 10mA typical

**HM & Temperature functions:** 4mA typical

**APO Timing:** Idle for 17 minutes

**APO Consumption:** 10µA typical

**Dimension:** L224mm X W78mm X H40mm

**Weight:** 224 gm approx

**Jaw opening & Conductor diameter:** 45mm max

**Special features:** Backlight display (model ACD-31P & ACD-41PQ only); AutoVATM (Auto Selection on ACV, DCV or ACA functions); Power measurement of selectable W, VAR & VA with dual-display Total Power Factor features; Total harmonic distortion THD%-F (model ACD-41PQ only); PEAK-rms HOLD

**ELECTRICAL SPECIFICATIONS**

Accuracy is ±(% reading digits + number of digits) or otherwise specified, at 23 oC ±5 oC less than 75% R.H. & True RMS (all models) ACV & ACA clamp-on accuracies are specified from 0% to 100% of range or otherwise specified. Maximum Crest Factor is as specified below, and with frequency spectrums, besides fundamentals, fall within the meter specified AC bandwidth for non-sinusoidal waveforms. Fundamentals are specified at 50Hz and 60Hz.

<b>AC Voltage</b>	
RANGE	Accuracy
<b>50Hz / 60Hz</b>	
600.0V	0.5% + 5d
<b>45Hz ~ 500Hz</b>	
600.0V	1.5% + 5d
<b>500Hz ~ 3.1kHz 9 (ACD-16 TRMS only)</b>	
600.0V	2.5% + 5d
<b>CMRR:</b> >60dB @ DC to 60Hz, Rs=1kΩ <b>Input Impedance:</b> 2MΩ, 30pF nominal <b>Crest Factor:</b> < 2.3 : 1 at full scale & < 4.6: 1 at half scale <b>ACV AutoVATM Threshold:</b> 30VAC (40Hz ~ 500Hz only) nominal	

<b>DC Voltage</b>	
RANGE	Accuracy
600.0V	0.5% + 5d
<b>NMR:</b> >50dB @ 50/60Hz <b>CMRR:</b> >120dB @ DC, 50/60Hz, Rs=1kΩ <b>Input Impedance:</b> 2MΩ, 30pF nominal <b>DCV AutoVATM Threshold:</b> 2.4VDC nominal	

<b>Ohms</b>	
RANGE	Accuracy
999.9Ω	1.0% + 6d
<b>Open Circuit Voltage:</b> 0.4VDC typical <b>Audible Continuity Tester</b> <b>Audible threshold:</b> between 10Ω and 300Ω. <b>Response time:</b> 250µs	

<b>ACA Current (Clamp-on)</b>	
RANGE	Accuracy <sup>1) 2)</sup>
<b>50Hz / 60Hz</b>	
40.00A, 400.0A, 1000A	1.0% + 5d
<b>45Hz ~500Hz</b>	
40.00A, 400.0A	2.0% + 5d
1000A	2.5% + 5d
<b>500Hz ~ 3.1kHz</b>	
40.00A, 400.0A	2.5% + 5d
1000A	3.0% + 5d
<b>ACA AutoVATM Threshold:</b> 1A AC (40Hz ~ 500Hz only) nominal <b>Crest Factor:</b> < 2.5:1 at full scale & < 5.0:1 at half scale for 40.00A & 400.0A ranges < 1.4:1 at full scale & < 2.8:1 at half scale for 1000A range <sup>1)</sup> Induced error from adjacent current-carrying conductor: < 0.06A/A <sup>2)</sup> Specified accuracy is from 1% to 100% of range and for measurements made at the jaw center. When the conductor is not positioned at the jaw center, position errors introduced are: Add 1% to specified accuracy for measurements made WITHIN jaw marking lines away from jaw opening) Add 4% to specified accuracy for measurements made BEYOND jaw marking lines toward jaws opening)	

<b>Temperature (ACD-31P only)</b>	
RANGE	Accuracy <sup>1)</sup>
-50°C ~ 300°C	2.0% + 3°C
-58°F ~ 572°F	2.0% + 6°F
<sup>1)</sup> Add 3°C (or 6°F) to specified accuracy @ -20°C ~ -50°C (or @ -4°F ~ -58°F) Type-K thermocouple range & accuracy not included	

<b>Total Power Factor (PF)</b>		
RANGE	Accuracy <sup>1)</sup>	
0.10 ~ 0.99	F ~ 21st	22nd ~ 51st
	3d	5d
<sup>1)</sup> Specified accuracy @ ACA fundamental > 2A ; ACV fundamental > 50V		

<b>Frequency</b>	
RANGE	Accuracy
5.00Hz ~ 500.0Hz	0.5%+4d
<b>Sensitivity (Sine RMS)</b> 40A range: > 4A 400A range: > 40A 1000A range: > 400A 600V range: > 30V	

<b>Frequency</b>	
RANGE	Accuracy
5.00Hz ~ 500.0Hz	0.5%+4d
40A range: > 4A	

<b>Power</b>				
RANGE	Accuracy <sup>1) 2)</sup>			
0 ~ 600.0kVA	F ~ 10th	11th ~ 46th	47th ~ 51st	
@ PF = 0.99 ~ 0.1	2.0%+6d	3.5%+6d	5.5%+6d	

<b>Power</b>				
RANGE	Accuracy <sup>1) 3)</sup>			
0 ~ 600.0kW / kVAR	F ~ 10th	11th ~ 25th	26th ~ 46th	47th ~ 51st
@ PF = 0.99 ~ 0.70	2.0%+6d	3.5%+6d	4.5%+6d	
@ PF = 0.70 ~ 0.50	3.0%+6d			10%+6d
@ PF = 0.50 ~ 0.30		4.5%+6d		
@ PF = 0.30 ~ 0.20		10%+6d		15%+6d

<sup>1)</sup> Specified accuracy is for ACA clamp measurement at the center of jaws. When the conductor is not positioned at the jaw center, position errors introduced are:  
 Add 1% to specified accuracy for ACA measurements made WITHIN jaw marking lines (away from jaw opening)  
 Accuracy is not specified for ACA measurement made BEYOND jaw marking lines (toward jaws opening)

<sup>2)</sup> Add 1% to specified accuracy @ ACA fundamental < 5A or ACV fundamental < 90V.  
 Accuracy is not specified @ ACA fundamental < 1A or ACV fundamental < 30V

<sup>3)</sup> Add 1% to specified accuracy @ ACA fundamental < 5A or ACV fundamental < 90V.  
 Accuracy is not specified @ ACA fundamental < 2A or ACV fundamental < 50V

**A-lags <sup>1)</sup> Indication:**

"A-lags" LCD annunciator turns on to indicate an inductive circuit, or Current A lags Voltage V (i.e., phase-shift angle is "+").


<sup>1)</sup>A-lags Indication is specified at 50/60Hz fundamental without harmonics, and at ACV > 90V, ACA > 9A, & PF < 0.95



# AMPROBE®

ACD-30P & ACD-31P

1000A Clamp-on Power Meters

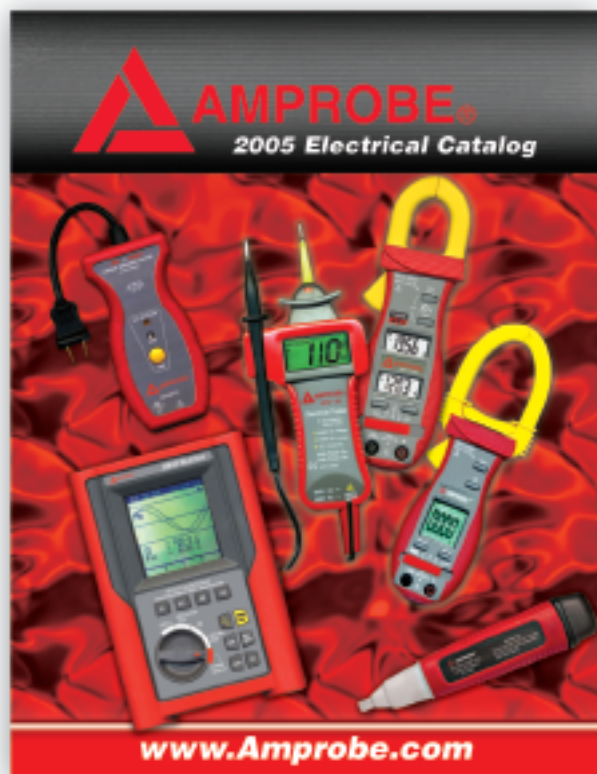

Miramar, FL 33025 • Toll Free: 800-327-5060 • Phone: 954-499-5400 • Fax: 866-287-7222 • [www.Amprobe.com](http://www.Amprobe.com)

**[www.AMPROBE.com](http://www.AMPROBE.com)**