



**Terminal blocks with screwed plugs for 5x20 GMA, 5 x 25, 10,3 x 38 13/32 x 1 1/2 in. D01, D02 (compression clamp)**

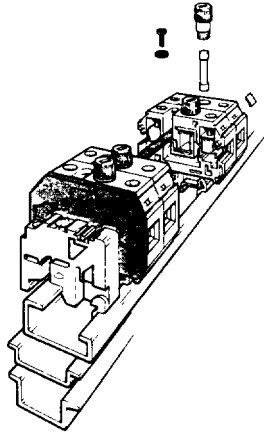

**MB 10/12.SF  
MB 10/12.SF1**

Spacing 12 mm (473'')

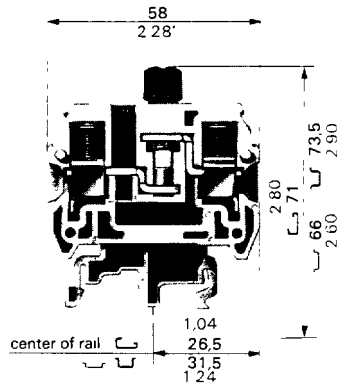


12 mm block, non fusion indicator (for 5x20 GMA and 5x25 fuses)

Grey body for 5x20 fuse  
**MB 10/12.SF 111 033.03**  
Grey body for 5x25 fuse (with mechan fusion indic)  
**MB 10/12.SF1 111 035.05**

**MB 10/12.SFL  
MB 10/12.SFD**

Spacing 12 mm (473'')




12 mm block with fusion indicator (for 5x20 GMA)

Grey body with neon fusion indicator 110-220 V  
**MB 10/12.SFL 111 034.04**  
Grey body with LED 24 V fusion indicator  
**MB 10/12.SFD 111 037.07**

**MB 10/12.SFD1**

Spacing 12 mm (473'')



12 mm block, non foot, with fusion (for 5x20 GMA)

Grey body with LED 24 V fusion indicator  
**MB 10/12.SFD1 111 038.10**

**Characteristics**

		DIN-VDE	UL	CSA	NFC-UTE	DIN-VDE	UL	CSA	NFC-UTE	DIN-VDE	UL	CSA	NFC-UTE
Wire size (see generalities)	Solid wire	0-16 mm <sup>2</sup>	18-6 AWG		0-16 mm <sup>2</sup>	0-16 mm <sup>2</sup>	18-6 AWG		0-16 mm <sup>2</sup>	0-16 mm <sup>2</sup>	18-6 AWG		0-16 mm <sup>2</sup>
	Stranded wire	0-10 mm <sup>2</sup>		0-10 mm <sup>2</sup>	0-10 mm <sup>2</sup>	0-10 mm <sup>2</sup>							
Rated voltage	V ~ AC = DC	500 (1) 600 (1)	600		500 (1) 500 (1)	500 (1) 600 (1)	600		500 (1) 500 (1)	500 (1) 600 (1)	600		500 (1) 500 (1)
Rated current	A	10			10	10			10	10			10
Rated wire size		10 mm <sup>2</sup>	6 AWG		10 mm <sup>2</sup>	10 mm <sup>2</sup>	6 AWG		10 mm <sup>2</sup>	10 mm <sup>2</sup>	6 AWG		10 mm <sup>2</sup>
<b>Other characteristics</b>		Wire stripping length	Recommended screwdriver	Recommended torque	Protection	Wire stripping length	Recommended screwdriver	Recommended torque	Protection	Wire stripping length	Recommended screwdriver	Recommended torque	Protection
		13 mm 51"	6 mm	1,2-1,4 Nm 106-12,3 lb.in	IP 10	13 mm 51"	6 mm	1,2-1,4 Nm 106-12,3 lb.in	IP 10	13 mm 51"	6 mm	1,2-1,4 Nm 106-12,3 lb.in	IP 10
Approvals (see relevant pages)		UL				UL				UL			

**Accessories**

	Type	P/N.	Type	P/N.	Type	P/N.
1 Rail	PR1 Z2	163 050.04	PR1 Z2	163 050.04	PR1 Z2	163 050.04
2 Rail	PR3	164 800.03	PR3	164 800.03	PR3	164 800.03
3 Rail	PR4	168 500.12	PR4	168 500.12	PR4	168 500.12
4 Rail	PR5	168 700.22	PR5	168 700.22	PR5	168 700.22
5 End stop (all rails)	BAM	th 9,1 mm 103 002.26	BAM	th 9,1 mm 103 002.26	BAM	th 9,1 mm 103 002.26
6 End section	FEM12S	th. 3 mm 117 628.22	FEM12S	th. 3 mm 117 628.22	FEM12S	th. 3 mm 117 628.22
7 Standard jumper bar	BJS12 (2)	25 poles (see access)				
8 Fuses	FU520	5 x 20 GMA	FU520	5 x 20 GMA	FU520	5 x 20 GMA
5x20 GMA and 5x25		0,5 A : 8 288.15		0,5 A : 8 288.15		0,5 A : 8 288.15
10,3x38 13/32x1 1/2 in		1 A : 8 290.13		1 A : 8 290.13		1 A : 8 290.13
D01		2 A : 8 291.00		2 A : 8 291.00		2 A : 8 291.00
D02		3,15 A : 8 289.16		3,15 A : 8 289.16		3,15 A : 8 289.16
		5 A : 8 292.01		5 A : 8 292.01		5 A : 8 292.01
	FU525	5 x 25 (with mechan fusion indic.)				
		1,6 A : 167 546.22				
		2 A : 167 547.23				
		2,5 A : 167 548.04				
		4 A : 167 549.05				
		6,3 A : 167 550.02				

R Terminal block and terminal board markers - see chapter on marking

Other accessories see chapter on accessories.

(1) Insulation voltage of terminal block - working voltage - according to fuse  
(2) Use of these accessories requires the cut-out of the block body by the user (precut)