



Representative photograph, actual product appearance may vary.

Due to regional agency approval requirements, some products may not be available in your area. Please contact your regional Honeywell office regarding your product of choice.

HOA1882-012

HOA Series Transmissive Sensor, Transistor Output, Plastic Package

Features

- Choice of phototransistor or photodarlington output
- Compact package size
- Dust protective housing
- 0.060 in [1.52 mm] dia. detector aperture
- 0.200 in [5.08 mm] slot width

Description

The HOA1882 series consists of an infrared emitting diode facing an NPN silicon phototransistor (HOA1882-011, -012) or photodarlington (HOA1882-013) encased in a black IR transmissive thermoplastic housing. Detector switching takes place whenever an opaque object passes through the slot between emitter and detector. The HOA1882 series employs an IR transmissive housing which features smooth optical faces without external aperture openings; this feature is desirable when aperture blockage from airborne contaminants is a possibility. The HOA1882 series employs plastic molded components. For additional component information see SEP8506/8706, SDP8406, and SDP8106.

Housing material is IR transmissive polysulfone. Housings are soluble in chlorinated hydrocarbons and ketones. Recommended cleaning agents are methanol and isopropanol.

HOA1882-012


HOA Series Transmissive Sensor, Transistor Output, Plastic Package

Product Specifications	
Product Type	IR Switch
On-State Collector Current	1.80 mA
Output	Transistor
Package Style	Side-Looking
Package Components	Plastic
Package Color	Black
Forward Current	20 mA
Continuous Forward Current	50 mA
Forward Voltage	1.6 V
Reverse Breakdown Voltage	3 V
Reverse Current	10 μ A
Housing Material	Polysulfone, IR Transmissive
Rise and Fall Time	15 μ s
Power Dissipation	100 mW
Operating Temperature Range	-40 °C to 85 °C [-40 °F to 185 °F]
Dark Current	100 nA
Collector-Emitter Breakdown Voltage	30 V
Emitter-Collector Breakdown Voltage	5 V
Collector-Emitter Saturation Voltage	0.4 V
Availability	Global
Product Name	Transmissive Sensor
Sensor Aperture	1,52 mm [0.060 in] dia.
Slot Width	5,08 mm [0.200 in]



HOA1882-012


HOA Series Transmissive Sensor, Transistor Output, Plastic Package

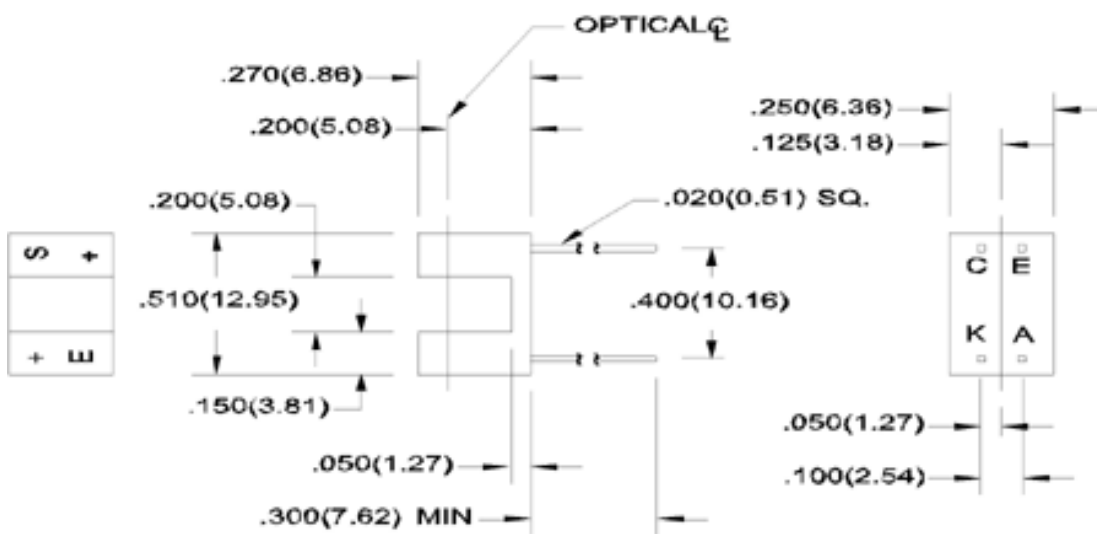

Honeywell

HOA1882-012

HOA Series Transmissive Sensor, Transistor Output, Plastic Package

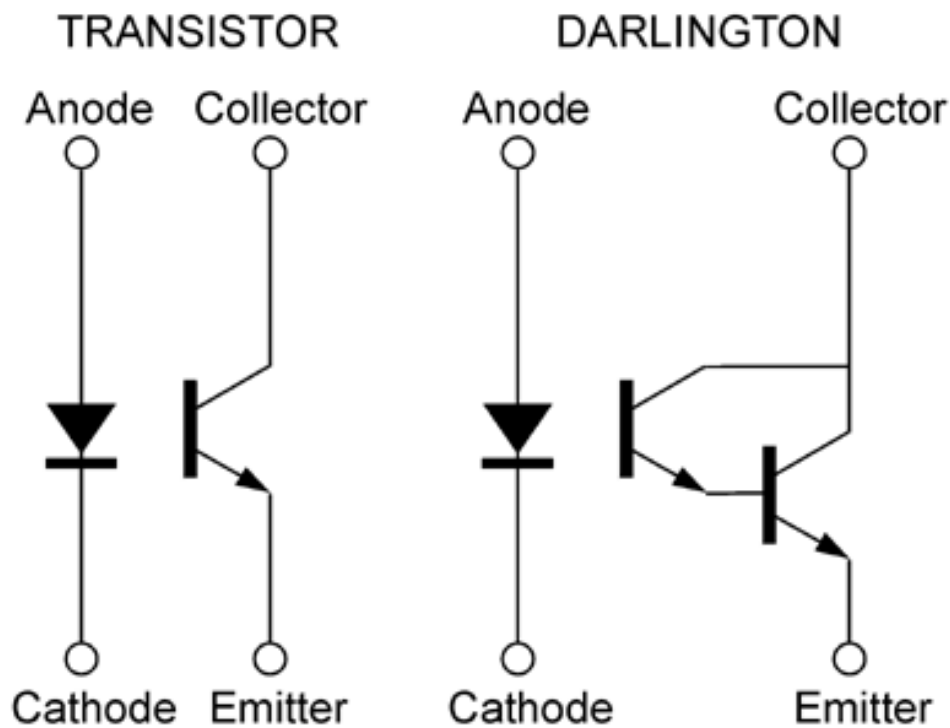

Honeywell

HOA1882-012

HOA Series Transmissive Sensor, Transistor Output, Plastic Package

WARNING

PERSONAL INJURY

DO NOT USE these products as safety or emergency stop devices, or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

WARNING

MISUSE OF DOCUMENTATION

- The information presented in this product sheet (or catalog) is for reference only. DO NOT USE this document as product installation information.
- Complete installation, operation and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.