# San Ace PWM Controller

#### Features

#### Reduces system power consumption and fan noise

For PWM fan speed control, a PWM control circuit needs to be newly designed and configured.


By using this product, however, PWM control function fans can be fully utilized without the need for preparing new circuits, contributing to reducing the system power consumption and the fan noise.

#### Can be common-powered by the fan power supply

The controller can be powered by the fan power supply of rated voltage 12, 24, and 48 VDC, and no separate supply is required.

#### Maximum of four fans connectable

Up to four fans with PWM control function can be connected and controlled.

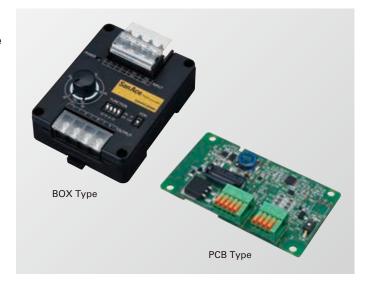


#### Specifications


	BOX Type	PCB Type		
Model no.	9PC8666X-S001	9PC8045D-V001	9PC8045D-R001	9PC8045D-T001
Size [mm]	86 (H) × 66 (W) × 38 (D)	80 (H) × 45 (W) × 17 (D)		
Rated voltage [VDC]	12, 24, and 48			
Power consumption [W]	0.2**1			
Operating voltage range [VDC]	7 to 60			
Operating temperature [°C]	-20 to +70			
Output PWM signal	V <sub>OH</sub> (high level voltage): 3.3 or 5 VDC (selectable), Frequency: 25 kHz			
No. of connectable fans	Up to 4 fans			
Control functions	Voltage control, Internal adjustment (variable resistor) control,	Voltage control	Variable resistor control*3	Thermistor control*3
	External adjustment (variable resistor) control*3, Thermistor control*2,3			
Mounting method	DIN rail mounting or screw mounting	Screw mounting		
Mass [g]	110	27		
Material	Case: Plastics	PCB: FR-4		

<sup>\*1:</sup> When output terminals are turned on 
\*2: Control functions are mutually exclusive for BOX Type.

#### Front View (component names)


BOX Type PCB Type

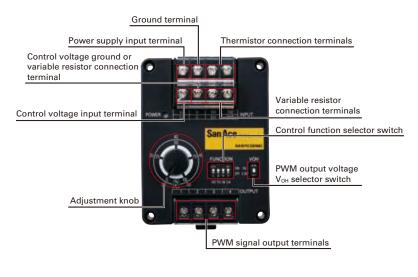




<sup>\*3:</sup> Variable resistor and thermistor are not supplied with the controller and need to be prepared separately.

# Connection Examples and PWM Signal Output Characteristics

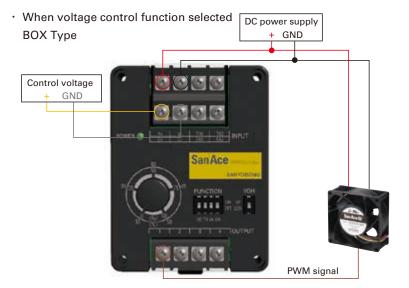


### PCB Type (Model no.: 9PC8045D-V001)

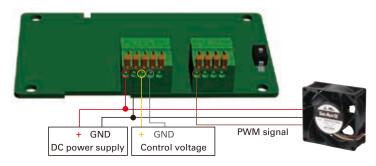


#### Control Voltage -Output Duty Cycle Characteristics

Output duty cycle controlled with input voltage of 0 to 5 VDC \*Please ensure that the input voltage does not exceed 5.5 VDC.

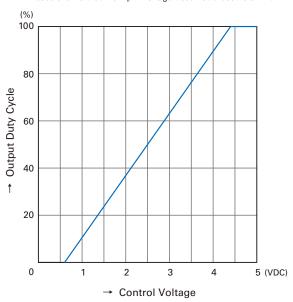

 When internal adjustment (variable resistor) control function selected BOX Type

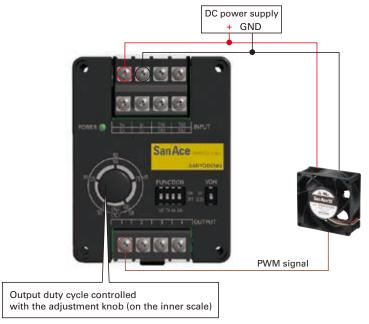

# Inner Scale Reading -Output Duty Cycle Characteristics

Output duty cycle controlled with the adjustment knob

(%)

100

75

50

1 25


0 25 50 75 100(%)

→ Inner Scale Reading with Adjustment Knob


# Connection Examples and PWM Signal Output Characteristics

 When external adjustment (variable resistor) control function selected BOX Type

DC power supply

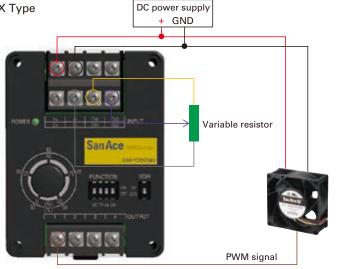



PCB Type (Model no.: 9PC8045D-R001)

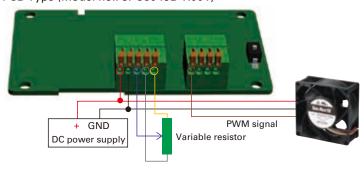

# Resistance - Output Duty Cycle Characteristics

Output duty cycle controlled with variable resistor connected to terminals Recommended total resistance: 10 k $\Omega$  Resistance increment characteristics: B (linear curve fitting)

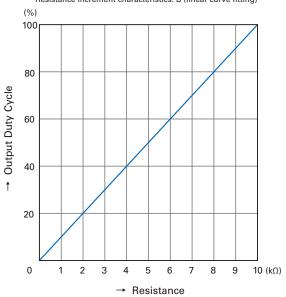

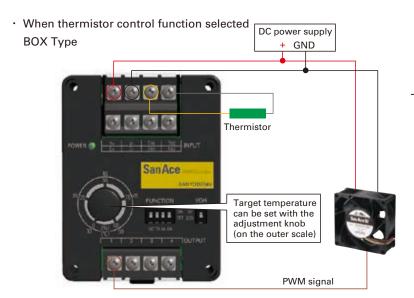

#### **Controlling Conditions**


 $T_{\text{ST}}\!\!:$  Temperature set with the adjustment knob (30 to 50  $^{\circ}\!\!\text{C}$ )

 $\mathsf{T}_{\mathsf{TH}}$ : Temperature detected with thermistor

Recommended thermistor conditions Type: NTC R<sub>25</sub> (Resistance at 25 °C): 10 k $\Omega$  B value: B<sub>25,05</sub> = 3435 K


Temperature conditions	Duty cycle	Fan rotational speed (For reference)
Тѕт <Ттн	Increases	Increases
Тѕт >Ттн	Decreases	Decreases
Тsт ≈Ттн	Maintained	Maintained

PCB Type (Model no.: 9PC8045D-T001)

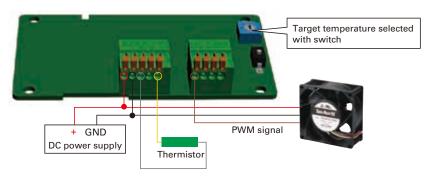


# Dimensions (unit: mm)

# **BOX Type**

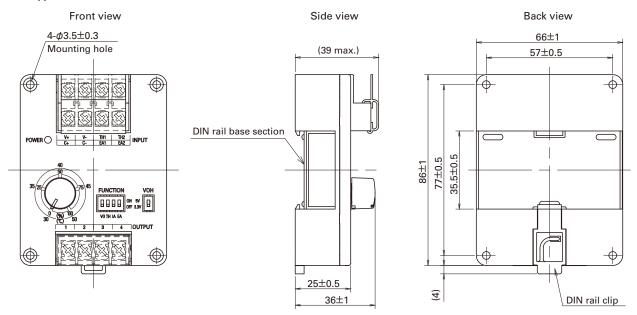

#### **PCB** Type

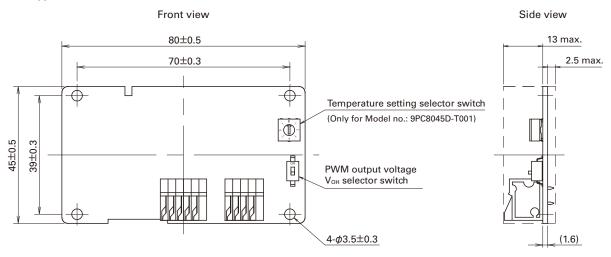

# **Precautions on use**

Before using the product, please read the included instructions manual carefully.

#### Notice

The products shown in this catalog are subject to Japanese Export Control Law. Diversion contrary to the law of exporting country is prohibited.