


Current Transformer Small Current *CT5 Series*

Features



- Designed for a 5 amp. primary (maximum 20 Amp), secondary current 5 ma.
- 40 - 1,000 Hz. operation.
- Customer to supply primary winding (1 turn through open top of transformer bobbin).
- Two hole chassis mount or P.C. board pin mount.
- Both units have 5 ma. secondary for use with standard AC ammeters with 5 ma. movements.
- High accuracy windings (1%)

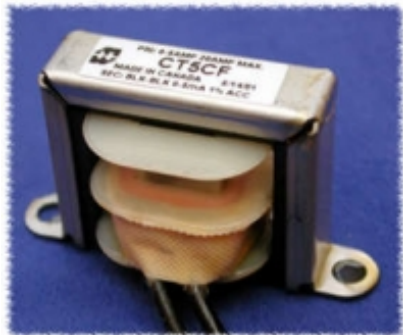

Application Data

To obtain current measurement:

1. Pass the wire carrying the current to be measured through the window of the CT transformer (acting as a primary winding).
2. Connect the CT secondary to an ammeter with a 5 mA movement.



Part No.	Overall Dimensions			Mounting	Ship Wt.
	H	D	W	Hole	oz.
CT5CF	1.25	1.10	2.06	0.19	2.6
CT5PC	1.40	1.08	1.03	n/a	1.8

Data subject to change without notice