


Digital Storage Oscilloscopes

TPS2012B • TPS2014B • TPS2024B Data Sheet

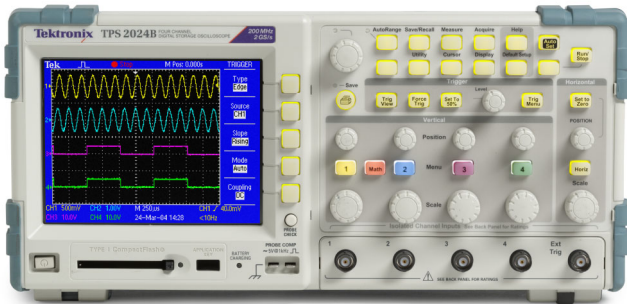

Features & Benefits

- 100 MHz and 200 MHz Bandwidths
- Sample Rates up to 2 GS/s Real Time
- 2 or 4 Fully Isolated and Floating Channels, plus Isolated External Trigger
- 8 Hours of Continuous Battery Operation with Two Batteries Installed, Hot Swappable for Virtually Unlimited Freedom from AC Line Power
- Optional Power Application Software offers the Broadest Range of Power Measurements at its Price Point
- Quickly Document and Analyze Measurement Results with OpenChoice® Software or Integrated CompactFlash® Mass Storage
- FFT Standard on All Models
- Advanced Triggers to Quickly Capture the Event of Interest


- Traditional, Analog-style Knobs and Multilanguage User Interface for Easy Operation
- Quick Setup and Operation with Autoset Menu, Autorange, Waveform and Setup Memories, and Built-in, Context-sensitive Help
- Backlit Menu Buttons for High Visibility
- 11 of the Most Critical Automatic Waveform Measurements

Applications

- Industrial Power Design, Troubleshooting, Installation, and Maintenance
- Advanced Electronics Design, Troubleshooting, Installation, and Maintenance
- Automotive Design and Test
- Education

TPS2000B Series Oscilloscopes for Powerful Productivity from Bench to Field

The TPS2000B Series offers a distinctive range of capabilities in an oscilloscope with controls and menus you will find familiar and easy to use. Available in 2- or 4-channel versions, the TPS2000B Series with IsolatedChannel™ technology provides isolation from ground and isolation between channels allowing you to take measurements with less worry about damaging circuitry. Battery power comes standard, making it a natural choice for field applications. For work on power electronics, optional software integrates commonly needed power system measurements into the instrument, speeding up power analysis and troubleshooting.

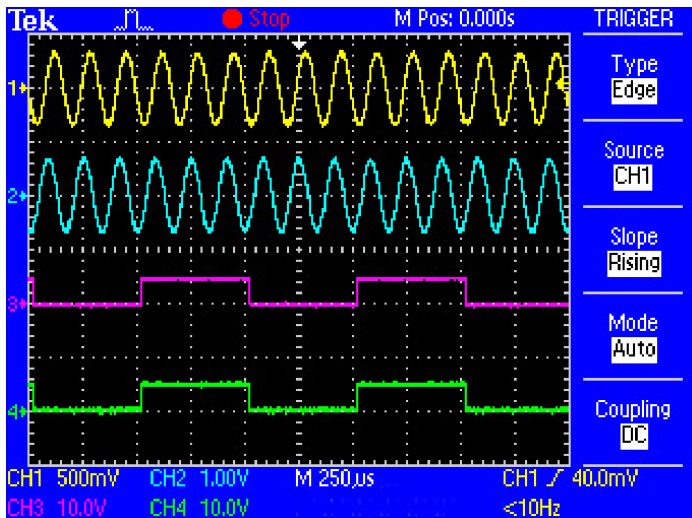

Four IsolatedChannel™ inputs and isolated external trigger input for quick, accurate, affordable floating and differential measurements.

Make Floating and Differential Measurements – Quickly, Accurately, Affordably

Unintentionally grounding a circuit under test is a common cause of poor measurement results and circuit damage. Connecting two or more grounded probes can cause ground loops, and if the current is high enough can result in ruined components and equipment. Most importantly, taking floating measurements without the proper instruments and probes can pose a safety hazard.


Tektronix IsolatedChannel technology simplifies floating measurements. Unlike ground-referenced oscilloscopes, the TPS2000B input connector shells are isolated from each other and from earth ground. Within the specified 600 V_{RMS} maximum float voltage, IsolatedChannel technology keeps current from flowing between the TPS2000B input BNC shells or from any BNC shell to earth.

Selecting the Right Probes for the Job

| Scope/Probe (Attenuation) | Maximum Safety Ratings | | TPS2000B Viewable Signal | |
|--|---------------------------------|------------------------------|--|--|
| | Reference Float Safety Rating*1 | Input Signal Safety Rating | On-screen Peak-Peak Voltage (Sinusoid centered at 0 V) | On-screen RMS Voltage (Sinusoid centered at 0 V) |
| TPS2000B Input (1X) | 600 V _{RMS} CAT II | 300 V _{RMS} CAT II | 40 V _{p-p} | 14.1 V _{RMS} |
| TPP0101 (100 MHz) TPP0201 (200 MHz) | 30 V _{RMS} | 300 V _{RMS} CAT II | 400 V _{p-p} | 141 V _{RMS} |
| P5120 (20X) | 600 V _{RMS} CAT II | 1000 V _{RMS} CAT II | 800 V _{p-p} | 282 V _{RMS} |
| P5122*2 (100X) | 600 V _{RMS} CAT II | 1000 V _{RMS} CAT II | 2828 V _{p-p} | 1000 V _{RMS} |

*1 Passive probe reference leads have no attenuation so any working voltage or over-voltage transients pass straight through to the scope reference. Thus, a passive probe reference float rating can never exceed the scope reference float rating.

*2 The P5122 probe should not be used for AC-coupled measurements on signals with greater than 300 V DC offset. The P5120 is the recommended probe for measuring ripple on high-voltage DC supplies.

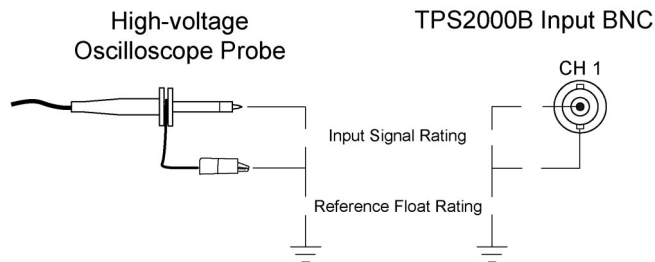


Input signal and float voltage maximum safety ratings.

Different passive probes are available, depending on your application. With the included TPP0101/TPP0201 passive probes, the TPS2000B can measure up to 400 V_{p-p}. However, to meet the safety rating of the TPP0101/TPP0201, the reference lead of the probe must be maintained within 30 V_{RMS} relative to ground. Because of this, the TPP0101/TPP0201 probes are well suited for working on digital and analog circuits in which the maximum voltage never exceeds 30 V_{RMS}.

Measurements on power conversion electronics usually require probes with higher voltage ratings. Tektronix offers two passive probes with insulation systems specifically designed for making floating measurements. Optional P5122 probes, when coupled with the TPS2000B, are suitable for making measurements on 480 V_{RMS} devices in Category II environments, with a maximum float voltage of up to 600 V_{RMS} relative to earth ground. With the optional P5120 probe the TPS2000B can measure up to 800 V_{p-p}, with a maximum float voltage within 600 V_{RMS} of ground. With the optional P5120 probe the TPS2000B can measure up to 800 V_{p-p} with a maximum float voltage within 600 V_{RMS} of ground. The P5120 is the best choice for making AC-coupled ripple measurements on high-voltage DC power supplies.

Please see “Characteristics” for complete safety ratings and specifications.

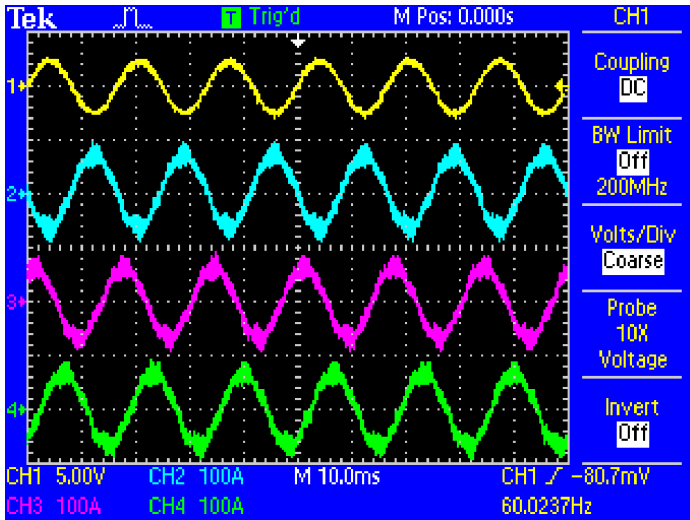

Perform three-phase power measurements of variable frequency drives.

Speed the Design and Test of Industrial Power Systems and Circuits

From mobile phones to industrial motor drives, power conversion technology has enabled significant advances in size, performance, and energy efficiency. But even the most basic task of viewing a converter's input and output is complicated by multiple voltage references. Multiple references also make it challenging to view signals from control circuits and power circuits at the same time. Using ground-referenced oscilloscopes in these applications, without appropriate differential probes, can damage circuits and produce bad measurements. For debugging power conversion electronics, IsolatedChannel technology reduces the risk of damage and unintended circuit interactions.

For performing power system measurements, TPS2PWR1 power application software is available as an option for the TPS2000B. It provides advanced power measurements right on the oscilloscope, at an entry-level price.




Conduct harmonic distortion measurements with TPS2PWR1 software.

For dialing in the performance of switching components, the power application software adds important measurements to the TPS2000B, including automatic switching loss, dv/dt , and di/dt cursor measurements.

For measurements on AC line voltage and for checking the impact on the power distribution system, the power application software shows harmonic content to the 50th harmonic, and provides phase, reactive power consumption, and power factor measurements. With the four-channel TPS2014B or TPS2024B, you can view three-phase voltages or currents.

Two power “bundles” are available, combining probes and measurement software. Each package combines four probes with the TPS2PWR1 power application software, at prices that are lower than if purchased separately. The TPS2PBD combines four P5120 20X passive, high-voltage probes with TPS2PWR1 power application software. The TPS2PBD2 combines four P5122 100X passive, high-voltage probes with the power application software.

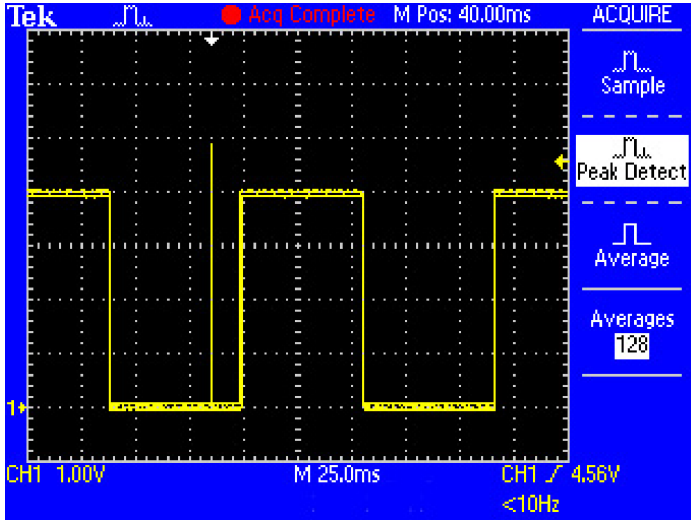

Capture elusive glitches – the first time – with Digital Real-Time (DRT) sampling technology.


Quickly Debug and Characterize Signals with DRT Sampling Technology

Characterize a wide range of signal types on up to four channels simultaneously with the TPS2000B Series Digital Real-Time (DRT) sampling technology. This acquisition technology makes it possible to capture high-frequency events, such as glitches and edge anomalies, that eludes other oscilloscopes in its class, so that you can be sure to get an accurate view of your signal.

Easily Analyze and Document Your Measurement Results

Quickly reveal signal interference, crosstalk, and the effects of vibration with frequency domain analysis using the TPS2000B Series Fast Fourier Transform (FFT) feature. Then, easily document your measurement results with the integrated CompactFlash® mass storage.

To capture, save, and analyze your measurement results on your PC, the included OpenChoice® PC software can be used. Every TPS2000B

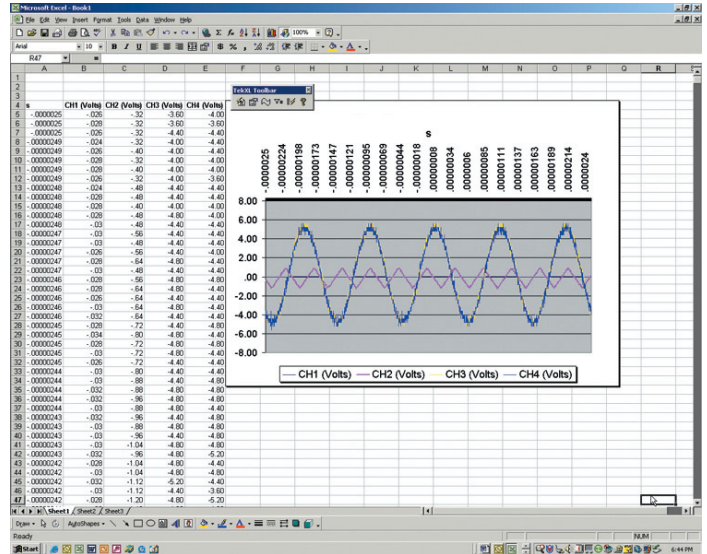

Speed documentation and analysis of measurements results with OpenChoice® software and integrated CompactFlash® mass storage.

Series also ships with a free copy of the special Tektronix Edition of National Instrument’s LabVIEW SignalExpress™ software for basic instrument control, data logging, and analysis. The optional Professional Edition of SignalExpress offers over 200 built-in functions that provide additional signal processing, advanced analysis, sweeping, limit testing, and user-defined step capabilities.

SignalExpress supports the range of Tektronix bench instruments*3, enabling you to connect your entire test bench. You can then access the feature-rich tools packed into each instrument from one intuitive software interface. This allows you to automate complex measurements requiring multiple instruments, log data for an extended period of time, time-correlate data from multiple instruments, and easily capture and analyze your results, all from your PC. Only Tektronix offers a connected test bench of intelligent instruments to simplify and speed debug of your complex design.

*3 To see the full range of Tektronix instruments supported by the Tektronix Edition of NI LabVIEW SignalExpress, visit www.tektronix.com/signalexpress.



Easily correlate your measurements between bench, lab, and field with the highly portable TPS2000B Series.

Correlate Your Measurements from Bench to Lab to Field*4

Use the TPS2000B Series on your bench, in the lab, or in the field, with the industry's longest continuous battery life – 8 hours and beyond – in a highly mobile package. Enjoy virtually unlimited freedom from an AC power source with hot-swappable batteries.

Optimize Your Productivity

The oscilloscope has a front-panel layout that most users will find familiar. Each channel has a dedicated set of scale and position controls. Reduce your measurement time with features like autose, autorange, automatic measurements, probe check wizard, and context-sensitive help. Backlit menu buttons help you work in a variety of challenging environments – from bright daylight to dimly lit areas.

Performance You Can Count On

In addition to industry-leading service and support, every TPS2000B Series oscilloscope comes backed with a three-year standard warranty.

*4 Please refer to Environmental and Safety specifications.



Enjoy virtually unlimited freedom from an AC power source with hot-swappable batteries.



Easily use the oscilloscope even in environments that challenge operation, with features such as analog-style knobs per channel and backlit menu buttons.

Characteristics

TPS2000B Series Electrical Characteristics

| Feature | TPS2012B | TPS2014B | TPS2024B |
|--|--|------------------|--------------------|
| Isolated Channels | 2 | 4 | 4 |
| Bandwidth* ⁵ (MHz) | 100 | 100 | 200 |
| Sample Rate (GS/s) per Channel | 1.0 | 1.0 | 2.0 |
| Record Length | 2.5k points | | |
| Display (1/4 VGA LCD) | Color | | |
| Battery Operation | Capacity for two hot-swappable battery packs One standard battery pack offers 4 hours of battery operation Optional second battery pack extends battery operation to 8 hours Continuous battery operation is possible by hot-swapping charged batteries | | |
| Automatic Measurements | 11 | | |
| Isolated External Trigger Input (Impedance isolated) | Yes | | |
| Vertical Resolution | 8 bits (normal or with averaging) | | |
| Vertical Sensitivity | 2 mV to 5 V/div on all models with calibrated fine adjustment | | |
| DC Vertical Accuracy | ±3% | | |
| Vertical Zoom | Vertically expand or compress a live or stopped waveform | | |
| Max Input Voltage (1 MΩ) | 300 V _{RMS} CAT II from BNC signal to BNC shell | | |
| Float Voltage | 600 V _{RMS} CAT II from BNC shell to earth ground | | |
| Position Range | 2 mV to 200 mV/div ±1.8 V >200 mV to 5 V/div ±45 V | | |
| Bandwidth Limit | 20 MHz | | |
| Linear Dynamic Range | ±5 div | | |
| Time Base Range | 5 ns to 50 s/div | 5 ns to 50 s/div | 2.5 ns to 50 s/div |
| Time Base Accuracy | 50 ppm | | |
| Input Impedance | 1 MΩ ±2% in parallel with 20 pF | | |
| Input Coupling | AC, DC, GND | | |
| Horizontal Zoom | Horizontally expand or compress a live or stopped waveform | | |
| FFT | Standard | | |
| RS-232, Centronics-Parallel Ports | Standard | | |
| PC Connectivity | Standard | | |
| Integrated CompactFlash® Mass Storage | Standard | | |
| Power Measurements | Optional package that offers instantaneous power waveform analysis, waveform analysis, harmonics analysis, switching loss, phase angles, dv/dt and di/dt cursors | | |

*⁵ Bandwidth is 20 MHz at 2 mV/div, all models. For TPS2024B, 200 MHz bandwidth is typical at 5 mV/div. Bandwidth is 200 MHz at 10 mV/div and above, for operating temperatures from 0 °C to 40 °C. Bandwidth is 180 MHz for all V/div settings 10 mV/div and above, for operating temperatures from 0 °C to 50 °C.

Acquisition Modes

| Mode | Description |
|-----------------|---|
| Peak Detect | High-frequency and random glitch capture. Captures glitches as narrow as 12 ns typical using acquisition hardware at all time/div settings from 5 μ s/div to 50 s/div |
| Sample | Sample data only |
| Average | Waveform averaged, selectable: 4, 16, 64, 128 |
| Single Sequence | Use the Single Sequence button to capture a single triggered acquisition sequence at a time |
| Scan/Roll Mode | At acquisition time-base settings of \geq 100 ms/div |

Trigger System (Main Only)

| Characteristic | Description |
|----------------|-------------------------------|
| Trigger Modes | Auto, Normal, Single Sequence |

Trigger Types

| Trigger | Description |
|--------------------------|--|
| Edge (Rising or falling) | Conventional level-driven trigger. Positive or negative slope on any input. Coupling Selections: AC, DC, Noise Reject, HF Reject, LF Reject |
| Video | Trigger on all lines or individual line, odd/even or all fields from composite video, or broadcast standards (NTSC, PAL, SECAM) |
| Pulse Width (or glitch) | Trigger on a pulse width less than, greater than, equal to, or not equal to a selectable time limit ranging from 33 ns to 10 s |

Trigger Source

| Characteristic | Description |
|------------------|--|
| 2-channel Models | CH1, CH2, Ext, Ext/5, Ext/10 |
| 4-channel Models | CH1, CH2, CH3, CH4, Ext, Ext/5, Ext/10 |

Trigger View

Displays trigger signal while trigger view button is depressed.

Trigger Signal Frequency Readout

Provides a frequency readout of the trigger source with 6-digit resolution.

Cursors

| Characteristic | Description |
|----------------|---|
| Types | Voltage, Time |
| Measurements | ΔT , $1/\Delta T$ (frequency), ΔV , dv/dt^{*6} , di/dt^{*6} |

Measurement System

| Characteristic | Description |
|---------------------------------|--|
| Automatic Waveform Measurements | Period, Frequency, +Width, -Width, Rise Time, Fall Time, Max, Min, Peak-to-Peak, Mean, Cycle RMS |

Waveform Processing

| Characteristic | Description |
|----------------|---|
| Operators | Add, Subtract, Multiply, FFT |
| FFT | Windows: Hanning, Flat Top, Rectangular; 2048 sample points |

Sources

| | |
|------------------|---|
| 2-channel Models | CH1 – CH2, CH2 – CH1, CH1 + CH2, CH1 \times CH2 |
| 4-channel Models | CH1 – CH2, CH2 – CH1, CH3 – CH4, CH4 – CH3, CH1 + CH2, CH3 + CH4, CH1 \times CH2, CH3 \times CH4 |
| Autoset Menu | Single-button, automatic setup of all channels for vertical, horizontal, and trigger systems, with undo autoset |
| Autorange | Allows the user to change test points without resetting the oscilloscope |

Autoset Menu for Multiple Signal Types

| Signal Type | Autoset Menu Choices |
|--------------------------|---|
| Square Wave | Single Cycle, Multicycle, Rising or Falling Edge |
| Sine Wave | Single Cycle, Multicycle, FFT Spectrum |
| Video (NTSC, PAL, SECAM) | Video (NTSC, PAL, SECAM) Field: All, Odd, or Even Line: All or Selectable Line Number |

Nonvolatile Storage

| Characteristic | Description |
|----------------------------|---|
| Nonvolatile Storage | CompactFlash [®] up to 2 GB |
| Reference Waveform Display | Two 2500 point reference waveforms |
| Waveform Storage | 96 or more reference waveforms per 8 MB |
| Setups | 4000 or more front-panel setups per 8 MB |
| Screen Images | 128 or more screen images per 8 MB (the number of images depends on file format selected) |
| Save All | 12 or more Save All operations per 8 MB. A single Save All operation creates 2 to 9 files (setup, image, plus one file for each displayed waveform) |

Display Characteristics

| Characteristic | Description |
|----------------|--------------------------------------|
| Display | 1/4 VGA Active TFT Color LCD display |
| Interpolation | Sin (x)/x |
| Display Types | Dots, vectors |
| Persistence | Off, 1 sec, 2 sec, 5 sec, Infinite |
| Format | YT and XY |

I/O Interface

| Characteristic | Description |
|---------------------------------------|---|
| RS-232 Port (Standard) | 9-pin DTE |
| RS-232 Programmability | Full talk/listen modes. Control of all modes, settings, and measurements. Baud rate up to 19,200 |
| Mass Storage CompactFlash® Memory | Accepts any Type 1 CompactFlash® card, up to and including 2 GB (card not included) |
| Built-in Clock/Calendar | |
| OpenChoice PC Communications Software | Seamless connection from oscilloscope to PC through RS-232. Transfer and save settings, waveforms, measurements, and screen images. Includes a Windows desktop data transfer application in addition to convenient Microsoft Word and Excel toolbar add-ins |
| Printer Port (Standard) | Centronics-type Parallel |
| Graphics File Formats | TIFF, PCX (PC Paint Brush), BMP (Microsoft Windows), EPS (Encapsulated Postscript), and RLE |
| Printer Formats | Bubble Jet, DPU-411, DPU-412, DPU-3445, Thinkjet, Deskjet, Laser Jet, Epson Dot (9- or 24-pin), Epson C60, Epson C80 |
| Layout | Landscape and Portrait |

*6 Requires TPS2PWR1 power application package.

Environmental and Safety

| Characteristic | Description |
|--|--|
| Temperature | |
| Operating | 0 °C to +50 °C |
| Nonoperating | -40 °C to +71 °C |
| Humidity | |
| TPS2000B Series oscilloscopes are not intended for use in wet or damp conditions | |
| Operating | High: 50 °C / 60% RH Low: 30 °C / 90% RH |
| Nonoperating | High: 55 °C to 71 °C / 60% RH max wet bulb Low: 30 °C to 0 °C / <90% RH max wet bulb |
| Altitude | |
| Operating | Up to 3,000 m |
| Nonoperating | 15,000 m |
| Pollution Degree 2 | Do not operate in an environment where conductive pollutants may be present (as defined in IEC61010-1:2001) |
| Enclosure Rating | |
| IP30 | When the CompactFlash® card and power analysis software are installed (as defined in IEC60529:2001) |
| Electromagnetic Compatibility | Meets the intent of Directive 89/336/EEC. Meets or Exceeds: Australian EMC Framework, demonstrated per Emission Standard AS/NZS 2064.1/2 |
| Safety | UL61010-1: 2004. CAN/CSA22.2 No. 1010.1: 2004. EN61010-1: 2001. Do not float the TPP0101/TPP0201 probe common lead to >30 V _{RMS} . Use the P5122, P5120 (floatable to 600 V _{RMS} CAT II) or similarly rated passive, high-voltage probe, or an appropriately rated high-voltage, differential probe when floating the common lead above 30 V _{RMS} |

CAT Ratings**Overvoltage Categories**

| Category | Examples of Products in this Category |
|----------|---|
| CAT III | Distribution-level mains, fixed installation |
| CAT II | Local-level mains, appliances, portable equipment |
| CAT I | Signal levels in special equipment or parts of equipment, telecommunications, electronics |

Materials – TPSBAT battery contains less than 8 grams equivalent Lithium.

Physical Characteristics**INSTRUMENT**

| Dimensions | mm | in. |
|------------------|-------|-------|
| Width | 336.0 | 13.24 |
| Height | 161.0 | 6.33 |
| Depth | 130.0 | 5.10 |
| Weight | | |
| Instrument Only | 2.7 | 6.0 |
| with 1 battery | 3.2 | 7.0 |
| with 2 batteries | 3.7 | 8.0 |

INSTRUMENT SHIPPING

| Package Dimensions | mm | in. |
|--------------------|-------|-------|
| Width | 476.2 | 18.75 |
| Height | 266.7 | 10.50 |
| Depth | 228.6 | 9.00 |

Ordering Information

TPS2012B, TPS2014B, TPS2024B

Digital Storage Oscilloscopes.

Standard Accessories

| Accessory | Description |
|---|---|
| Probes | TPP0101 100 MHz, 10X passive probe for TPS2012B and TPS2014B; TPP0201 200 MHz, 10X passive probe for TPS2024B; one probe per channel standard |
| Battery (1) | Lithium-ion battery with fuel gauge for 4-hour battery life. Two batteries required for 8 hours of continuous battery operation |
| USB to RS-232 Cable | A cable to connect to a PC USB port through the RS-232 port on the backside of the scope |
| OpenChoice® PC Connectivity Software | A collection of programs that enable fast and easy communication between MS Windows PCs and TPS2000B Series oscilloscopes |
| NI SignalExpress™ Tek Edition Software | A program that enables easy communication between PC-based NI SignalExpress software and TPS2000B Series oscilloscopes |
| Documentation | User Manual (please see below for available language options) |
| AC Adapter with Power Cord | |
| NIM/NIST-Traceable Certificate of Calibration | |
| Front Protective Cover | |

Recommended Accessories

| Accessory | Description |
|-------------|---|
| TPS2PBND2 | Power bundle for TPS2000B oscilloscopes. Includes (4) P5122 passive, 100X high-voltage probes and TPS2PWR1 power measurement and analysis software |
| TPS2PWR1 | Power measurements application package. Instantaneous power waveform analysis, waveform analysis, harmonics analysis, switching loss, phase angles, dv/dt and di/dt cursors |
| WSTR0 | WaveStar software; Microsoft Windows application for waveform capture, analysis, documentation, and control from your PC. Provides enhanced oscilloscope data measurement, analysis, remote setup and charting features |
| TPSBAT | Additional battery |
| TPSCHG | Battery charger |
| AC2100 | Soft case for carrying instrument |
| HCTEK4321 | Hard case for carrying instrument (requires AC2100) |
| 077-0447-xx | Service Manual – English only |
| 077-0444-xx | Programmer Manual – English only |

Recommended Probes

| Accessory | Description |
|------------------|---|
| A621 | 2000 A, 5-50 kHz AC current probe/BNC |
| A622 | 100 A, 100 kHz AC/DC current probe/BNC |
| P5122*2 | 200 MHz passive 100X high-voltage probe |
| P5205 | High-voltage active differential probe (1300 V _{p-p} , 100 MHz) (1103 power supply required) |
| P5210 | High-voltage active differential probe (5600 V _{p-p} , 50 MHz) (1103 power supply required) |
| CT2 | 2.5 A, 200 MHz AC current probe |
| TCP202 | 15 A, 50 MHz AC/DC current probe (1103 power supply required) |
| TCP303/TCPA300 | 150 A, 15 MHz AC/DC current probe/amplifier |
| TCP305/TCPA300 | 50 A, 50 MHz AC/DC current probe/amplifier |
| TCP312/TCPA300 | 30 A, 100 MHz, DC/AC current probe/amplifier |
| TCP404XL/TCPA400 | 500 A, 2 MHz AC/DC current probe/amplifier |

*2 The P5122 probe should not be used for AC-coupled measurements on signals with greater than 300 V DC offset. The P5120 is the recommended probe for measuring ripple on high-voltage DC supplies.

International Power Plugs

| Option | Description |
|----------|-----------------------------|
| Opt. A0 | North America power |
| Opt. A1 | Universal Euro power |
| Opt. A2 | United Kingdom power |
| Opt. A3 | Australia power |
| Opt. A5 | Switzerland power |
| Opt. A6 | Japan power |
| Opt. A10 | China power |
| Opt. A11 | India power |
| Opt. A12 | Brazil power |
| Opt. A99 | No power cord or AC adapter |

Accessory Cables

| Cable | Description |
|-------------|--|
| 012-1241-xx | RS-232, 9-Pin Female to 25-Pin Male, 4.6 m (15 ft.), for modems |
| 012-1651-xx | RS-232, 9-Pin Female to 9-Pin Female, null modem, for computers |
| 012-1380-xx | RS-232, 9-Pin Female to 25-Pin Female, null modem, for computers |
| 012-1214-xx | Centronics, 25-Pin Male to 36-Pin Centronics, 2.4 m (8 ft.), for parallel printer interfaces |

International User Manual Language Options

Translated front-panel overlay included with its respective user manual.

| Option | Description |
|----------|-----------------------------------|
| Opt. L0 | English (071-1441-xx) |
| Opt. L1 | French (071-1442-xx) |
| Opt. L2 | Italian (071-1443-xx) |
| Opt. L3 | German (071-1444-xx) |
| Opt. L4 | Spanish (071-1445-xx) |
| Opt. L5 | Japanese (071-1446-xx) |
| Opt. L6 | Portuguese (071-1447-xx) |
| Opt. L7 | Simplified Chinese (071-1448-xx) |
| Opt. L8 | Traditional Chinese (071-1449-xx) |
| Opt. L9 | Korean (071-1450-xx) |
| Opt. L10 | Russian (071-1451-xx) |

Warranty Information

Three-year warranty covering all labor and parts, excluding probes and accessories.

Speed Product Development with Best-in-Class Price/Performance

The extensive Tektronix portfolio of proven, state-of-the-art stimulus, probing, acquisition, and analysis tools simplify and speed each phase of product design – from power-on and verification, through debug and validation, to characterization and test – to enable you to race products to your customers when they need them, if not before.

Tektronix Support Completes the Solution

Anytime you need support, anywhere in the world, depend on Tektronix Support to give you the lowest possible exposure to inconvenience, delay, or disruption of operations. www.tektronix.com/support

- Unsurpassed technical expertise and experience with 24-hour response to technical questions
- Industry-leading turnaround service time
- 90-day unconditional service warranty
- No fine print, no exclusions, no surprises
- Global support in more than 50 countries

Contact Tektronix:

ASEAN / Australasia (65) 6356 3900
Austria 00800 2255 4835*
Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777
Belgium 00800 2255 4835*
Brazil +55 (11) 3759 7627
Canada 1 800 833 9200
Central East Europe and the Baltics +41 52 675 3777
Central Europe & Greece +41 52 675 3777
Denmark +45 80 88 1401
Finland +41 52 675 3777
France 00800 2255 4835*
Germany 00800 2255 4835*
Hong Kong 400 820 5835
India 000 800 650 1835
Italy 00800 2255 4835*
Japan 81 (3) 6714 3010
Luxembourg +41 52 675 3777
Mexico, Central/South America & Caribbean 52 (55) 56 04 50 90
Middle East, Asia, and North Africa +41 52 675 3777
The Netherlands 00800 2255 4835*
Norway 800 16098
People's Republic of China 400 820 5835
Poland +41 52 675 3777
Portugal 80 08 12370
Republic of Korea 001 800 8255 2835
Russia & CIS +7 (495) 7484900
South Africa +41 52 675 3777
Spain 00800 2255 4835*
Sweden 00800 2255 4835*
Switzerland 00800 2255 4835*
Taiwan 886 (2) 2722 9622
United Kingdom & Ireland 00800 2255 4835*
USA 1 800 833 9200

* European toll-free number. If not accessible, call: +41 52 675 3777

Updated 10 February 2011

For Further Information. Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit www.tektronix.com



Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.

19 Apr 2012

3MW-17750-9

