


# Other World Computing



Insert your SSD module into the interposer board connector - it is keyed so it will only fit one direction. The SSD module plugs straight into the connector and fits snugly. Make absolutely certain that the SSD module is fully inserted before continuing! Use the shorter Torx T5 screw to secure the SSD module into the enclosure.

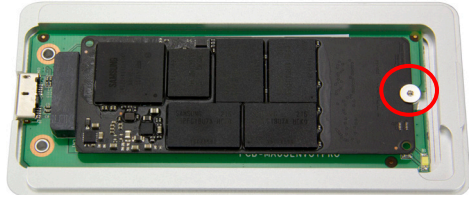

Slide the top cover back onto the bottom, locking it in place.



Turn the OWC Envoy Pro over and use the two Torx T5 screws to secure the case together. Apply the rubber foot to complete the assembly.

Your OWC Envoy Pro connects using the included USB cable. If your SSD module is unformatted, you will need to format it to be able to use it.

[http://eshop.macsales.com/tech\\_center/fwhdd.cfm](http://eshop.macsales.com/tech_center/fwhdd.cfm)



## 1.1 System Requirements

## 1.1.1 Mac Requirements


- Minimum PowerPC G4 CPU, 128MB RAM
- USB 3.0/2.0 interface, Mac OS X 10.2 or later

## 1.1.2 PC Requirements

- Minimum 500MHz Intel Pentium III CPU, 128MB RAM
- USB 3.0/2.0 interface, Windows 2000 / XP / Vista / Windows 7 / Windows 8

## 1.1.3 Supported SSD Drives

- MacBook Pro Retina SSD (13" & 15" models)
- OWC Aura Pro SSD for the MacBook Pro Retina\*

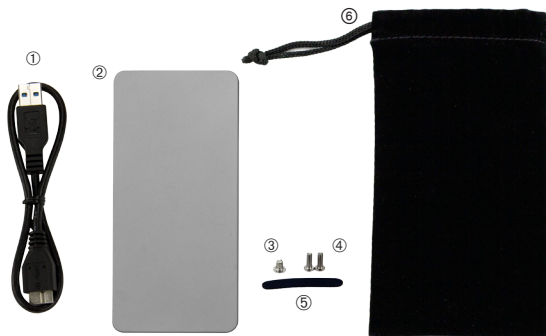

## Item

- ① USB 3.0 (A - Micro-B) cable
- ② OWC Envoy Pro\*
- ③ Short T5 screw to fasten SSD drive
- ④ (2) long T5 screws to fasten enclosure
- ⑤ Adhesive rubber foot
- ⑥ Plush storage bag
- ⑦ Owner's manual & assembly guide



\* This Envoy Pro is thermally configured for an original factory, Apple SSD. If you wish to install an OWC Aura Pro SSD, please contact customer support.



Your computer is a static-sensitive device. It is susceptible to invisible damage if not protected during installation.

We recommend proper grounding by using a grounding strap. Make sure to work in a clean and static-free area, and avoid wearing clothing that retains static charges.

For more information, please visit  
<http://www.macsales.com/static>




The OWC Envoy Pro is compatible with both factory MacBook Pro Retina SSD modules and OWC Aura Pro for MacBook Pro Retina SSD modules.

**NOTE:** This Envoy Pro is thermally configured for an original factory, Apple SSD. If you wish to install an OWC Aura Pro SSD, please contact customer support.



The Envoy Pro arrives needing its cover removed to access the drive bay. Simply slide the top towards the LED on the front of the enclosure to unlock it.

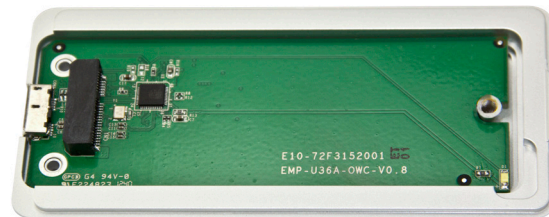

Removing the top cover will expose the interposer board inside of the OWC Envoy Pro.