

TECHNICAL REFERENCE:

Voltage: AC110-240V, 50/60Hz

POWER: 20W

Light Source: 4PCS*3W High power LED

Four Control modes: Auto-run, DMX512, voice control, Master-slave model

DMX Channels: 8 CH

Package: 4PCS/Carton

Inner Package: 270*215*240 MM

Out Package: 460*290*520 MM

N.W.: 6.5 kg/carton

G.W.: 8kg/carton



VISIT US ONLINE:

Have a question?

Need service or repair?

Want to leave a comment?

PyleUSA.com/ContactUs

PYLE

PYLE

PyleUSA.com

PDJLT20



LED DISCO EFFECT LIGHT User Manual

Please Read Over This Manual before Operating the Light Fixture


DESCRIPTION

- With the music rhythm, light shines accordingly. Attracting people's eyes.
- Strobe effects, red, green and blue three colors change.
- Its light spot on the wall, the effect likes glass ball, very bright and powerful.
- High quality warranty, safe and reliable.
- Long working life, excellent stability (can reach 60,000.00 hours in general circs).
- Small and exquisite appearance.
- Suitable for disco, ballroom, KTV, bar, stage, club, party etc.

SECURITY:

1. Make sure that the user voltage is not higher or lower than the regulated value from this user manual.
2. Please take more attention while installing the fixtures. Avoid touching exposed AC cord or will cause deadly accident.
3. When installing the fixtures, make sure the fixtures are not exposed in extremely hot, humid or dusty environment. Make sure the distance between the fixture and the lighted object is not less than 0.5 meter. Make sure there is no combustibile or explosive object around 0.5 meters.

DISPLAY SETTING:

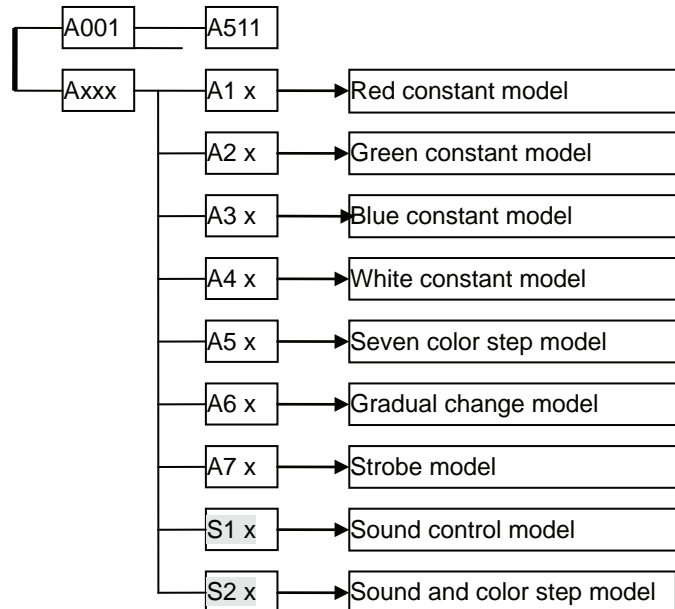

PDJLT20 CONTROL :

CH	Channel data	Function
CH1	0-255	Dimmer
CH2	0	Red color LED go out
	1-255	Red color LED dimming, brightness from dark to bright
CH3	0	Green color LED go out
	1-255	Green color LED dimming, brightness from dark to bright
CH4	0	Blue color LED go out
	1-255	Blue LED dimming, brightness from dark to bright
CH5	0	White color LED go out
	1-255	White LED dimming, brightness from dark to bright
	0	White color LED go out
	1-255	LED strobe, speed from slow to fast
CH7	0-127	Electrical machine position
	128-191	Electrical machine unlimited rotate forward direction, speed from slow to fast
	192-255	Electrical machine unlimited rotate forward direction, speed from fast to slow
CH8	0	CH1 to CH5 function
	10-37	Au01
	38-65	Au02
	66-93	Au03
	...	S2 x