




4 Way Compact Signal Booster 27813HSR



TV and Radio Signal Booster with 4G filter

Features & Benefits

- **BOOSTS TV or RADIO SIGNALS** - Ideal for improving picture quality and channel reception, perfect for Freeview and DAB signals in areas with low signal strength
- **11dB GAIN MINIMISES SIGNAL LOSS** - Distributes aerial signals to four outlets with minimal signal loss and low noise. Ideal for installations with long cable runs
- **EASY INSTALLATION** - Set-up in seconds, simply plugs into the power adaptor supplied, then is connected to the Antenna In ports on your TVs or radios/tuners, and an aerial lead connected to an existing aerial
- **4G FILTERING** - Provides a typical 45dB protection from signals produced by 4G mobile phone masts reducing possible interference and signal loss

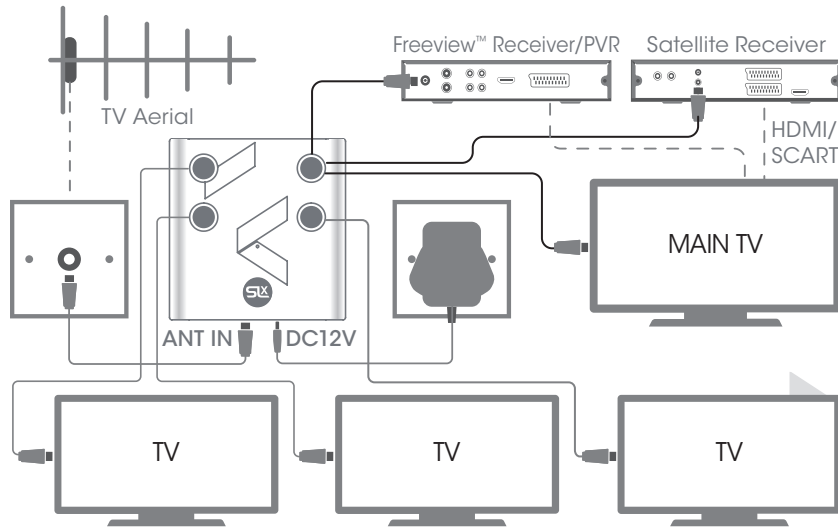

C/W Power Supply Unit
Input: 100-240V ~ 50/60Hz
Output: 12V= 100mA

Technical Specification:

| Booster | In | Out | Frequency | Suitable for | Max Gain | Noise | Isolation Out/Out | Max Output | Typ. 4G Protection |
|----------|----|-----|-----------|------------------------------------|----------|-------|-------------------|------------|--------------------|
| 27813HSR | 1 | 4 | 88-782MHz | FM/DAB/ TV Ch 21-59 Freeview | 11dB | <2dB | 18dB | 98dBµV | >45dB |

Distributed By:



www.philex.com