

TECHNICAL DATA SHEET

Terminal Blocks

**RoHS
Compliant**


Part No.	L(mm)	W(mm)	H(mm)	A(mm)	B(mm)	E(mm)	D(mm)	mm ²	Volt	Amp	Material	Colour	Pack
3ANYL	90.3	15.5	11.5	6	7.7	2.15	3	4	400V	3A	PA	White	1pc or 10pc
6ANYL	110.5	15.5	12.4	6.5	9.5	3.5	4.2	6	400V	6A			
10ANYL	116.7	20	14.9	8	10	2.75	4.2	10	400V	10A			
15ANYL	136.8	21.5	16.7	10	11.7	3.6	4.5	12	400V	16A			
30ANYL	165	25	20	12	14.1	4.6	6.6	16	400V	30A			
60ANYL	187.6	29	23.5	12	16	4.4	7.3	25	400V	60A			
3ATRANS	90.3	15.5	11.5	6	7.7	2.15	3	4	400V	3A	PE	Trans	
6ATRANS	110.5	15.5	12.4	6.5	9.5	3.5	4.2	6	400V	6A			
10ATRANS	116.7	20	14.9	8	10	2.75	4.2	10	400V	10A			
15ATRANS	136.8	21.5	16.7	10	11.7	3.6	4.5	12	400V	16A			
30ATRANS	165	25	20	12	14.1	4.6	6.6	16	400V	30A			
3ABLK	90.3	15.5	11.5	6	7.7	2.15	3	4	400V	3A			
6ABLK	110.5	15.5	12.4	6.5	9.5	3.5	4.2	6	400V	6A			
10ABLK	116.7	20	14.9	8	10	2.75	4.2	10	400V	10A			
15ABLK	136.8	21.5	16.7	10	11.7	3.6	4.5	12	400V	16A			
30ABLK	165	25	20	12	14.1	4.6	6.6	16	400V	30A			

Materials Used:

Tube	Brass
Screw	Steel - zinc colour plated

Max ambient temperature:

110°C for PA, 80°C for PE

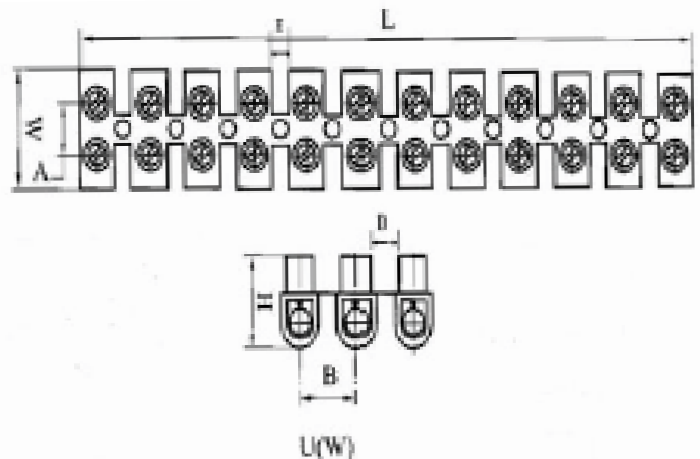

Important Notice: This data sheet and its contents (the "Information") belong to pro-POWER. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but pro-POWER assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where pro-POWER was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict pro-POWER's liability for death or personal injury resulting from its negligence.