


Spectrum Analyzer

multicomp PRO

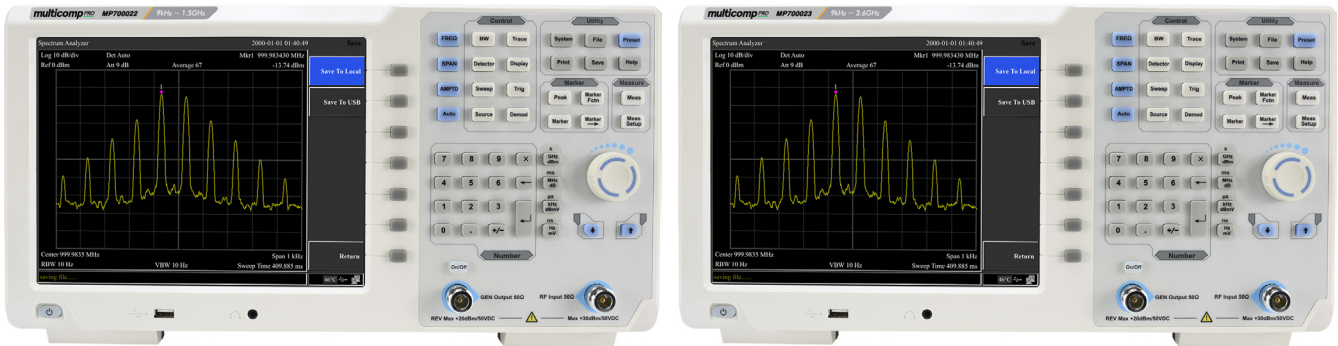

Features

- Frequency Range from 9KHz up to 1.5GHz, 9KHz up to 3.6GHz
- 150dBm Displayed Average Noise Level
- Phase Noise -82dBc/Hz @ 1Gz and offset at 10KHz
- Total Amplitude Accuracy <1.5dB
- 10Hz Minimum Resolution Bandwidth (RBW)
- EMI Pre-compliance Test Kit
- Up to 1.5 GHz Tracking Generator Kit
- 10.4" TFT LCD display

Performance Specifications

Parameters	MP700022 EU-UK	MP700023 EU-UK
Frequency Range	9KHz - 1.5GHz	9KHz - 3.6GHz
Frequency Resolution	1Hz	
Frequency span		
Range	0Hz, 100Hz to maximum frequency of device	
Accuracy	$\pm \text{span} / (\text{swept points} - 1)$	
Internal Reference		
Reference Frequency	10 MHz	
Reference Frequency Accuracy	$\pm[(\text{days from last calibrate} \times \text{freq. aging rate}) + \text{temperature stability} + \text{initial accuracy}]$	
Temperature Stability	<2.5ppm (15°C to 35°C)	
Aging Rate	<1ppm/year	
Readout		
Marker Frequency Resolution	span/ (the number of sweep points -1)	
Uncertainty	$\pm(\text{freq indication} \times \text{freq reference uncertainty} + 1\% \times \text{span} + 10\% \times \text{resolution bandwidth} + \text{Marker Frequency Resolution})$	
Frequency Counter		
Resolution	1Hz, 10Hz, 100Hz, 1kHz	
Accuracy	$\pm(\text{marker freq} \times \text{freq reference uncertainty} + \text{counter resolution})$	

Newark.com/exclusive-brands
 Farnell.com/exclusive-brands
 Element14.com/exclusive-brands

multicomp PRO

Parameters	MP700022 EU-UK	MP700023 EU-UK
Bandwidth		
Resolution Bandwidth (-3 dB)	10Hz to 500kHz (in 1 to 10 sequence), 1MHz, 3MHz	
Resolution Filter Shape factor	<5:1 nominal (Digital implement, similar to Gauss Pattern)	
Accuracy	<5% nominal	
Video Bandwidth (-3 dB)	10Hz to 3MHz	
Amplitude Specification		
Amplitude and Electric Level		
Amplitude Measurement Range	DANL to +20 dBm, close the preamplifier	
Reference Electric Level	-80 dBm to +30 dBm, 0.1dBm steps	
Preamplifier	20dB, nominal, 9kHz~1.5GHz	
Input Attenuator Range	0~39 dB, 3 dB steps	
Max. Input DC Voltage	50V DC	
Max. Continuous Power	30dBm, average continuous power	
Displayed average noise level (DANL)		
	Input attenuation 0 dB, 1Hz resolution bandwidth	
Preamp Off	1MHz~10MHz -130dBm (nominated)	
	10MHz~1GHz -130dBm (nominated)	
	1GHz~1.5GHz -128 dBm (nominated)	1GHz~3.6 GHz -128 dBm (nominated)
Preamp On	1MHz~10MHz -150dBm (nominated)	
	10MHz~1GHz -150dBm (nominated)	
	1GHz~1.5GHz -148 dBm (nominated)	1GHz~3.6 GHz -148 dBm (nominated)
Phase noise		
	20°C ~30°C, fc = 1GHz	
Phase noise	<-82 dBc/Hz @10kHz offset	
	<-100 dBc/Hz @100kHz offset	
	<-110 dBc/Hz @1MHz offset	
Level Display Range		
Log Scale Coordinate	1dB ~255dB	
Linear Scale Coordinate	0 to reference level	
Level Unit	dBm, dBuW, dBpW, dBmV, dBuV, W,V	
Points	201~1001	
Number of Traces	5	
Detectors	Positive-peak, negative-peak, sample, normal, RMS	
Trace Functions	Clear write, Max Hold, Min Hold, View, Blank, Average	
Frequency response		
	20°C~30°C, 30%~70% relative humidity, 20dB input attenuation, reference 50MHz	
Preamp off	±0.8 dB	
Preamp on	±0.9 dB	

Spectrum Analyzer

multicomp PRO

Parameters	MP700022 EU-UK	MP700023 EU-UK
Accuracy		
Input Attenuation Switching Uncertainty	20°C~30°C, fc=50 MHz, Preamplifier Off, 20dB RF attenuation, input signal 0~39 dB ±0.5 dB	
Absolute Amplitude Uncertainty	20°C~30°C fc=50 MHz, RBW=1 kHz, VBW=1 kHz, peak detector, 20dB RF attenuation Preamplifier Off ±0.4dB, input signal= -20dBm Preamplifier On ±0.5 dB, input signal= -40dBm	
Uncertainty	input signal range 0dbm ~ -50dbm ±1.5dB	
VSWR	Input 10dB RF attenuation, 1MHz~1.5GHz <1.5, nominal	
Distortion and Spurious Response		
Second Harmonic Distortion	fc ≥ 50 MHz, Preamp off, signal input -30 dBm, 0 dB RF attenuation, 20°C~30°C -65dbc	
Third-order Intermodulation	fc ≥50MHz +10 dBm	
1 dB Gain Compression	fc ≥ 50 MHz, 0 dB RF attenuation, Preamp off , 20°C~30°C +2 dBm, nominal	
Residual Response	Connect 50Ω load at input port, 0 dB input attenuation, 20°C~30°C <-85dBm, Nominated	
Input Related Spurious	-30 dBm signal at input mixer, 20°C~30°C <-60 dBc	
Sweep Time and Triggering		
Span Range	100Hz≤SPAN≤3GHz 10ms to 3000s zero sweep width 1ms to 3000s	
Mode	Continue, Single	
Trigger	Free run, Video, External	
Tracking Generator		
Output frequency range	100 kHz~1.5GHz	
Output power level range	-30 dBm~0 dBm	
Output power level resolution	1DB	
Output flatness	±3 dB	
Maximum safe reverse level	Average total power: 30 dBm, DC : ±50V DC	
Inputs and Outputs		
Front panel RF input connector	50Ω, N-type female	
Front panel track generator output	50Ω, N-type female	
10 M reference input	50Ω, N-type female	
Communication Port	USB HOST, USB DEVICE, LAN, earphone port, REF and VGA	

Parameters	MP700022 EU-UK	MP700023 EU-UK
General Technical Specification		
Display	TFT LCD, 10.4 inches	
Weight (without package)	5 kg	
Dimension (W × H × D)	421mm × 221mm × 115mm	
Working temperature	0 to +40°C	
Storage temperature	-20°C to +60°C	
Power	100V AC to 240V AC 50/60Hz	
Standard Accessories Included	Power cord, USB cable, CD-Rom, Manual	
Power Cord Plug Type	UK / EU	
Warranty	12 months	

Part Number Table

Description	Part Number
Spectrum Analyser, 9KHz - 1.5GHz	MP700022 EU-UK
Spectrum Analyser, 9KHz - 3.6GHz	MP700023 EU-UK

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.